

EMI Suppression Capacitors Y2 Class 300VAC

MEY-300V Series

MERITEK

FEATURE

- Self-Healing Property
- Dielectric: Metallized Polypropylene Film
- Winding: Non-Inductive Type
- Over Voltage Stress Withstanding
- Flammability Classification 94V-0
- UL/cUL Safety Approved: Certification No: E197475



PART NUMBERING SYSTEM

MEY 223 K 300V xxxx
(1) (2) (3) (4) (5)




| No | Item | Digit | Description | Reference |
|-----|----------------|-------|--------------------------------|--|
| (1) | Meritek Series | MEY | EMI Suppression Capacitors | Y2 Class Safety Film Capacitor |
| (2) | Capacitance | 223 | 223: 22000pF | First two digits: Significant, Third: Multiplier |
| (3) | Tolerance | K | K: $\pm 10\%$ | $\pm 5\%$ (J), $\pm 20\%$ (M) |
| (4) | Rated Voltage | 300V | 300V: 300VAC | at 50~60Hz |
| (5) | Internal Code | xxxx | Pitch or Internal control code | Internal Control or project reference |

SPECIFICATIONS

| Item | Characteristic | |
|------------------------------------|--|--|
| Operating Temperature Range | -40°C ~ +110°C | |
| Rated Voltage , Climate Category | 300VAC at 50~60Hz, | 40/110/56/B |
| Capacitance, Tolerance | 0.001 μ F ~ 1.0 μ F, | $\pm 5\%$ (J), $\pm 10\%$ (K), $\pm 20\%$ (M) |
| Dissipation Factor (tan δ) | $\leq 0.1\%$ | at 1KHz $\pm 2\%$, $\leq 1.0V_{RMS}$ |
| Insulation resistance | $\geq 15,000M\Omega$ | at 100V _{DC} , Change Time: 60s $\pm 5s$ |
| Withstanding Voltage | Between Terminals | Between Terminals and Case |
| | 2,000VAC for 2sec. or 4,000VDC for 2 sec. | 2*Ur+1.5KV _{AC} for 2~5s, Min 2KV _{AC} |

DIMENSION

| P (mm) | d (mm) | W, H, T (mm) |
|--------|--------|--------------------|
| 7.5 | 0.6 | See Table Attached |
| 10.0 | 0.6 | |
| 15.0 | 0.6 | |
| 22.5 | 0.8 | |
| 27.5 | 0.8 | |

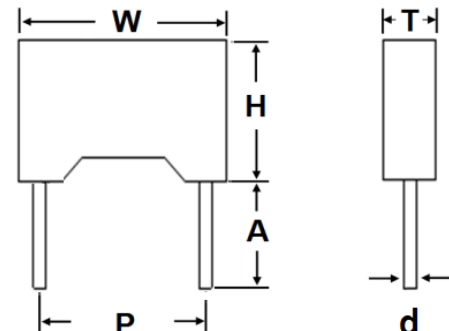

Note:

1. Standard lead length A: 15mm min.
2. Contact Meritek for other available options for lead forming or assembly

EMI Suppression Capacitors Y2 Class 300VAC

MEY-300V Series

MERITEK

ELECTRICAL SPECIFICATION – 300VAC

| Part Number | Cap Code | Cap | Tol | Volt | W | H | T | P | d | Safety |
|---------------|----------|------------|-------|--------------------|------|------|------|------|------|-------------|
| | | (μ F) | (%) | (V _{AC}) | (mm) | (mm) | (mm) | (mm) | (mm) | Compliance |
| MEY102□300V75 | 102 | 0.0010 | J,K,M | 300 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY102□300V10 | 102 | 0.0010 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY102□300V15 | 102 | 0.0010 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY152□300V75 | 152 | 0.0015 | J,K,M | 300 | 10.5 | 9.0 | 4.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY152□300V10 | 152 | 0.0015 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY152□300V15 | 152 | 0.0015 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY222□300V75 | 222 | 0.0022 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY222□300V10 | 222 | 0.0022 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY222□300V15 | 222 | 0.0022 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY272□300V75 | 272 | 0.0027 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY272□300V10 | 272 | 0.0027 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY272□300V15 | 272 | 0.0027 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY332□300V75 | 332 | 0.0033 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY332□300V10 | 332 | 0.0033 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY332□300V15 | 332 | 0.0033 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY392□300V75 | 392 | 0.0039 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY392□300V10 | 392 | 0.0039 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY392□300V15 | 392 | 0.0039 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY472□300V75 | 472 | 0.0047 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY472□300V10 | 472 | 0.0047 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY472□300V15 | 472 | 0.0047 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY562□300V75 | 562 | 0.0056 | J,K,M | 300 | 10.5 | 11.0 | 5.0 | 7.5 | 0.6 | UL,cUL,ENEC |
| MEY562□300V10 | 562 | 0.0056 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY562□300V15 | 562 | 0.0056 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY682□300V10 | 682 | 0.0068 | J,K,M | 300 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY682□300V15 | 682 | 0.0068 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY822□300V10 | 822 | 0.0082 | J,K,M | 300 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY822□300V15 | 822 | 0.0082 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY103□300V10 | 103 | 0.010 | J,K,M | 300 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY103□300V15 | 103 | 0.010 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY123□300V10 | 123 | 0.012 | J,K,M | 300 | 13.0 | 12.0 | 6.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY123□300V15 | 123 | 0.012 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY153□300V10 | 153 | 0.015 | J,K,M | 300 | 13.0 | 11.0 | 5.0 | 10.0 | 0.6 | UL,cUL,ENEC |
| MEY153□300V15 | 153 | 0.015 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY183□300V15 | 183 | 0.018 | J,K,M | 300 | 18.0 | 11.0 | 5.0 | 15.0 | 0.6 | UL,cUL,ENEC |

Note: 1. □: denotes tolerance code; 2. **: Contact Meritek for Part Number

EMI Suppression Capacitors Y2 Class 300VAC

MEY-300V Series

MERITEK

ELECTRICAL SPECIFICATION – 300VAC

| Part Number | Cap Code | Cap | Tol | Volt | W | H | T | P | d | Safety |
|-----------------|----------|------------|-------|--------------------|------|------|------|------|------|-------------|
| | | (μ F) | (%) | (V _{AC}) | (mm) | (mm) | (mm) | (mm) | (mm) | Compliance |
| MEY223□300V15 | 223 | 0.022 | J,K,M | 300 | 17.0 | 11.0 | 5.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY253□300V15 | 253 | 0.025 | J,K,M | 300 | 18.0 | 12.0 | 6.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY273□300V15** | 273 | 0.027 | J,K,M | 300 | 17.0 | 11.0 | 5.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY273□300V15** | 273 | 0.027 | J,K,M | 300 | 18.0 | 12.0 | 6.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY333□300V15 | 333 | 0.033 | J,K,M | 300 | 18.0 | 12.0 | 6.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY473□300V15 | 473 | 0.047 | J,K,M | 300 | 18.0 | 13.5 | 6.0 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY473□300V22 | 473 | 0.047 | J,K,M | 300 | 25.0 | 14.5 | 6.0 | 22.5 | 0.8 | UL,cUL,ENEC |
| MEY563□300V15 | 563 | 0.056 | J,K,M | 300 | 17.0 | 15.5 | 7.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY683□300V15 | 683 | 0.068 | J,K,M | 300 | 17.0 | 15.5 | 7.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY823□300V15 | 823 | 0.082 | J,K,M | 300 | 17.0 | 16.5 | 9.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY104□300V15 | 104 | 0.100 | J,K,M | 300 | 17.0 | 16.5 | 9.5 | 15.0 | 0.6 | UL,cUL,ENEC |
| MEY104□300V22 | 104 | 0.100 | J,K,M | 300 | 26.5 | 16.5 | 7.0 | 22.5 | 0.8 | UL,cUL,ENEC |
| MEY104□300V27 | 104 | 0.100 | J,K,M | 300 | 31.5 | 16.5 | 7.5 | 27.5 | 0.8 | UL,cUL,ENEC |

Note: 1. □: denotes tolerance code; 2. **: Contact Meritek for Part Number

RELIABILTY AND TEST CONDITIONS

| Item | Test Condition | Requirement |
|---|---|--|
| Capacitance | Measuring Frequency: $\pm 2\%$; Measuring Voltage: $\leq 1V_{rms}$. | Within the tolerance specified, at $+20\pm 5^{\circ}C$ |
| Withstand Voltage-Between Terminals | Apply 2,000VAC for 2 sec. or 4,000VDC | Within specified limits |
| Withstand Voltage - Between Terminals & Enclosure | Apply 2 times of rated voltage 1.5KV _{AC} for 2~5s; Min. 2KV _{AC} | Within specified limits |
| Dissipation Factor | Measuring Frequency: $\pm 2\%$; Measuring Voltage: $\leq 1V_{rms}$. | D.F. : $\leq 0.001(0.1\%)$ at 1KHz |
| Insulation resistance | Measured at 100V, 60 ± 5 Sec | IR $\geq 15,000M\Omega$ |
| Solderability | Soldering temperature: $+235\pm 5^{\circ}C$ Immersion duration: 2 ± 0.5 sec | More than 90% of circumferential surface of lead wire shall be covered with new solder |
| Tensile Terminal Strength | Apply 1.0Kg (10N) for 10 ± 1 sec to the terminal in the axial direction and acting in a direction away from the body. | Shall be no abnormality |
| Bending Strength | Apply 0.5Kg for 2 cycles. Each cycle includes: 90° once, return to its initial position for 2~3 sec. and then to the opposite direction once. | Shall be no abnormality |

EMI Suppression Capacitors Y2 Class 300VAC

MEY-300V Series

MERITEK

RELIABILTY AND TEST CONDITIONS

| Item | Test Condition | Requirement | | | | | | | | | | | | | | | | | |
|----------------------------------|--|--|-------|-------------|------|---|---------|-------|---|---------|-------|---|---------|-------|---|----------|-------|---|---------|
| Damp Heat | Temperature: +40°C ± 2°C, Relative Humidity: 90%~95% Time: 56days; After test, let rest for 1.5±0.5hr at ordinary condition before making measurements. | Appearance : No Visible Damage Withstand Voltage: Within specified limits ΔC/C: ≤ ±5% of the value before test DF: ≤ 0.002 (0.2%) Max at 1KHz IR: ≥ 50% of the rated value | | | | | | | | | | | | | | | | | |
| Dry Heat Resistance | Temperature: 110°C ± 2°C, Times: 16 +1/-0Hrs | | | | | | | | | | | | | | | | | | |
| Cold Resistance | Temperature: -40±3°C, Times: 2±1Hrs | | | | | | | | | | | | | | | | | | |
| Temperature Cycle | Test Temperature Cycle: Total 5 cycles. Each cycle includes <table border="1"> <thead> <tr> <th>Cycle</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+20±2°C</td> <td>3 min</td> </tr> <tr> <td>2</td> <td>-40±3°C</td> <td>30min</td> </tr> <tr> <td>3</td> <td>+20±2°C</td> <td>3 min</td> </tr> <tr> <td>4</td> <td>+110±2°C</td> <td>30min</td> </tr> <tr> <td>5</td> <td>+20±2°C</td> <td>3 min</td> </tr> </tbody> </table> After test, let rest for 1.5±0.5hr at ordinary condition before making measurements. | | Cycle | Temperature | Time | 1 | +20±2°C | 3 min | 2 | -40±3°C | 30min | 3 | +20±2°C | 3 min | 4 | +110±2°C | 30min | 5 | +20±2°C |
| Cycle | Temperature | Time | | | | | | | | | | | | | | | | | |
| 1 | +20±2°C | 3 min | | | | | | | | | | | | | | | | | |
| 2 | -40±3°C | 30min | | | | | | | | | | | | | | | | | |
| 3 | +20±2°C | 3 min | | | | | | | | | | | | | | | | | |
| 4 | +110±2°C | 30min | | | | | | | | | | | | | | | | | |
| 5 | +20±2°C | 3 min | | | | | | | | | | | | | | | | | |
| Vibration Resistance | Frequency change: 10~55~10Hz Vibration Distance: 1.5mm Test Direction: X, Y, Z Test Duration: 2+1/-0hrs each direction | Appearance : No mechanical Damage Connection: Shall be no short or open | | | | | | | | | | | | | | | | | |
| Soldering Heat Resistance | Preheat Temperature: 100~120°C Preheat Duration: 60sec max Temperature increase by 3°C/sec max Soldering Temperature: +260±5°C Immersion Duration: 5±1sec Immersion Depth: 4±0.8mm from roots After test, allow it stay alone for 1.5±0.5hrs at ordinary condition before making measurements | Appearance: No Visible Damage Withstand Voltage: Within specified limits ΔC/C: ≤ ±3% of the value before test DF: ≤ 0.002 (0.2%) Max at 1KHz IR: ≥ 50% of the rated value | | | | | | | | | | | | | | | | | |
| Endurance | Duration: 1,000 hours, Temperature: +110± 2°C Voltage: 1.25 times rated voltage. Once every hour the voltage increased to 1KVrms. For 0.1sec. The test voltage is applied to each capacitor individually through a Resistor of 47Ω±5%. | Appearance : No Visible Damage ΔC/C: ≤ ±10% of the value before test DF: ≤ 0.008 (0.8%) Max at 1KHz IR: ≥ 50% of the rated value | | | | | | | | | | | | | | | | | |
| Humidity Resistance | Test Temperature: -40±2°C Test Humidity: 87% to 93% R.H. Test Voltage: rated voltage Test Duration: 500 hours After test, allow it stay alone for 1.5±0.5hrs at ordinary condition before making measurements | Appearance: No Visible Damage Withstand Voltage: Within specified limits ΔC/C: ≤ ±5% of the value before test DF: ≤ 0.002 (0.2%) Max at 1KHz IR: ≥ 50% of the rated value | | | | | | | | | | | | | | | | | |

Notes:

1. Ambient Temp: 15°C to 35°C, Relative Humidity (R.H.): 45% to 75%, Air Pressure: 86kpa to 106kpa
2. Operating Temperature: -40~110°C
3. Storage needs to be kept indoors at -10~+40°C and relative humidity of under 75% without any sudden temperature changes, direct sunlight and corrosive gas around
4. Do not apply and exceeding vibration, shock (dropping) and pressure

*Specifications subject to change without notice.