


Transient Voltage Suppressors P600 Package

20KPA Series

MERITEK

FEATURE

- Peak Pulse Power Dissipation: 20000W
- Fast response time. I_R less than $2\mu A$ above 40V. Duty cycle: 0.05%
- Glass passivated junction
- Excellent clamping capability, Low incremental surge resistance
- High Temperature soldering guaranteed: $265^{\circ}C$, 10seconds
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- UL Flammability Classification Rating 94V-0
- UL safety approved: certification No: E223045

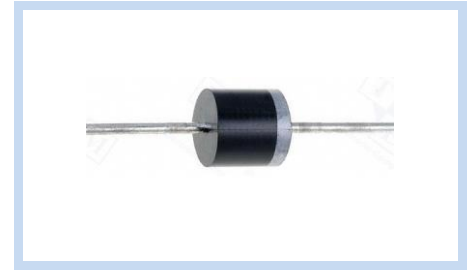

MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation on 10/1000 μs waveform. (Note 1, Fig. 1)	P_{PPM}	Minimum 20000	Watts
Peak Pulse Current on 10/1000 μs waveform. (Note 1, Fig. 3)	I_{PPM}	See Table	Amps
Steady State Power Dissipation at $T_L = 75^{\circ}C$, Lead length .375" (9.5mm). (Fig. 5)	$P_{M(AV)}$	8.0	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	400	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +175	$^{\circ}C$


Ratings at $25^{\circ}C$ ambient temperature unless otherwise specified.

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^{\circ}C$ per Fig. 2.

2. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minute maximum.

DIMENSIONS

Item	P600 (mm)	
	Min.	Max.
L	25.40	-
T	8.6	9.10
d	8.60	9.10
S	1.22	1.32

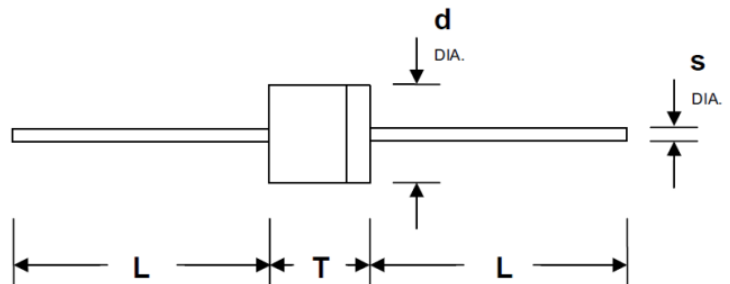

SPECIFICATIONS

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage Min. @ I_T	Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_{RWM}
Uni-Polar	Bi-Polar	$V_{RWM}(V)$	$V_{BR MIN.}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
20KPA20A	20KPA20CA	20.0	22.34	50	36.8	548.9	5000
20KPA24A	20KPA24CA	24.0	26.81	50	41.2	490.3	5000
20KPA26A	20KPA26CA	26.0	29.04	50	44.7	451.9	2000
20KPA28A	20KPA28CA	28.0	31.28	50	48.0	420.8	1000
20KPA30A	20KPA30CA	30.0	33.51	5	51.5	392.2	250
20KPA32A	20KPA32CA	32.0	35.74	5	54.3	372.0	150
20KPA34A	20KPA34CA	34.0	38.00	5	57.5	351.3	50
20KPA36A	20KPA36CA	36.0	40.20	5	61.5	328.5	20
20KPA40A	20KPA40CA	40.0	44.70	5	67.8	297.9	15
20KPA44A	20KPA44CA	44.0	49.10	5	72.7	277.9	2

Transient Voltage Suppressors P600 Package

20KPA Series

MERITEK

SPECIFICATIONS (CONTINUED)

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage Min. @ I_T	Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_{RWM}
Uni-Polar	Bi-Polar	$V_{RWM}(V)$	$V_{BR MIN.}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
20KPA48A	20KPA48CA	48.0	53.60	5	79.4	254.4	2
20KPA52A	20KPA52CA	52.0	58.10	5	85.8	235.4	2
20KPA56A	20KPA56CA	56.0	62.60	5	92.6	218.1	2
20KPA60A	20KPA60CA	60.0	67.00	5	97.6	207.0	2
20KPA64A	20KPA64CA	64.0	71.50	5	104.0	194.2	2
20KPA68A	20KPA68CA	68.0	76.00	5	110.0	183.6	2
20KPA72A	20KPA72CA	72.0	80.40	5	116.0	174.1	2
20KPA80A	20KPA80CA	80.0	89.40	5	130.0	155.4	2
20KPA88A	20KPA88CA	88.0	98.30	5	142.0	142.3	2
20KPA96A	20KPA96CA	96.0	107.20	5	155.0	130.3	2
20KPA104A	20KPA104CA	104.0	116.20	5	168.0	120.2	2
20KPA112A	20KPA112CA	112.0	125.10	5	182.0	111.0	2
20KPA120A	20KPA120CA	120.0	134.00	5	194.0	104.1	2
20KPA132A	20KPA132CA	132.0	147.40	5	213.0	94.8	2
20KPA144A	20KPA144CA	144.0	160.80	5	232.0	87.1	2
20KPA160A	20KPA160CA	160.0	178.70	5	258.0	78.3	2
20KPA172A	20KPA172CA	172.0	192.10	5	277.0	72.9	2
20KPA180A	20KPA180CA	180.0	201.10	5	291.0	69.4	2
20KPA192A	20KPA192CA	192.0	214.50	5	309.0	65.4	2
20KPA204A	20KPA204CA	204.0	227.90	5	329.0	61.4	2
20KPA216A	20KPA216CA	216.0	241.30	5	348.0	58.0	2
20KPA232A	20KPA232CA	232.0	259.10	5	374.0	54.0	2
20KPA240A	20KPA240CA	240.0	268.10	5	387.0	52.2	2
20KPA256A	20KPA256CA	256.0	286.00	5	412.0	49.0	2
20KPA280A	20KPA280CA	280.0	312.80	5	451.0	44.8	2
20KPA300A	20KPA300CA	300.0	335.10	5	483.0	41.8	2


Transient Voltage Suppressors P600 Package

20KPA Series


MERITEK

CHARACTERISTIC CURVES


Peak Pulse Power Rating Curve

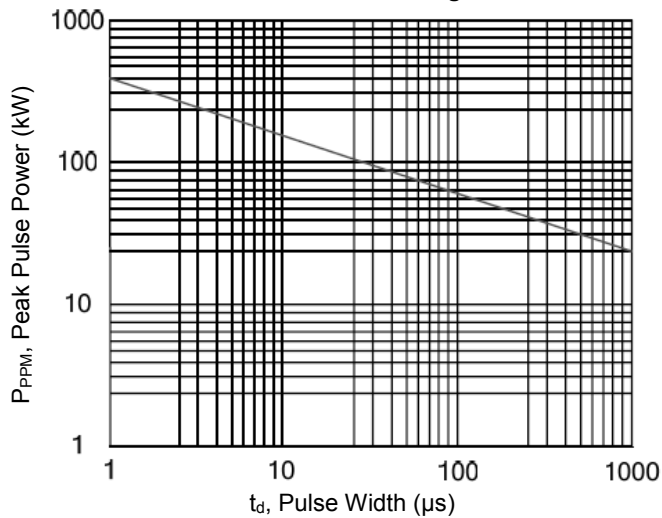


Pulse Derating Curve

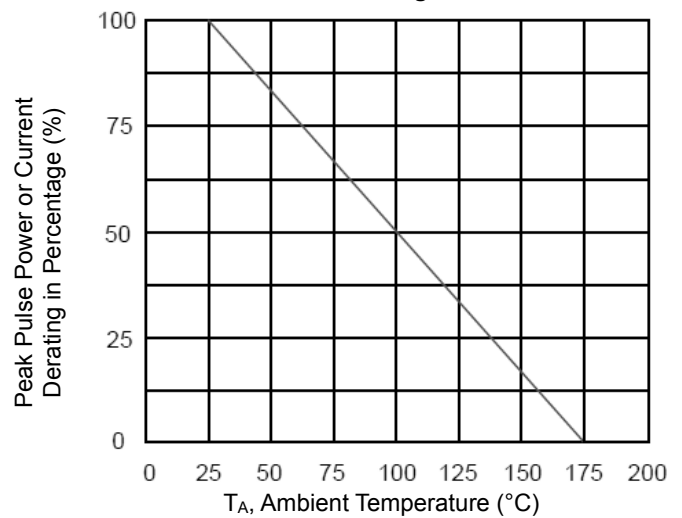


Pulse Waveform

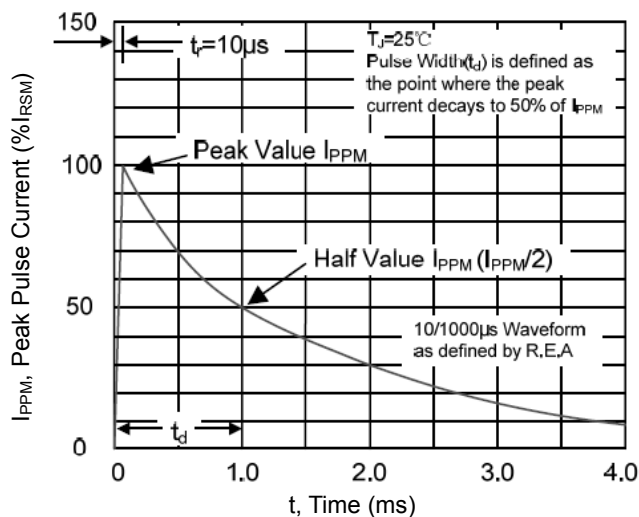


Typical Junction Capacitance

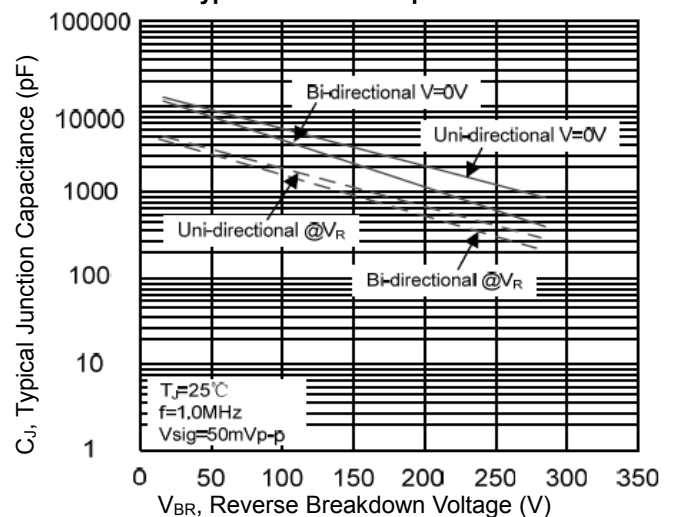

Steady State Power Dissipation Derating Curve

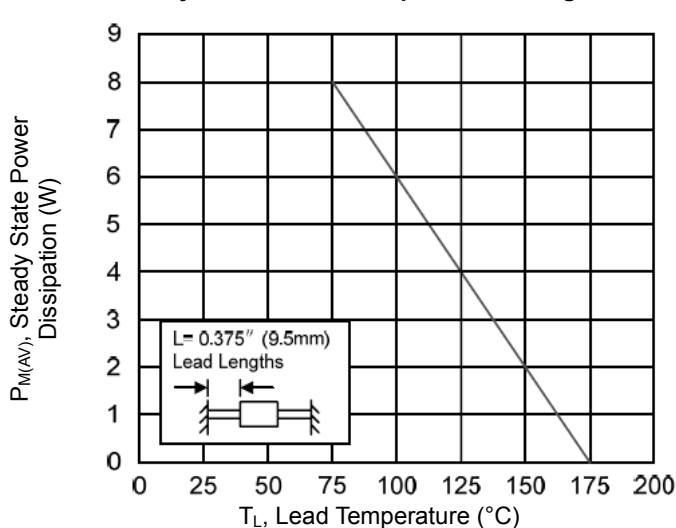

Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

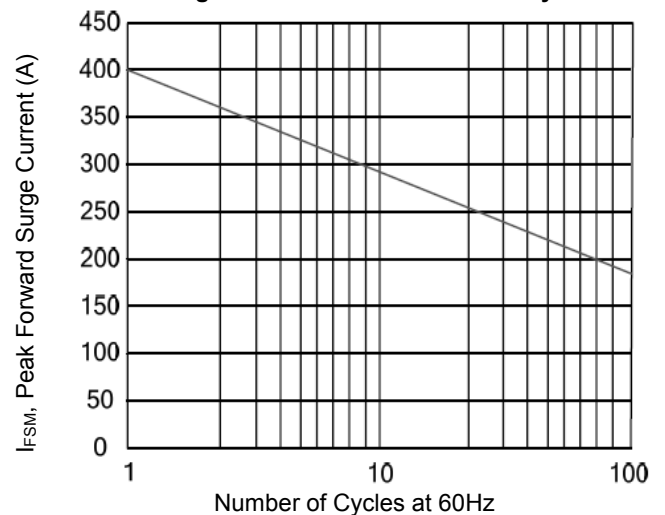




Transient Voltage Suppressors P600 Package

20KPA Series

MERITEK


PACKAGING SPECIFICATION

Tape	
Symbol	Dimension(mm)
A	10.0±0.5
B	53.0±1.0
Z	1.2Max.
T	6.0±0.4
E	0.8Max.
L1-L2	1.0Max.
Box	
Symbol	Dimension(mm)
L	250.0±5.0
W	75.0±5.0
H	114.0±5.0
Quantity: 300PCS	
Reel	
Symbol	Dimension(mm)
D	330.0±3.0
D0	16.4±2.0
D1	86.0±2.0
W1	76.0±3.0
Quantity: 800PCS	

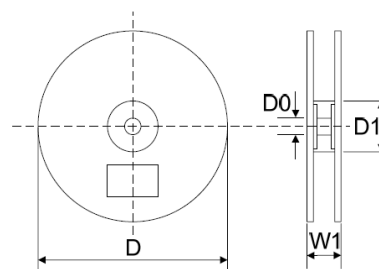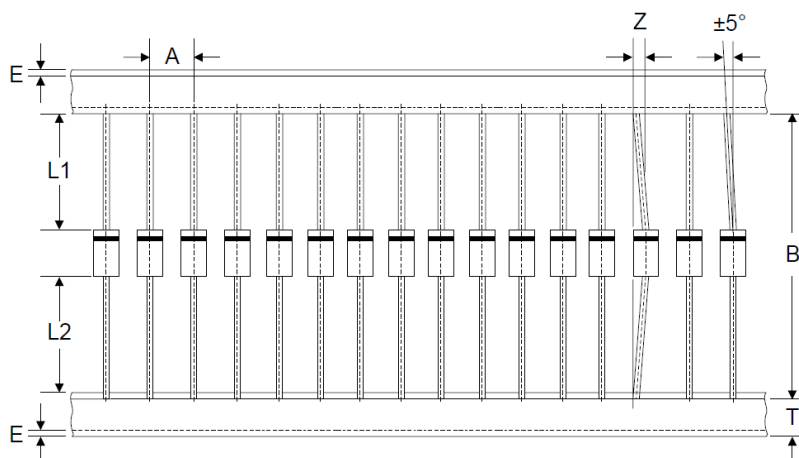

WAVE SOLDERING RECOMMENDATION

Item	Conditions
Peak Temperature	265°C
Dipping Time	10 Seconds
Soldering	1 time

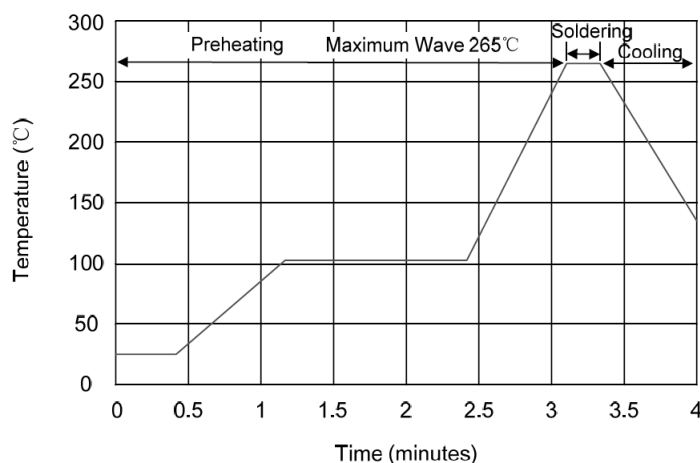

*Specifications subject to change without notice.