

ESD Suppressor 12V Unidirectional DFN1006

ME121U25D02

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 30\text{KV}$ (Air) $\pm 25\text{KV}$ (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- IEC 61000-4-5 Lightning: 2.5A (8/20 μs)
- ESD Protection for one Unidirectional Channel
- Low Leakage Current
- Low Clamping Voltage
- Solid-State Silicon-Avalanche Technology



APPLICATION

- Cellular Handsets and Accessories
- Small Panel Modules
- PDA's
- Portable Devices
- Peripherals



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage per IEC61000-4-2 (Contact discharge)	V_{ESD}	± 25	KV
ESD Voltage per IEC61000-4-2 (Air discharge)		± 30	KV
Typical Thermal Resistance	$R_{\theta JA}$	430	$^{\circ}\text{C}/\text{W}$
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	12	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	12.5	--	15.5	V
Reverse Leakage Current	$V_R=12\text{V}$	I_R	--	--	1	μA
Clamping Voltage	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$	V_C	--	--	20	V
	$I_{PP}=2.5\text{A}, t_p=8/20\mu\text{s}$		--	--	25	
Clamping Voltage TLP	$I_{PP}=8\text{A}, t_p=100\text{ns}$	V_C	--	17.4	--	V
	$I_{PP}=16\text{A}, t_p=100\text{ns}$		--	20.5	--	
Dynamic Resistance	$t_p=100\text{ns}$	R_{DYN}	--	0.39	--	Ω
Off State Junction Capacitance	$V_{dc}=0, f=1\text{MHz}$	C_J	--	--	20	pF

Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified
2. Mounted on a FR4 PCB, Single Sided copper, mini pad
3. Transmission Line Pulse (TLP) test condition: $Z_0=50\Omega, t_p=100\text{ns}$


ESD Suppressor 12V Unidirectional DFN1006

ME121U25D02


MERITEK

CHARACTERISTIC CURVES


Typical Peak Clamping Voltage

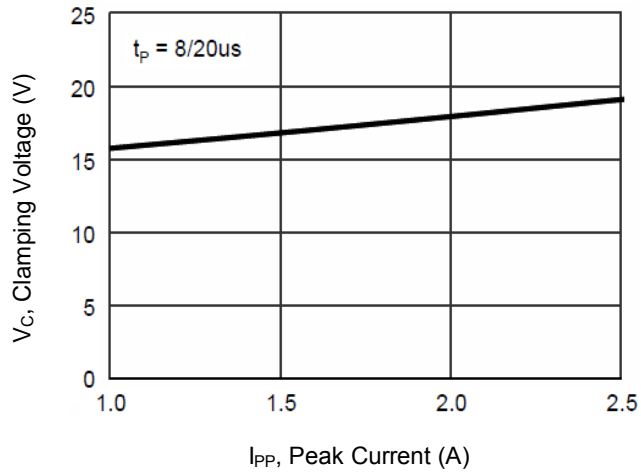


Pulse Waveform

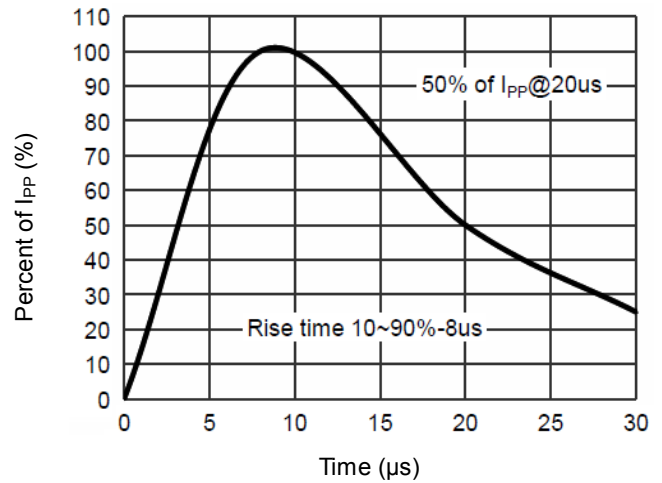

Typical Junction Capacitance

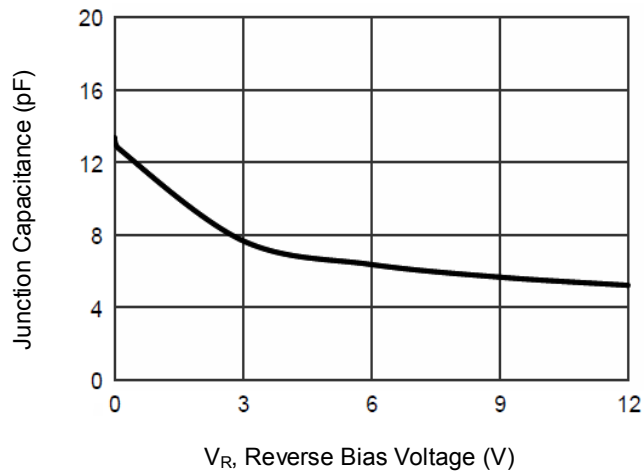

TLP Measurement

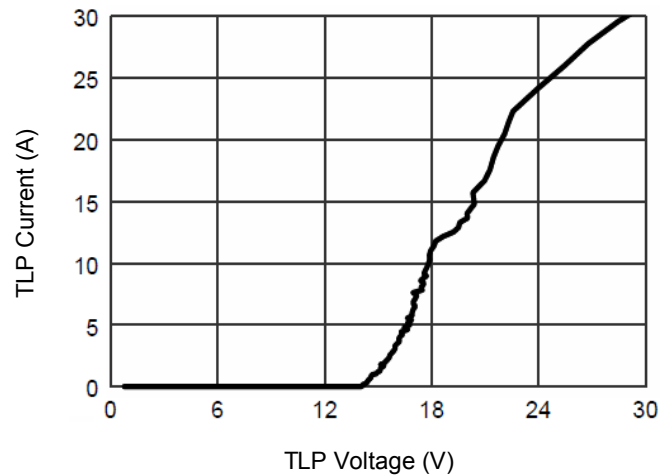


ESD Suppressor 12V Unidirectional DFN1006

ME121U25D02

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.45	0.55
A1	-	0.05
b2	0.45	0.55
D	0.95	1.05
E	0.55	0.65
z	0.10	0.10
L1	0.20	0.30
L2	0.20	0.30
L3	0.40	0.40
C	0.70	0.70
G1	0.30	0.30
X	0.40	0.40
X1	1.10	1.10
Y1	0.60	0.60

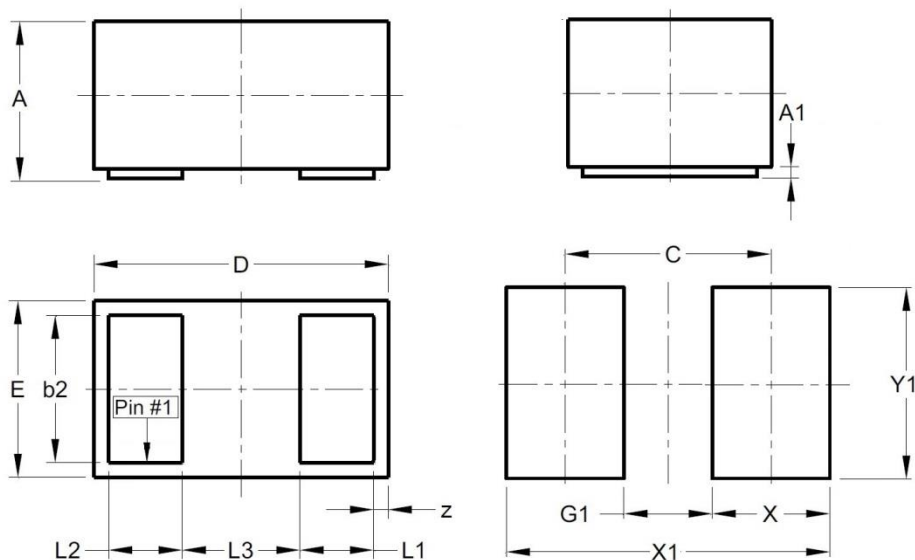

*Specifications subject to change without notice.