

ESD Suppressor 15V Bidirectional DFN1608

ME151B25D03

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 15\text{KV}$ (Air) $\pm 8\text{KV}$ (Contact)
- ESD Protection for one Bidirectional Channel
- Low Capacitance
- Low Clamping Voltage



APPLICATION

- USB 2.0 and USB 3.0
- High Definition Multi-Media Interface (HDMI)
- Display Port Interface
- SATA and eSATA Interface
- Desktops and Notebooks



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	V_{ESD}	± 8	KV
ESD Voltage (Air discharge)		± 15	
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	15	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	16.7	--	--	V
Reverse Leakage Current	$V_R=15\text{V}$	I_R	--	--	0.5	μA
Clamping Voltage	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$	V_C	--	--	25	V
	$I_{PP}=10\text{A}, t_p=8/20\mu\text{s}$		--	--	50	
Off State Junction Capacitance	$V_{dc}=0, f=1\text{MHz}$	C_J	--	20	--	pF

Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified


ESD Suppressor 15V Bidirectional DFN1608

ME151B25D03


MERITEK

CHARACTERISTIC CURVES


Power Derating Curve

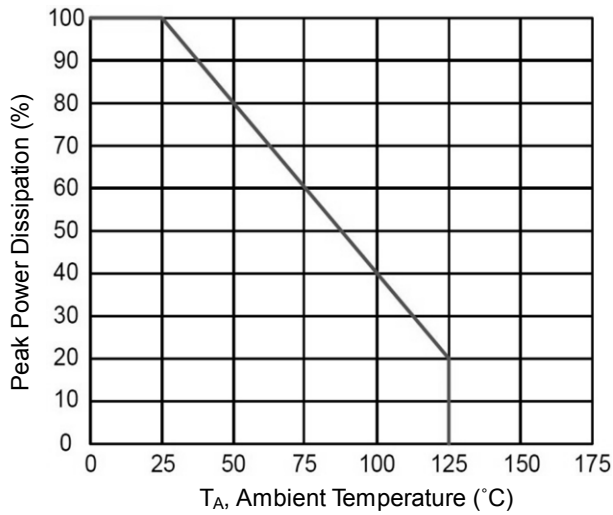

Pulse Waveform

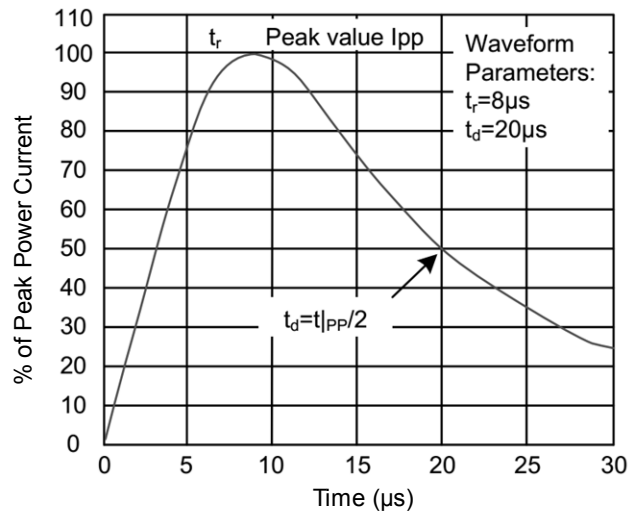

Clamping Voltage vs. Peak Pulse Current

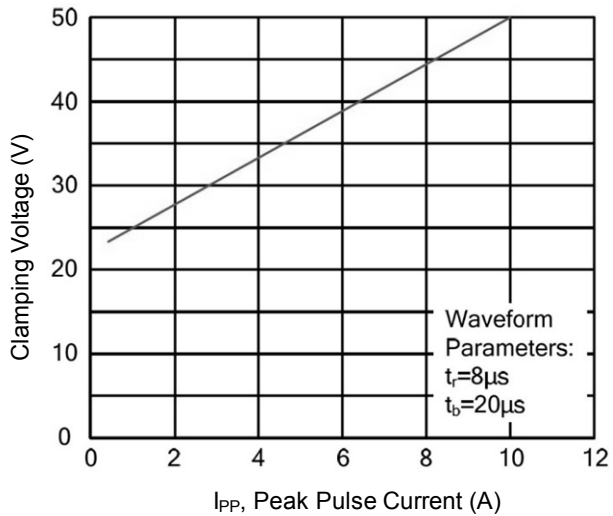


ESD Suppressor 15V Bidirectional DFN1608

ME151B25D03

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.45	0.65
A1	0.04	0.04
b	0.67	0.75
D	0.75	0.85
E	1.55	1.65
L	0.72	0.80
L1	0.32	0.50
X	0.80	0.80
Y	0.65	0.65
Y1	1.05	1.05
Y2	1.90	1.90

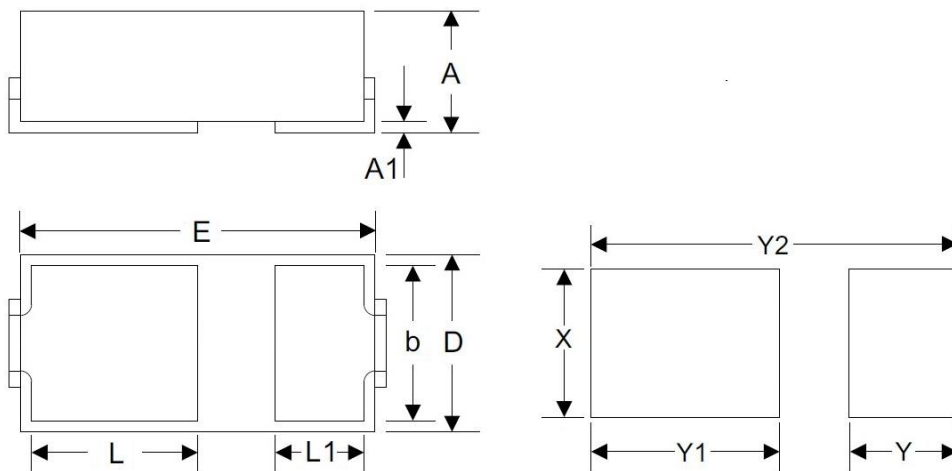

*Specifications subject to change without notice.