

# ESD Suppressor 15V 2-Unidirectional SOT-143

ME152U30S143

MERITEK


## FEATURE

- IEC 61000-4-2 ESD:  $\pm 20\text{KV}$  (Air)  $\pm 20\text{KV}$  (Contact)
- ESD Protection for two Unidirectional Channels
- Low Leakage Current and Clamping Voltage
- Low Capacitance
- Solid-State Silicon-Avalanche Technology



## APPLICATION

- USB Power And Data Line Protection
- Video Line Protection
- LAN/WAN Device
- Microcontroller Input Protection
- Portable Electronics



## MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	$V_{ESD}$	$\pm 20$	KV
ESD Voltage (Air discharge)		$\pm 20$	
Peak Pulse Current ( $t_p=8/20\mu\text{s}$ )	$I_{PP}$	2	A
Operating & Storage Temperature Range	$T_J, T_{STG}$	$-55\sim+150$	$^{\circ}\text{C}$

## ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	$V_{RWM}$	--	--	15	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	$V_{BR}$	16.7	--	--	V
Reverse Leakage Current	$V_R=15\text{V}$	$I_R$	--	--	1	$\mu\text{A}$
Clamping Voltage	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$	$V_C$	--	--	30	V
	$I_{PP}=2\text{A}, t_p=8/20\mu\text{s}$		--	--	35	
Off State Junction Capacitance	$V_{dc}=0, f=1\text{MHz}$ , Between I/O pins and GND	$C_J$	--	0.8	1	pF

Notes:

1.  $T_J=25^{\circ}\text{C}$  unless otherwise specified





# ESD Suppressor 15V 2-Unidirectional SOT-143

ME152U30S143

MERITEK

## DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A1	-	0.13
A2	-	1.14
A3	-	1.27
b	0.36	0.50
b2	0.76	0.93
C	0.08	0.15
D	2.79	3.04
e	1.90	1.90
e1	1.70	1.70
E	-	2.50
E1	1.19	1.40
L	0.15	-
Y	2.00	2.00
Y1	1.30	1.30
Y2	0.70	0.70
Y3	2.70	2.70
X	0.60	0.60
X1	2.50	2.50
X2	1.00	1.00

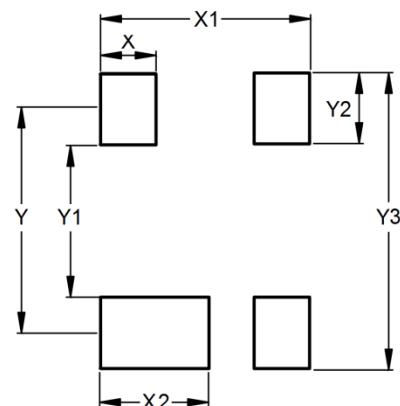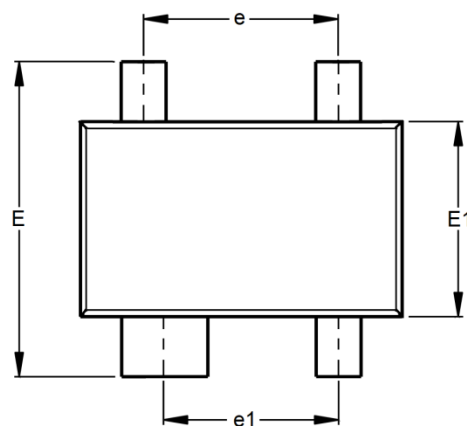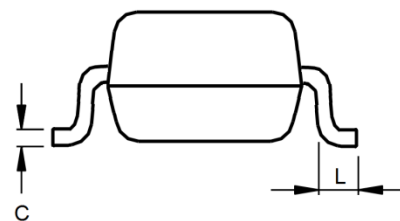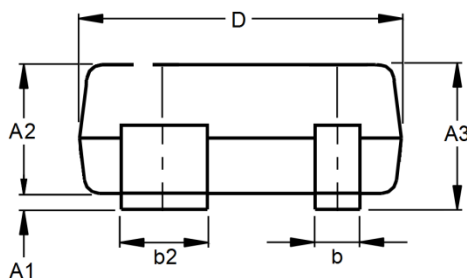


# ESD Suppressor 15V 2-Unidirectional SOT-143

ME152U30S143


MERITEK

## ESD PROTECTION STANDARDS

### IEC61000-4-2

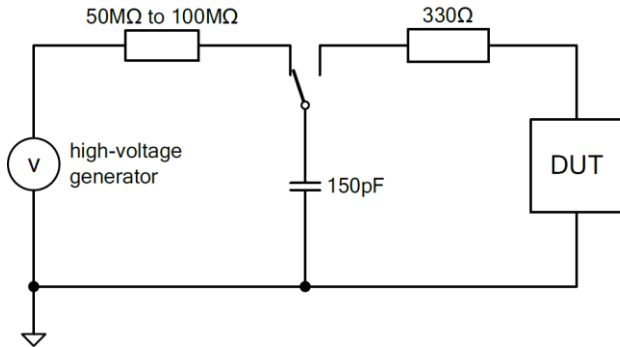


Test Circuit according to IEC61000-4-2

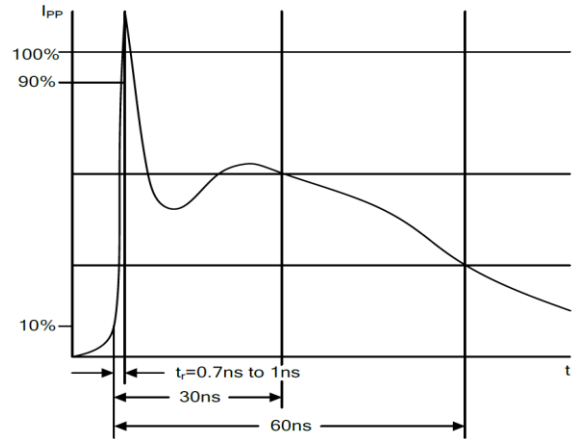


ESD Surge according to IEC61000-4-2

### Human Body Model (HBM, 883E method 3015.7)

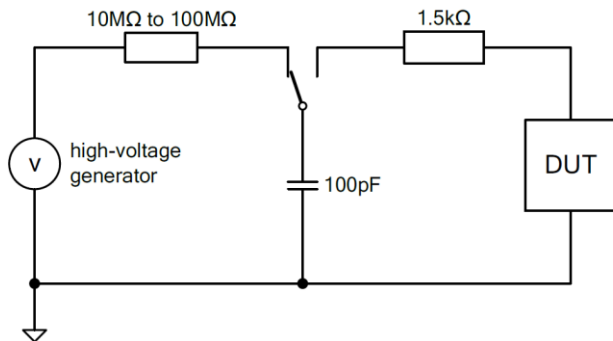

Test Circuit according to MIL-883E method 3015.7

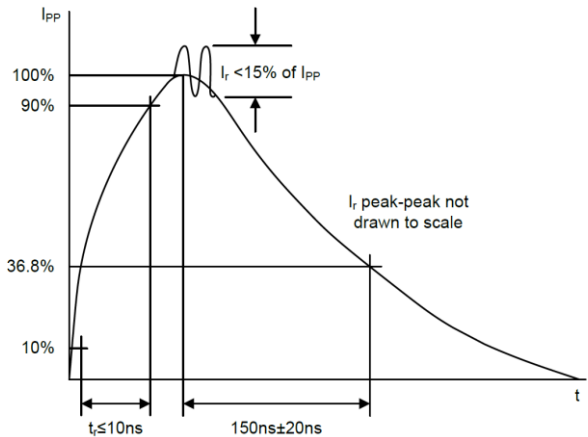

ESD Surge according to MIL-883E method 3015.7

\*Specifications subject to change without notice.