


ESD Suppressor 2.8V 4-Bidirectional SOIC-08

ME2V84B8V5S08

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 30\text{KV}$ (Air) $\pm 30\text{KV}$ (Contact)
- ESD Protection for four Bidirectional Channels
- Low Leakage Current
- Low Operating and Clamping Voltage
- Solid-State Silicon-Avalanche Technology

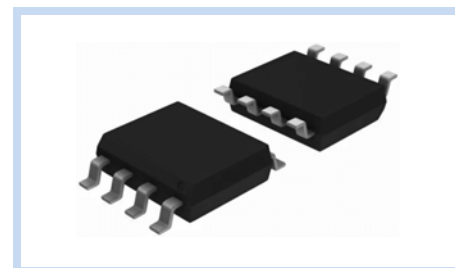

APPLICATION

- 10/100/1000 Ethernet
- WAN/LAN Equipment
- High Current Switching Systems
- Desktops, Servers, and Notebooks
- Instrumentation
- Base Stations



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	V_{ESD}	± 30	KV
ESD Voltage (Air discharge)		± 30	
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	24	A
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	2.8	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	3	--	--	V
Reverse Leakage Current	$V_R=2.8\text{V}$, Each I/O Pin	I_R	--	--	5	μA
Clamping Voltage	$I_{PP}=5\text{A}$, $t_p=8/20\mu s$	V_C	--	--	8.5	V
Off State Junction Capacitance	$V_{dc}=0$, $f=1\text{MHz}$, Between I/O pins and GND	C_J	--	--	3	pF
	$V_{dc}=0$, $f=1\text{MHz}$, Line to Line, Two I/O pins connected on each line		--	--	6	

Notes:

1. $T_A=25^{\circ}\text{C}$ unless otherwise specified.

2. Ratings with two pins connected together per the recommended configuration

(ie pin 1 connected to pin 8, pin 2 connected to pin 7, pin 3 connected to pin 6, pin 4 connected to pin 5).


ESD Suppressor 2.8V 4-Bidirectional SOIC-08

ME2V84B8V5S08


MERITEK

CHARACTERISTIC CURVES


Derating Curve

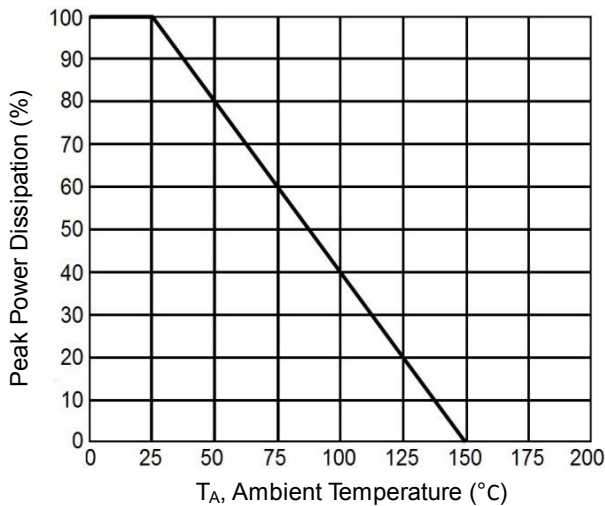


Pulse Waveforms

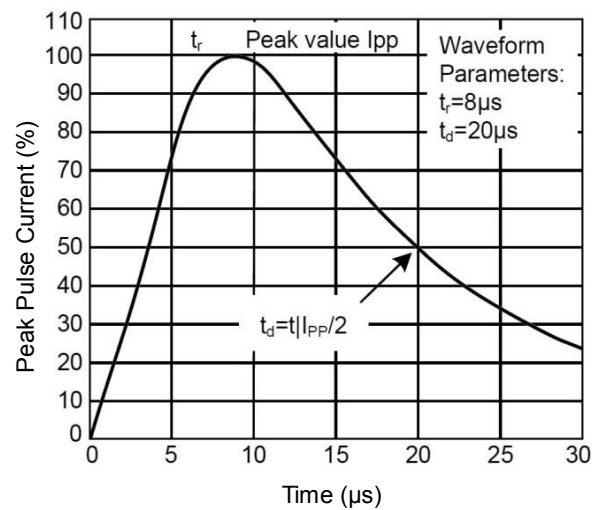


Non-Repetitive Peak Pulse vs. Pulse Time

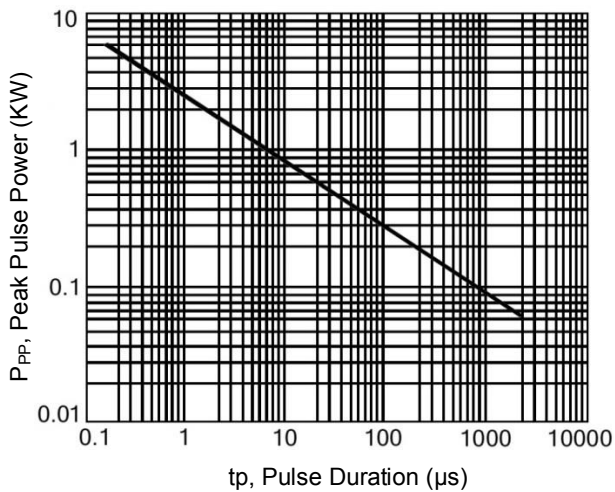

Capacitance vs. Reverse Voltage

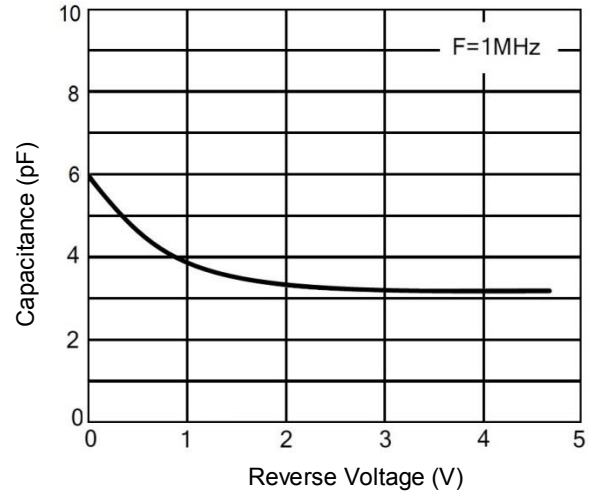

Clamping Voltage vs Peak Pulse Current

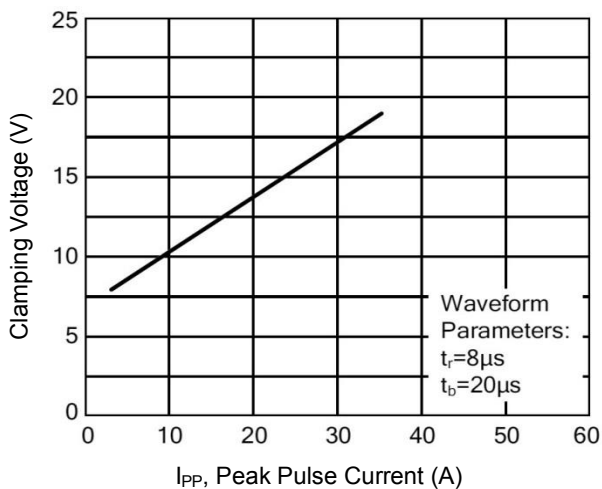



ESD Suppressor 2.8V 4-Bidirectional SOIC-08

ME2V84B8V5S08

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	4.80	5.00
B	5.80	6.20
C	3.80	4.00
D	1.27	1.27
E	0.33	0.51
F	0.40	1.27
G	0.19	0.25
H	1.35	1.75
H1	0.10	0.25
H2	1.45	1.45
X	0.73	0.73
X1	1.27	1.27
Y	1.20	1.20
Y1	6.60	6.60

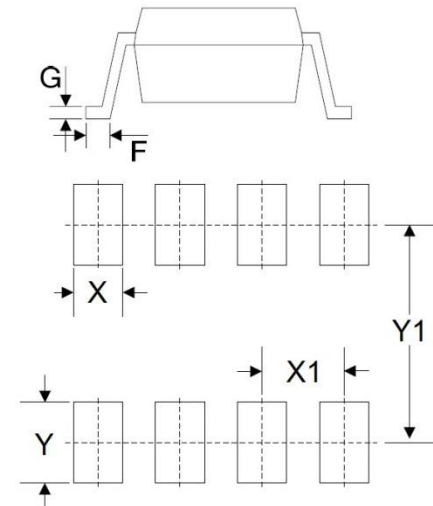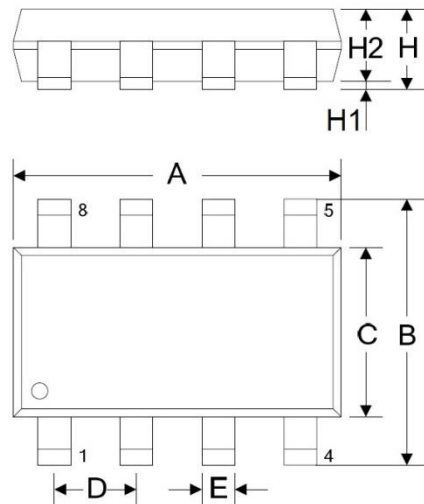

*Specifications subject to change without notice.