

ESD Suppressor 3.3V Bidirectional DFN1006

ME3V31B6D0210

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 30\text{KV}$ (Air) $\pm 30\text{KV}$ (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- IEC 61000-4-5 Lightning: 5A (8/20 μs)
- ESD Protection for one Bidirectional Channel
- Ultra Low Capacitance
- Low Clamping Voltage
- Low Leakage Current



APPLICATION

- Mobile Phones
- Hand Held Portable Applications
- Computer Interfaces Protection
- Microprocessors Protection
- Serial and Parallel Ports Protections



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage per IEC61000-4-2 (Contact discharge)	V_{ESD}	± 30	KV
ESD Voltage per IEC61000-4-2 (Air discharge)		± 30	KV
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	3.3	V
Punch Through Voltage	$V_{\text{PT}}=2\mu\text{A}$	V_{PT}	3.5	--	--	V
Snap Break Voltage	$V_{\text{SB}}=50\text{mA}$	V_{SB}	2.8	--	--	V
Reverse Leakage Current	$V_{\text{R}}=3.3\text{V}$	I_{R}	--	--	0.5	μA
Clamping Voltage	$I_{\text{PP}}=1\text{A}, t_{\text{p}}=8/20\mu\text{s}$	V_{C}	--	--	6	V
	$I_{\text{PP}}=5\text{A}, t_{\text{p}}=8/20\mu\text{s}$		--	--	8	
Clamping Voltage TLP	$I_{\text{PP}}=8\text{A}, t_{\text{p}}=100\text{ns}$	V_{C}	--	7	--	V
	$I_{\text{PP}}=16\text{A}, t_{\text{p}}=100\text{ns}$		--	8.5	--	
Dynamic Resistance	$t_{\text{p}}=100\text{ns}$	R_{DYN}	--	0.19	--	Ω
Off State Junction Capacitance	$V_{\text{dc}}=0, f=1\text{MHz}$	C_{J}	--	--	10	pF

Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified

2. Transmission Line Pulse (TLP) test condition: $Z_0=50\Omega, t_{\text{p}}=100\text{ns}$


ESD Suppressor 3.3V Bidirectional DFN1006

ME3V31B6D0210


MERITEK

CHARACTERISTIC CURVES


Typical Peak Clamping Voltage

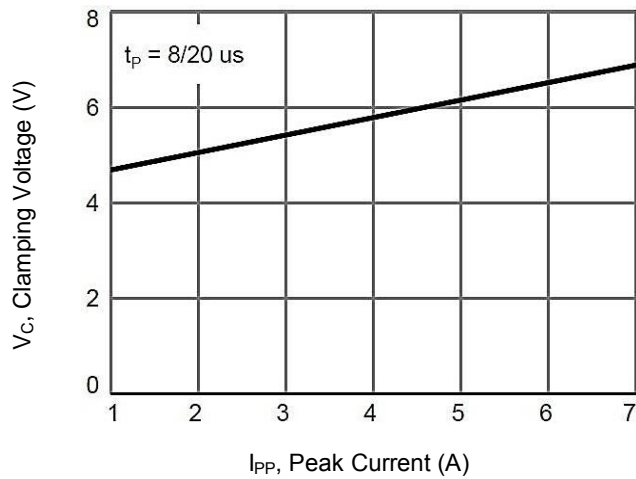


Pulse Waveform

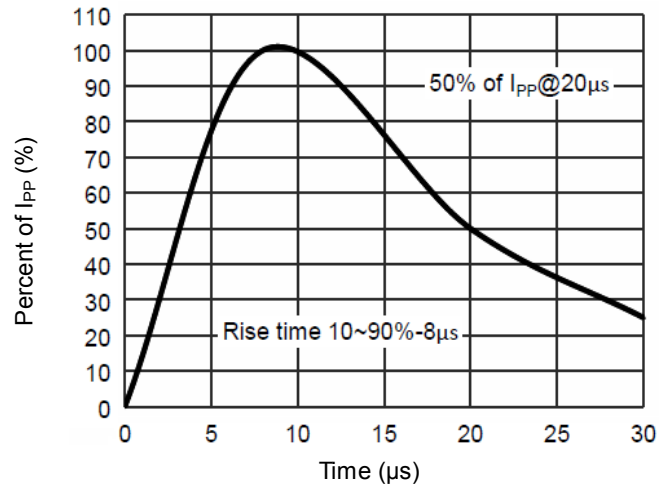

Typical Junction Capacitance

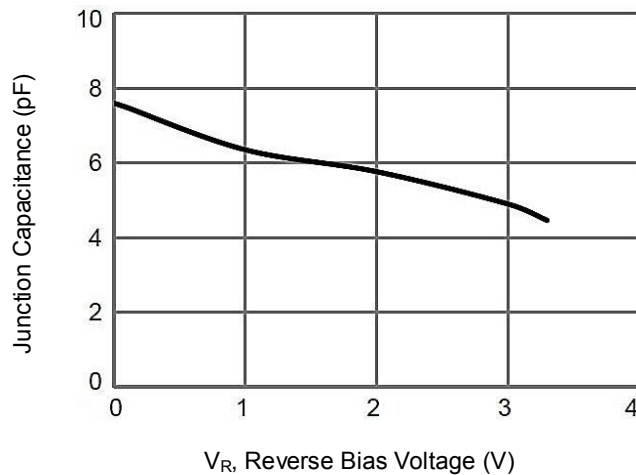

TLP Measurement

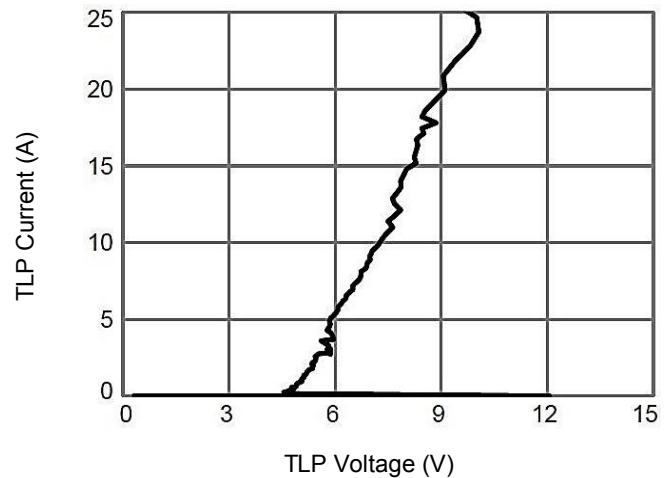


ESD Suppressor 3.3V Bidirectional DFN1006

ME3V31B6D0210

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.45	0.55
A1	-	0.05
b2	0.45	0.55
D	0.95	1.05
E	0.55	0.65
z	0.10	0.10
L1	0.20	0.30
L2	0.20	0.30
L3	0.40	0.40
C	0.70	0.70
G1	0.30	0.30
X	0.40	0.40
X1	1.10	1.10
Y1	0.60	0.60

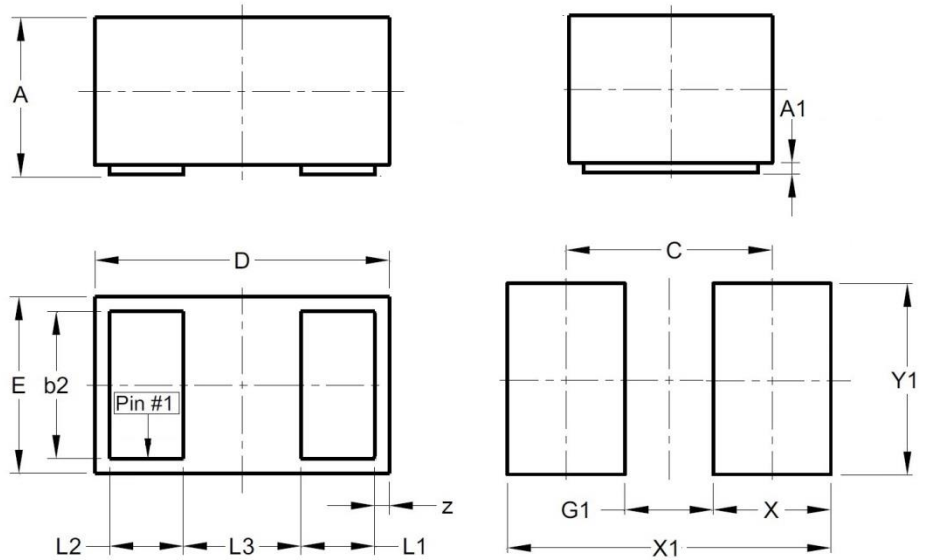

*Specifications subject to change without notice.