

ESD Suppressor 5V Bidirectional DFN0603

ME51B10D0112

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 15\text{KV}$ (Air) $\pm 8\text{KV}$ (Contact)
- ESD Protection for one Bidirectional Channel
- Low Leakage Current
- Low Clamping Voltage
- Solid-State Silicon-Avalanche Technology



APPLICATION

- Mobile Phones
- Hand Held Portable Applications
- Computer Interfaces Protection
- Microprocessors Protection
- Serial and Parallel Ports Protection



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	V_{ESD}	± 8	KV
ESD Voltage (Air discharge)		± 15	
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	1	A
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	5	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	5.8	--	--	V
Reverse Leakage Current	$V_R=5\text{V}$	I_R	--	--	1	μA
Clamping Voltage	$I_{PP}=1\text{A}, t_p=8/20\mu s$	V_C	--	--	10	V
Off State Junction Capacitance	$V_{dc}=0, f=1\text{MHz}$	C_J	--	12	--	pF

Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified


ESD Suppressor 5V Bidirectional DFN0603

ME51B10D0112


MERITEK

CHARACTERISTIC CURVES


Power Derating Curve

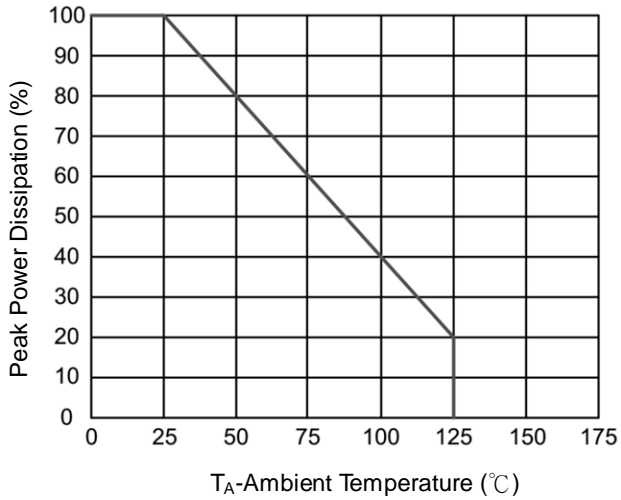

Pulse Waveforms

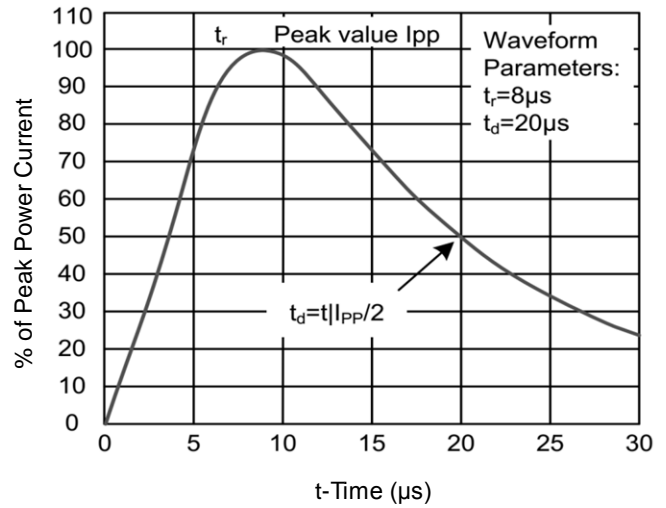

Clamping Voltage vs. Peak Pulse Current

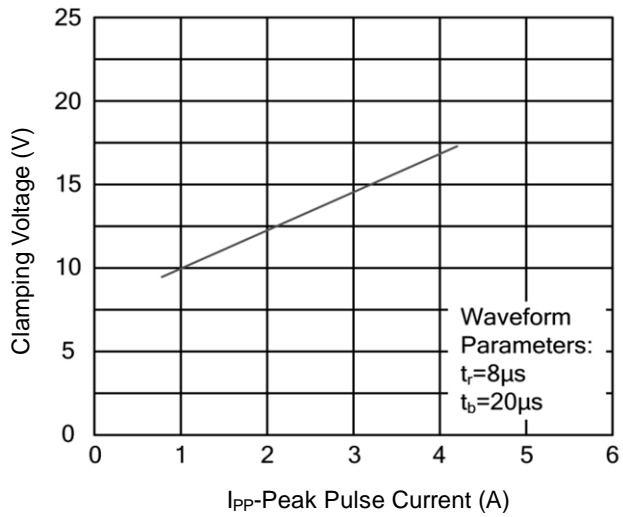


ESD Suppressor 5V Bidirectional DFN0603

ME51B10D0112

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.24	0.30
A1	-	0.01
b2	0.22	0.28
D	0.57	0.63
E	0.27	0.33
z	0.25	0.25
L1	0.12	0.18
L2	0.12	0.18
L3	-	-
C	0.47	0.47
G1	0.19	0.19
X	0.28	0.28
X1	0.75	0.75
Y1	0.30	0.30

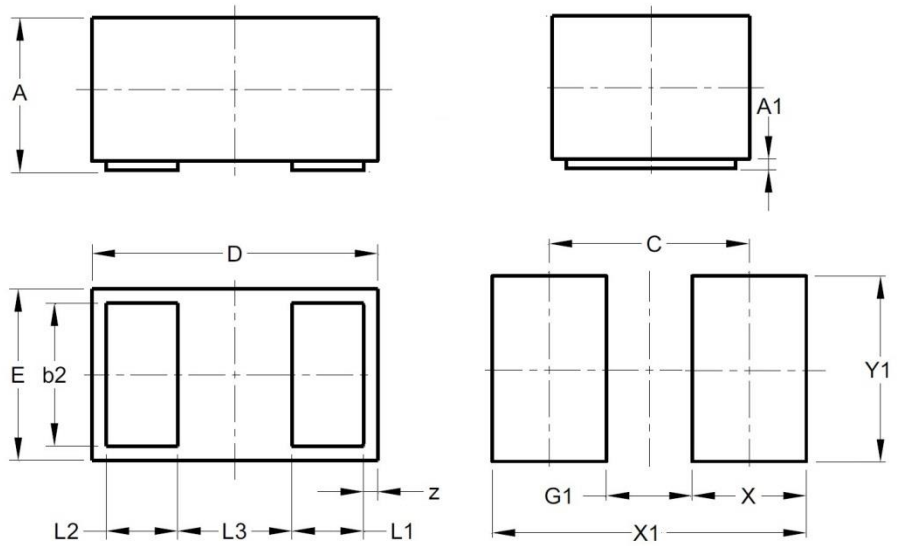

*Specifications subject to change without notice.