

ESD Suppressor 5V 2-Unidirectional DFN1006-3

ME52U10D023P35

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 20\text{KV}$ (Air) $\pm 15\text{KV}$ (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- IEC 61000-4-5 Lightning: 4A (8/20 μs)
- ESD Protection for two Unidirectional Channels
- Low Capacitance
- Low Clamping Voltage
- Solid-State Silicon-Avalanche Technology



APPLICATION

- USB 3.0 Data Lines Protection
- Data and I/O Lines Protection
- Video Lines Protection
- Hand Held Portable Devices
- Destops and Notebooks



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage per IEC61000-4-2 (Contact discharge)	V_{ESD}	± 15	KV
ESD Voltage per IEC61000-4-2 (Air discharge)		± 20	KV
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	5	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	5.5	--	--	V
Reverse Leakage Current	$V_R=5\text{V}$	I_R	--	--	50	nA
Clamping Voltage	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$	V_C	--	--	10	V
	$I_{PP}=4\text{A}, t_p=8/20\mu\text{s}$		--	--	15	
Clamping Voltage TLP	$I_{PP}=8\text{A}, t_p=100\text{ns}$	V_C	--	16	--	V
	$I_{PP}=16\text{A}, t_p=100\text{ns}$		--	23.5	--	
Dynamic Resistance	$t_p=100\text{ns}$	R_{DYN}	--	0.94	--	Ω
Off State Junction Capacitance	$V_{dc}=2.5, f=1\text{MHz}$, Any I/O pins to GND	C_J	--	0.30	0.35	pF
	$V_{dc}=2.5, f=1\text{MHz}$, Between any I/O pins		--	0.20	--	


Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified


2. Transmission Line Pulse (TLP) test condition: $Z_0=50\Omega, t_p=100\text{ns}$

CHARACTERISTIC CURVES


Typical Junction Capacitance

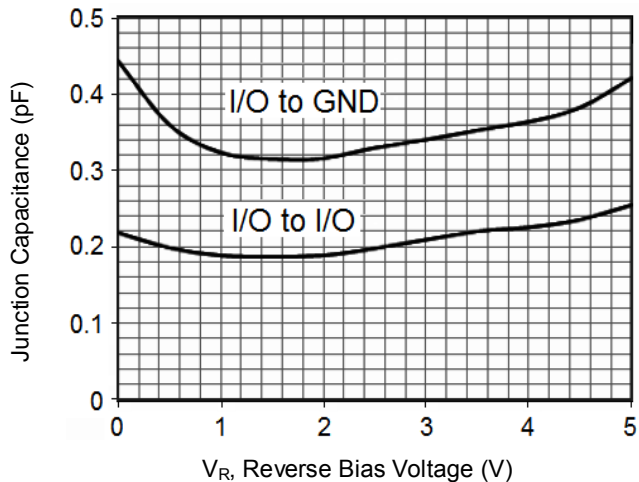


TLP Measurement

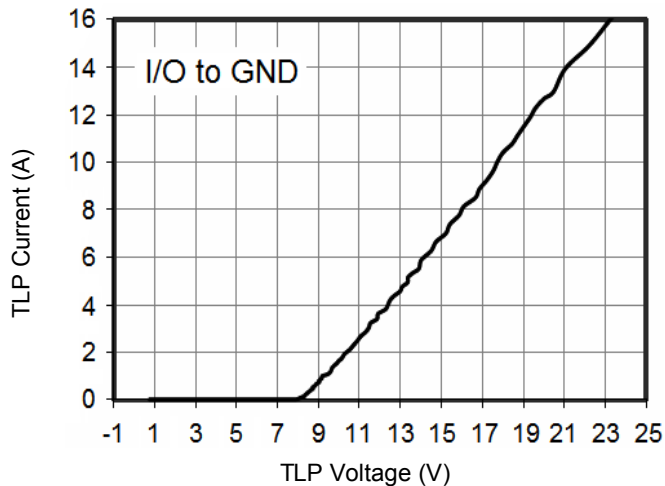

Typical Peak Clamping Voltage (8/20 μ s)

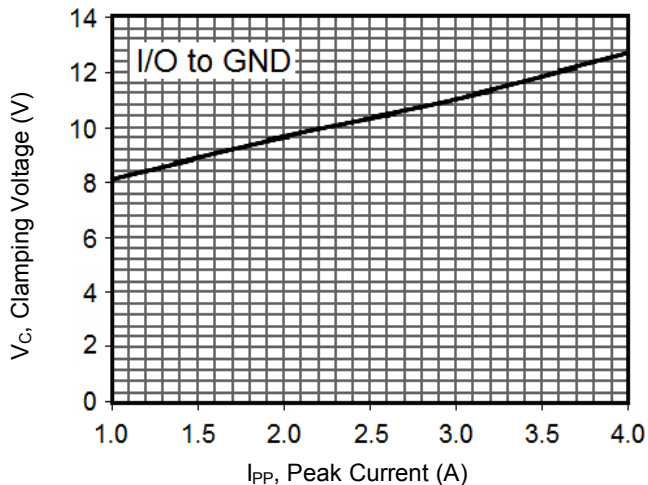

Pulse Waveform

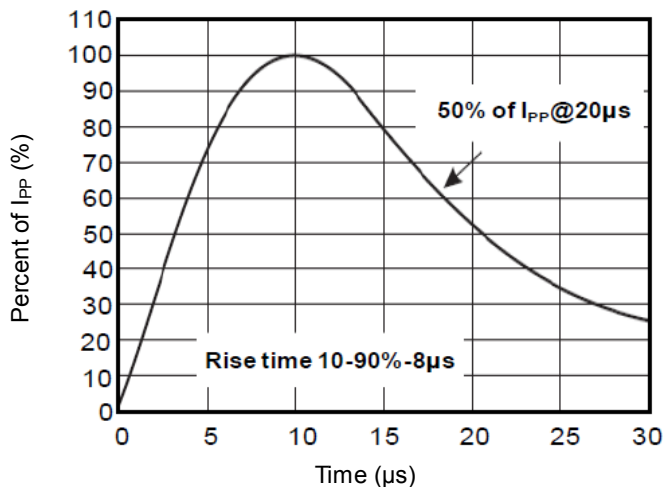

ESD Suppressor


5V 2-Unidirectional DFN1006-3

ME52U10D023P35

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.45	0.55
A1	-	0.05
b2	0.45	0.55
D	0.95	1.05
E	0.55	0.65
z	0.10	0.10
L1	0.20	0.30
L2	0.20	0.30
L3	0.40	0.40
C	0.70	0.70
G1	0.30	0.30
X	0.40	0.40
X1	1.10	1.10
Y1	0.60	0.60

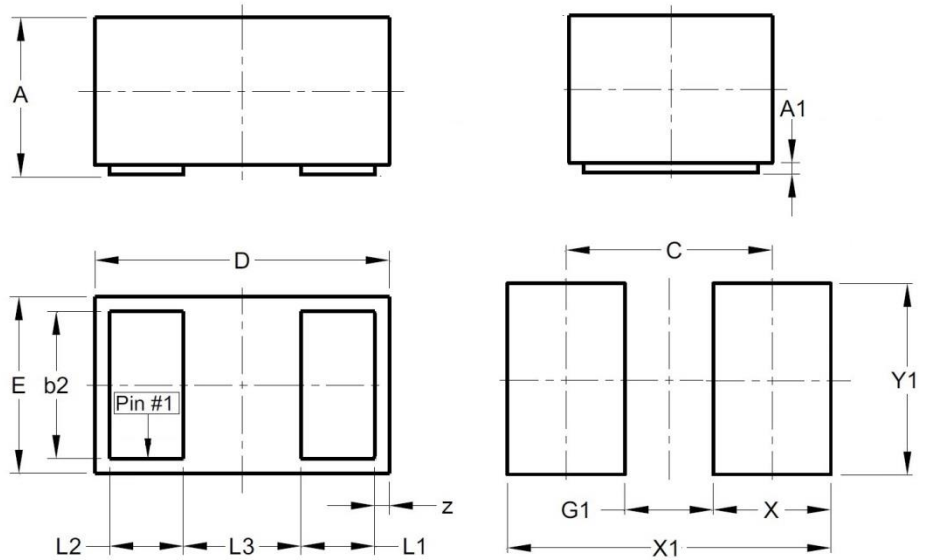

*Specifications subject to change without notice.