


ESD Suppressor 5V Unidirectional SOD-523

ME51U9V8S52345

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 15\text{KV}$ (Air) $\pm 8\text{KV}$ (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- ESD Protection for one Unidirectional Channel
- Low Leakage Current
- Low Clamping Voltage

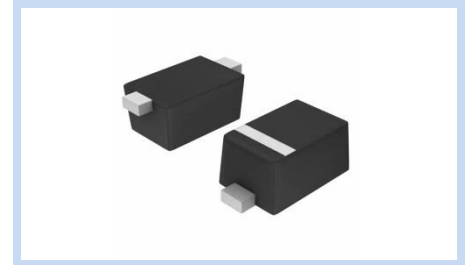

APPLICATION

- Cellular Handsets & Accessories
- Portable Instrumentation
- Notebooks, Desktops, Servers
- Serial and Parallel Ports
- Peripherals



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	V_{ESD}	± 8	KV
ESD Voltage (Air discharge)		± 15	
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	200	W
Operating Temperature Range	T_J	-55~+125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	5	V
Reverse Breakdown Voltage	$I_{BR}=1\text{mA}$	V_{BR}	6	--	--	V
Reverse Leakage Current	$V_R=5\text{V}$	I_R	--	--	2.0	μA
Clamping Voltage	$I_{PP}=1\text{A}$, $t_p=8/20\mu s$	V_C	--	--	9.8	V
Off State Junction Capacitance	$V_{dc}=0$, $f=1\text{MHz}$	C_J	--	36	45	pF

Notes: $T_J=25^{\circ}\text{C}$ unless otherwise specified


ESD Suppressor 5V Unidirectional SOD-523

ME51U9V8S52345


MERITEK

CHARACTERISTIC CURVES


Derating Curve

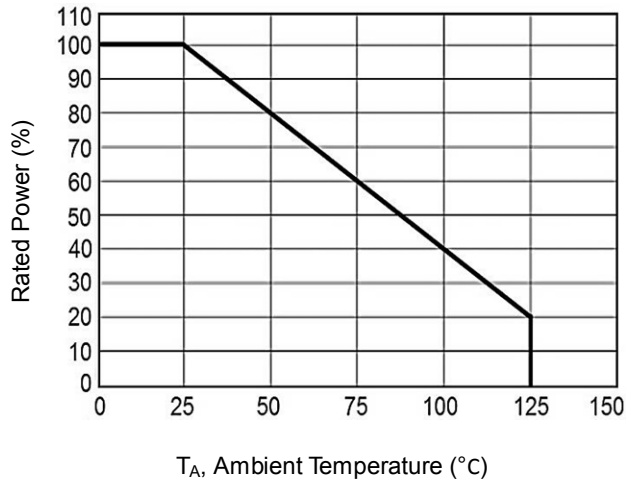


Pulse Waveforms

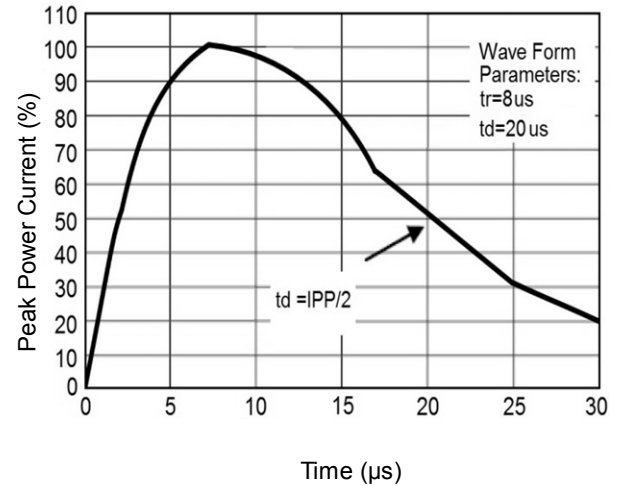

Non- Repetitive Peak Pulse Power vs. Pulse Time

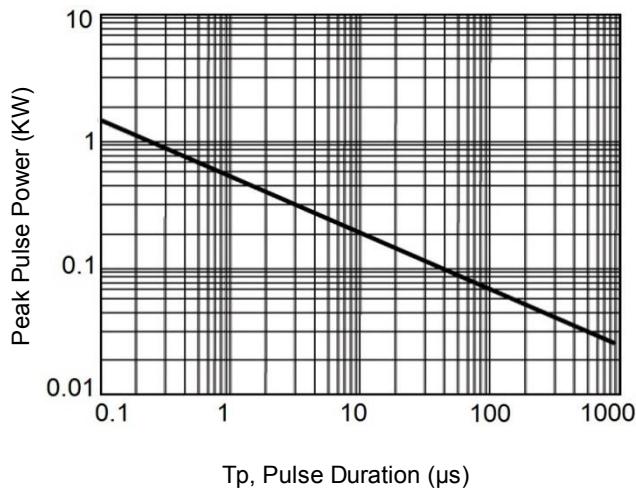

Junction Capacitance vs. Reverse Voltage

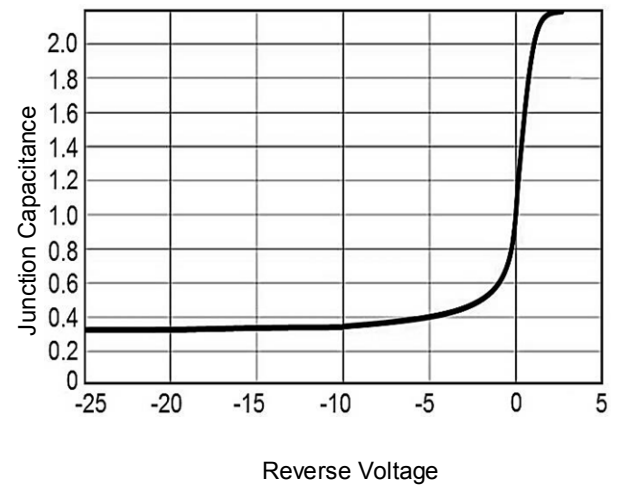




ESD Suppressor 5V Unidirectional SOD-523

ME51U9V8S52345

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.51	0.70
b	0.25	0.35
C	0.08	0.15
D	0.75	0.85
E	1.10	1.30
He	1.50	1.70
L2	0.15	0.25
C	1.40	1.40
G	0.80	0.80
X	0.60	0.60
X1	2.00	2.00
Y	0.70	0.70

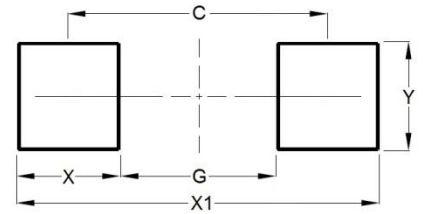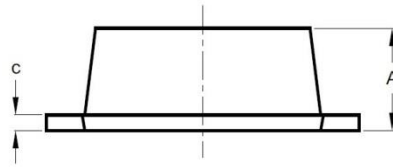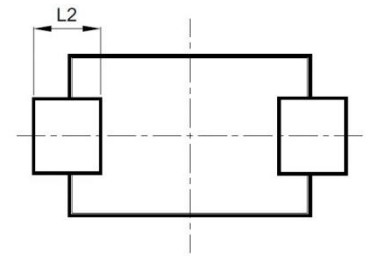

*Specifications subject to change without notice.