


# ESD Suppressor 6V 2-Unidirectional SOIC-08

ME62U15SO8

MERITEK


## FEATURE

- IEC 61000-4-2 ESD:  $\pm 30\text{KV}$  (Air)  $\pm 30\text{KV}$  (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- IEC 61000-4-5 Lightning: 100A (8/20 $\mu\text{s}$ )
- Bellcore 1089 (intra-building) 100A (2/20 $\mu\text{s}$ )
- ITU K.20 IPP=40A (5/310 $\mu\text{s}$ )
- ESD Protection for two Unidirectional Channels
- Low Clamping Voltage

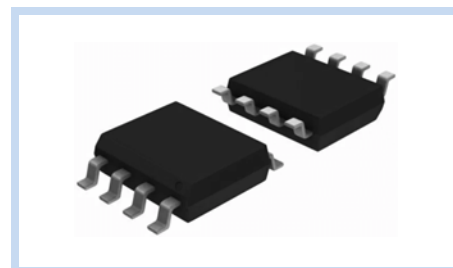

## APPLICATION

- 10/100/1000 BaseT Ethernet
- STS-1 Interfaces
- T1/E1 Line Cards
- T3/E3 and DS3 Interfaces



## MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage (Contact discharge)	$V_{ESD}$	$\pm 30$	KV
ESD Voltage (Air discharge)		$\pm 30$	
Peak Pulse Power (tp=8/20 $\mu\text{s}$ )	$P_{PP}$	2000	W
Peak Pulse Current (tp=8/20 $\mu\text{s}$ )	$I_{PP}$	100	A
Operating & Storage Temperature Range	$T_J, T_{STG}$	-55~+150	$^{\circ}\text{C}$


## ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	$V_{RWM}$	--	--	6	V
Punch-Through Voltage	$I_{PT}=1\text{mA}$	$V_{PT}$	6.8	--	--	V
Reverse Leakage Current	$V_R=6\text{V}$	$I_R$	--	--	20	$\mu\text{A}$
Clamping Voltage	$I_{PP}=50\text{A}, t_p=8/20\mu\text{s}, \text{Line to GND}$	$V_C$	--	--	15	V
	$I_{PP}=50\text{A}, t_p=8/20\mu\text{s}, \text{Line to Line}$		--	--	18	
	$I_{PP}=100\text{A}, t_p=8/20\mu\text{s}, \text{Line to GND}$		--	--	20	
	$I_{PP}=100\text{A}, t_p=8/20\mu\text{s}, \text{Line to Line}$		--	--	24	
Off State Junction Capacitance	$V_{dc}=0, f=1\text{MHz}, \text{Between I/O pins and GND}$	$C_J$	--	15	30	pF
	$V_{dc}=0, f=1\text{MHz}, \text{Between I/O pins}$		--	12	30	


Notes:  $T_A=25^{\circ}\text{C}$  unless otherwise specified.

**CHARACTERISTIC CURVES**


**Derating Curve**

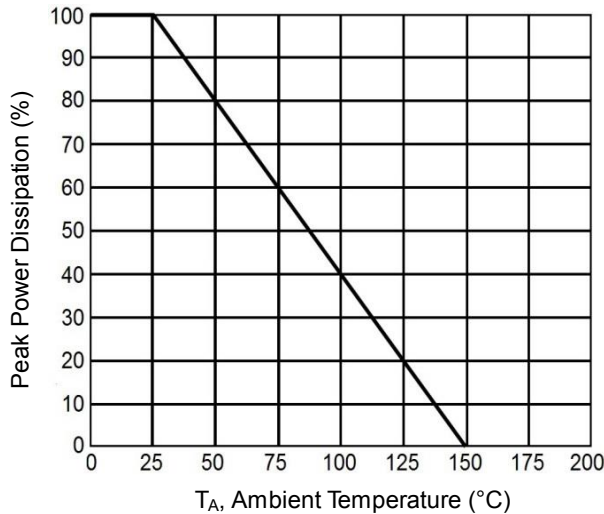


**Pulse Waveforms**

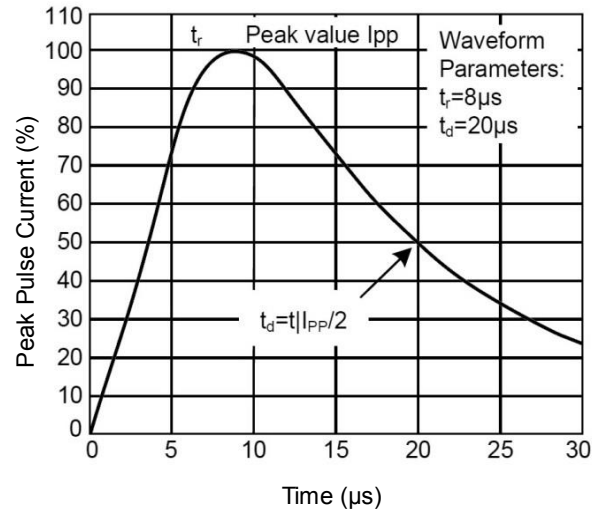


**Non-Repetitive Peak Pulse vs. Pulse Time**

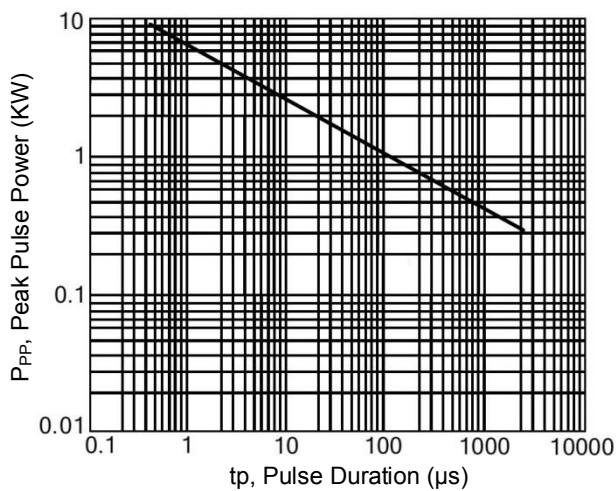

**Capacitance vs. Reverse Voltage**

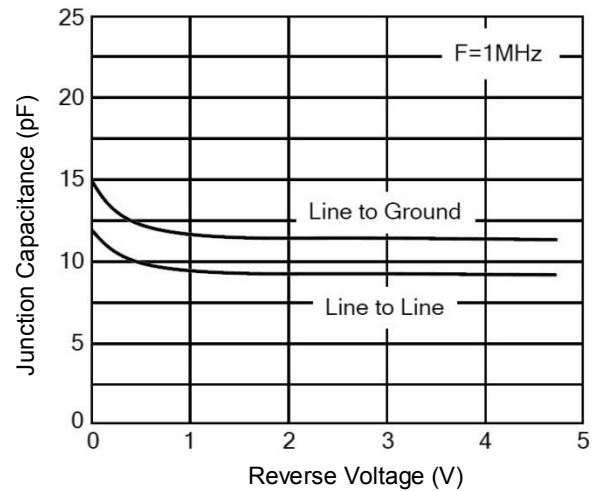

**Clamping Voltage vs. Peak Pulse Current**

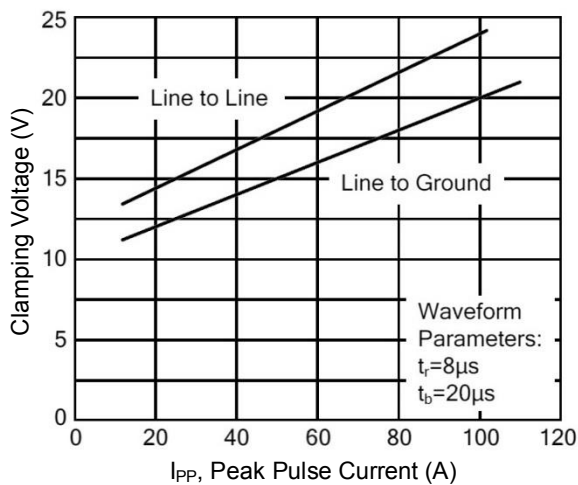



**ESD Suppressor**  
**6V 2-Unidirectional SOIC-08**

ME62U15SO8

**MERITEK**

**DIMENSIONS AND RECOMMENDED LAND PATTERN**

Item	Min (mm)	Max (mm)
A	4.80	5.00
B	5.80	6.20
C	3.80	4.00
D	1.27	1.27
E	0.33	0.51
F	0.40	1.27
G	0.19	0.25
H	1.35	1.75
H1	0.10	0.25
H2	1.45	1.45
X	0.73	0.73
X1	1.27	1.27
Y	1.20	1.20
Y1	6.60	6.60

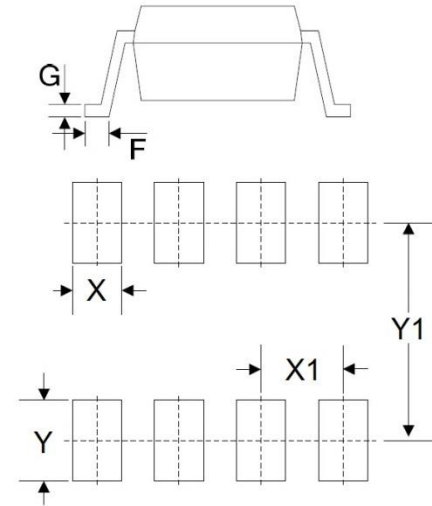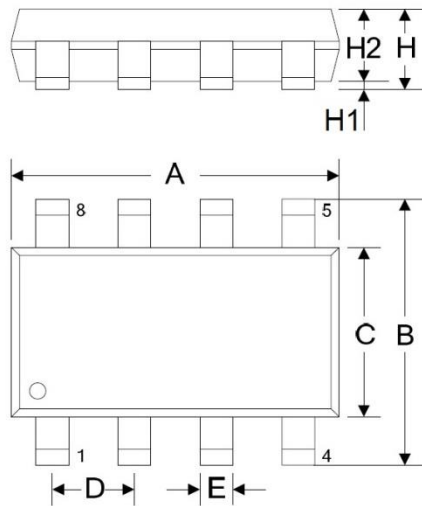

\*Specifications subject to change without notice.