

Transient Voltage Suppressors 400W DO-214AC

P4SMA-E Series

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 30\text{kv}$ (Air), $\pm 30\text{kv}$ (Contact)
- 400W Peak Pulse Power (10/1000 μs Waveform), Repetition Rate: 0.01%
- Low Inductance
- Fast Response Time
- Excellent Clamping Capability
- Glass Passivated Junction
- UL Flammability Classification Rating: 94V-0
- UL Safety Approved Certification No: E223045



MECHANICAL DATA

- Case: DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Color Band Denotes Cathode End Except Bipolar



MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation on 10/1000 μs waveform	P_{PPM}	Minimum 400	W
Peak Pulse Current on 10/1000 μs waveform	I_{PPM}	See Table	A
Steady State Power Dissipation at $T_A = 50^\circ\text{C}$	$P_{\text{M(AV)}}$	3.3	W
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I_{FSM}	40	A
Operating Junction And Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Typical Thermal Resistance Junction to Lead	$R_{\theta\text{JL}}$	30	$^\circ\text{C/W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta\text{JA}}$	120	$^\circ\text{C/W}$

Note:

1. $T_A = 25^\circ\text{C}$ ambient temperature unless otherwise specified.
2. Non-repetitive current pulse, and derate above $T_A = 25^\circ\text{C}$.
3. Mounted on 5X5mm (0.3mm thick) copper pads to each terminal.
4. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minute maximum.

DIMENSIONS- DO-214(SMA)

Item	Min (mm)	Max (mm)
A	1.25	1.65
B	3.99	4.50
C	2.54	2.79
D	1.98	2.29
E	4.93	5.28
G	-	0.203
H	0.76	1.52
J	2.00	2.50
X	2.07	
X1	5.80	
X2	1.66	
Y	2.06	

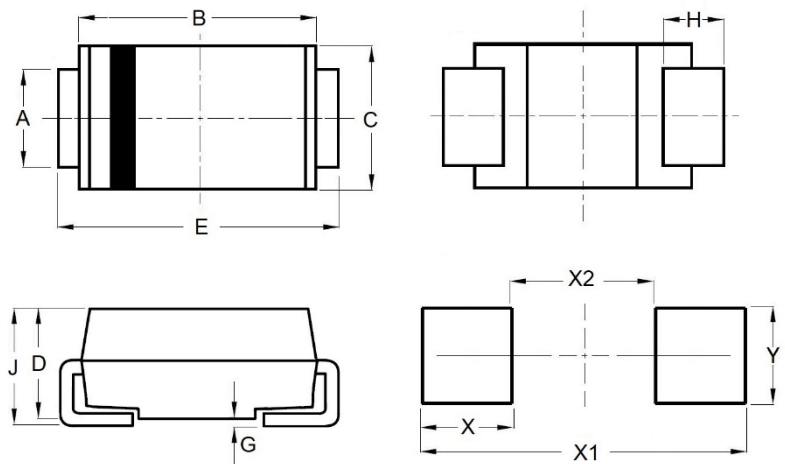

Transient Voltage Suppressors 400W DO-214AC

P4SMA-E Series

MERITEK


ELECTRICAL CHARACTERISTICS

Part Number		Working Reverse Voltage	Reverse Breakdown Voltage		Test Current	Max Reverse Leakage Current	Max Clamping Voltage	Reverse Surge Current
Uni-Polar	Bi-Polar	V _{RWM} (V)	V _{BR} Min(V)	V _{BR} Max(V)	I _T (mA)	I _R (uA) @ V _{RWM}	V _C (V) @ I _{PP}	I _{PP} (A) Max
P4SMA6.8A-E	P4SMA6.8CA-E	5.80	6.45	7.14	10	1000	10.5	39.0
P4SMA7.5A-E	P4SMA7.5CA-E	6.40	7.13	7.88	10	500	11.3	36.3
P4SMA8.2A-E	P4SMA8.2CA-E	7.02	7.79	8.61	10	200	12.1	33.9
P4SMA9.1A-E	P4SMA9.1CA-E	7.78	8.65	9.55	1	50	13.4	30.6
P4SMA10A-E	P4SMA10CA-E	8.55	9.50	10.5	1	10	14.5	28.3
P4SMA11A-E	P4SMA11CA-E	9.40	10.5	11.6	1	5	15.6	26.3
P4SMA12A-E	P4SMA12CA-E	10.2	11.4	12.6	1	5	16.7	24.6
P4SMA13A-E	P4SMA13CA-E	11.1	12.4	13.7	1	1	18.2	22.5
P4SMA15A-E	P4SMA15CA-E	12.8	14.3	15.8	1	1	21.2	19.3
P4SMA16A-E	P4SMA16CA-E	13.6	15.2	16.8	1	1	22.5	18.2
P4SMA18A-E	P4SMA18CA-E	15.3	17.1	18.9	1	1	25.2	16.1
P4SMA20A-E	P4SMA20CA-E	17.1	19.0	21.0	1	1	27.7	14.8
P4SMA22A-E	P4SMA22CA-E	18.8	20.9	23.1	1	1	30.6	13.4
P4SMA24A-E	P4SMA24CA-E	20.5	22.8	25.2	1	1	33.2	12.3
P4SMA27A-E	P4SMA27CA-E	23.1	25.7	28.4	1	1	37.5	10.9
P4SMA30A-E	P4SMA30CA-E	25.6	28.5	31.5	1	1	41.4	9.9
P4SMA33A-E	P4SMA33CA-E	28.2	31.4	34.7	1	1	45.7	9.0
P4SMA36A-E	P4SMA36CA-E	30.8	34.2	37.8	1	1	49.9	8.2
P4SMA39A-E	P4SMA39CA-E	33.3	37.1	41.0	1	1	53.9	7.6
P4SMA43A-E	P4SMA43CA-E	36.8	40.9	45.2	1	1	59.3	6.9
P4SMA47A-E	P4SMA47CA-E	40.2	44.7	49.4	1	1	64.8	6.3
P4SMA51A-E	P4SMA51CA-E	43.6	48.5	53.6	1	1	70.1	5.8
P4SMA56A-E	P4SMA56CA-E	47.8	53.2	58.8	1	1	77.0	5.3
P4SMA62A-E	P4SMA62CA-E	53.0	58.9	65.1	1	1	85.0	4.8
P4SMA68A-E	P4SMA68CA-E	58.1	64.6	71.4	1	1	92.0	4.5
P4SMA75A-E	P4SMA75CA-E	64.1	71.3	78.8	1	1	103	4.0
P4SMA82A-E	P4SMA82CA-E	70.1	77.9	86.1	1	1	113	3.6
P4SMA91A-E	P4SMA91CA-E	77.8	86.5	95.5	1	1	125	3.3
P4SMA100A-E	P4SMA100CA-E	85.5	95.0	105	1	1	137	3.0
P4SMA110A-E	P4SMA110CA-E	94.0	105	116	1	1	152	2.7
P4SMA120A-E	P4SMA120CA-E	102	114	126	1	1	165	2.5
P4SMA130A-E	P4SMA130CA-E	111	124	137	1	1	179	2.3
P4SMA150A-E	P4SMA150CA-E	128	143	158	1	1	207	2.0
P4SMA160A-E	P4SMA160CA-E	136	152	168	1	1	219	1.9
P4SMA170A-E	P4SMA170CA-E	145	162	179	1	1	234	1.8
P4SMA180A-E	P4SMA180CA-E	154	171	189	1	1	246	1.7
P4SMA200A-E	P4SMA200CA-E	171	190	210	1	1	274	1.5
P4SMA220A-E	P4SMA220CA-E	185	209	231	1	1	328	1.3
P4SMA250A-E	P4SMA250CA-E	214	237	263	1	1	344	1.2
P4SMA300A-E	P4SMA300CA-E	256	285	315	1	1	414	1.0
P4SMA350A-E	P4SMA350CA-E	300	332	368	1	1	482	0.85
P4SMA400A-E	P4SMA400CA-E	342	380	420	1	1	548	0.75
P4SMA440A-E	P4SMA440CA-E	376	418	462	1	1	602	0.68
P4SMA480A-E	P4SMA480CA-E	408	456	504	1	1	658	0.61
P4SMA510A-E	P4SMA510CA-E	434	485.0	535.0	1	1	698	0.57
P4SMA530A-E	P4SMA530CA-E	450	503.5	556.5	1	1	725	0.55
P4SMA540A-E	P4SMA540CA-E	459	513.0	567.0	1	1	740	0.54
P4SMA550A-E	P4SMA550CA-E	467	522.5	577.5	1	1	760	0.52
P4SMA600A-E	P4SMA600CA-E	510	570.0	630.0	1	1	828	0.48


Note: T_A = 25°C ambient temperature unless otherwise specified.

CHARACTERISTIC CURVES


Peak Pulse Power Rating Curve

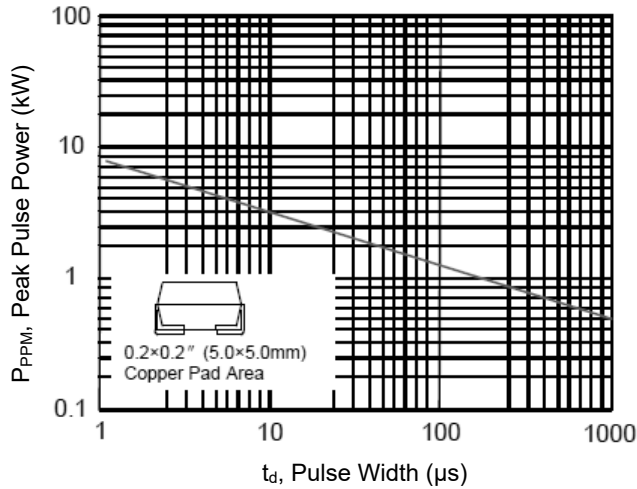


Pulse Derating Curve

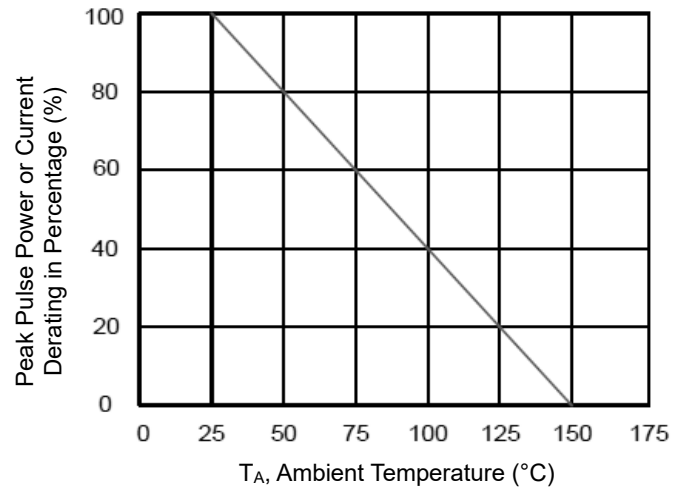


Pulse Waveform

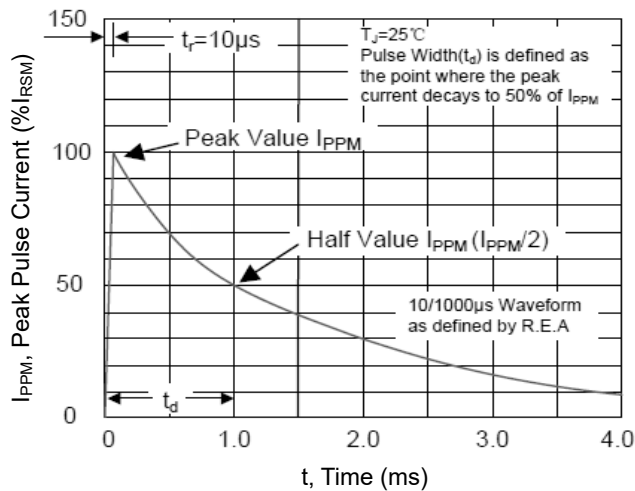


Typical Junction Capacitance

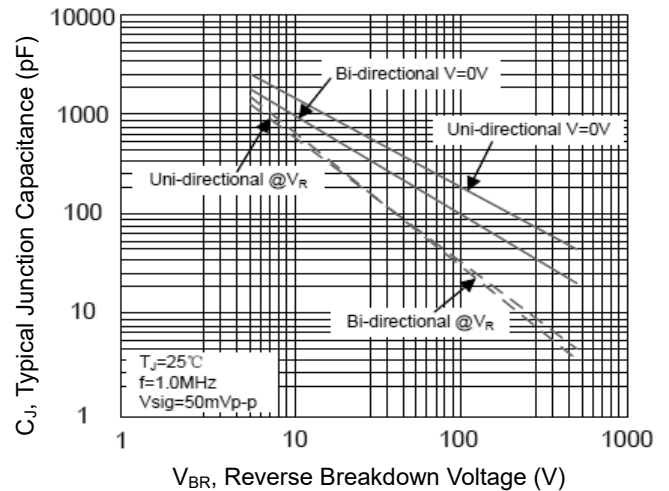

Steady State Power Dissipation Derating Curve

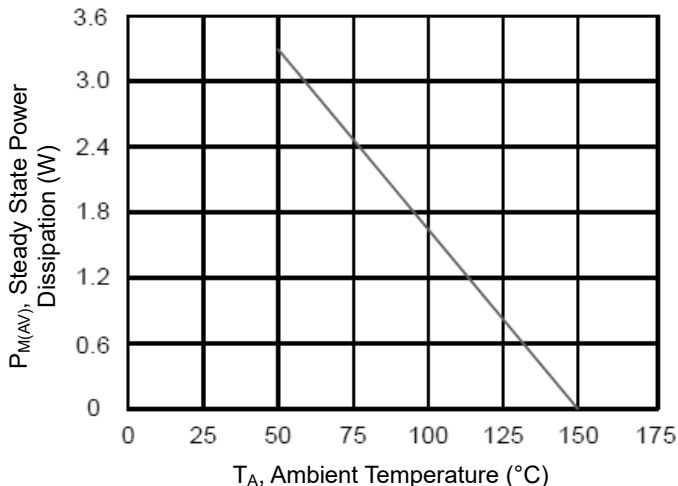

Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

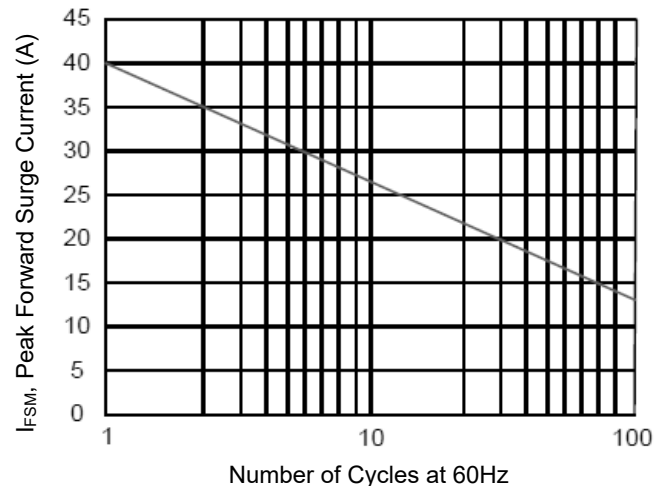

*Specifications subject to change without notice.