

Chip Ferrite Bead General Type

SIM03-38 series

MERITEK

FEATURE

- Operating Temperature: -55 ~ +125°C (Including self-temperature rise)
- Monolithic Inorganic Material Construction
- Low DC Resistance
- Noise reduction solution for Signal Line
- Excellent Solderability and Heat Resistance




PART NUMBERING SYSTEM

SIM 03 190 Y A40 38
(1) (2) (3) (4) (5) (6)



No	item	Code	Description	
(1)	Product Code	SIM	Signal Chip Inductor, Multi-Layer Chip Ferrite Bead Type	
(2)	Dimension	03	03: 0603, 1.6x0.8mm	See Dimension Table
(3)	Impedence	190	190: 19Ω	First two: Significant, Third: Multiplier
(4)	Tolerance	Y	Y: ±25%	-25% ~ +25%
(5)	Rated Current	A40	A40: 0.4A	Max Current, 'A' denotes decimal point
(6)	Series Code	38	Chip Ferrite Bead	Internal Control Code

DIMENSIONS

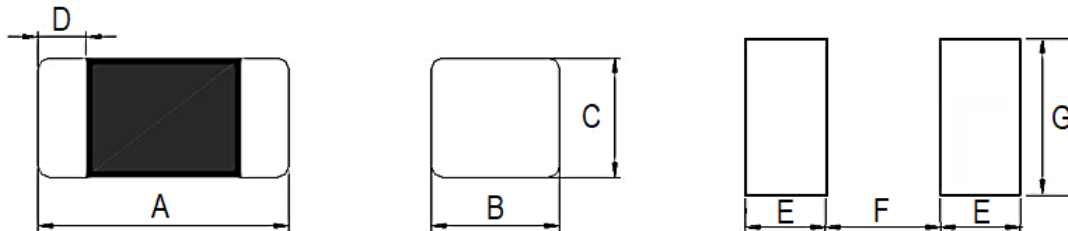

Size Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
SIM01 (0201)	0.60±0.03	0.30±0.03	0.30±0.03	0.1~0.2	0.35	0.30	0.40
SIM02 (0402)	1.00±0.10	0.50±0.10	0.50±0.10	0.1~0.3	0.50	0.40	0.60
SIM03 (0603)	1.60±0.15	0.80±0.15	0.80±0.15	0.2~0.6	0.80	0.85	0.95
SIM05 (0805)	2.00±0.20	1.25±0.20	0.85±0.20	0.2~0.8	1.05	1.00	1.45
SIM06 (1206)	3.20±0.20	1.60±0.20	1.10±0.20	0.4~1.0	1.05	2.20	1.80
SIM10 (1210)	3.20±0.20	2.50±0.20	1.30±0.20	0.6~1.0	1.05	2.20	2.70
SIM86 (1806)	4.50±0.20	1.60±0.20	1.60±0.20	0.6~1.0	1.05	3.30	1.80
SIM82 (1812)	4.50±0.20	3.20±0.20	1.50±0.20	0.6~1.0	1.05	3.30	3.40

Chip Ferrite Bead General Type

SIM03-38 series

MERITEK


ELECTRICAL CHARACTERISTICS

Size	Part Number	Impedance (Ω)	Tolerance (%)	Test Frequency (MHz)	DCR (Ω) Max	Rated Current (mA) Max
0603	SIM03190YA4038	19	±25	100	0.10	400
	SIM03310YA4038	31	±25	100	0.10	400
	SIM03520YA4038	52	±25	100	0.15	400
	SIM03600YA4038	60	±25	100	0.15	400
	SIM03800YA4038	80	±25	100	0.15	400
	SIM03101YA4038	100	±25	100	0.15	400
	SIM03121YA4038	120	±25	100	0.15	400
	SIM03151YA4038	150	±25	100	0.15	400
	SIM03181YA4038	180	±25	100	0.20	400
	SIM03201YA4038	200	±25	100	0.20	400
	SIM03221YA4038	220	±25	100	0.20	400
	SIM03301YA4038	300	±25	100	0.30	400
	SIM03401YA4038	400	±25	100	0.30	400
	SIM03451YA4038	450	±25	100	0.30	400
	SIM03601YA4038	600	±25	100	0.35	400
	SIM03751YA4038	750	±25	100	0.35	400
	SIM03102YA30A38	1000	±25	100	0.55	300
	SIM03152YA2038	1500	±25	100	0.60	200
	SIM03050YA7038	5	±25	100	0.08	700
	SIM03300YA5038	30	±25	100	0.20	500
	SIM03600YA4538	60	±25	100	0.25	450
	SIM03101YA4538	100	±25	100	0.30	450
	SIM03121YA4538	120	±25	100	0.30	450
	SIM03151YA4538	150	±25	100	0.35	450
	SIM03221YA4538	220	±25	100	0.35	450
	SIM03301YA4538	300	±25	100	0.35	450
	SIM03471YA4538	470	±25	100	0.35	450
	SIM03601YA4538	600	±25	100	0.40	450
	SIM03102YA30B38	1000	±25	100	0.60	300
	SIM03471YA2038	470	±25	100	0.55	200
	SIM03601YA2038	600	±25	100	0.65	200
	SIM03751YA2038	750	±25	100	0.70	200
	SIM03102YA1038	1000	±25	100	0.85	100
	SIM03152YA1038	1500	±25	100	0.90	100
	SIM03202YA1038	2000	±25	100	1.00	100
	SIM03252YA0538	2500	±25	100	1.00	50
	SIM03070YA9038	7	±25	100	0.10	900
	SIM03100YA9038	10	±25	100	0.10	900
	SIM03680YA7038	68	±25	100	0.10	700
	SIM03121YA3038	120	±25	100	0.30	300
	SIM03301YA3038	300	±25	100	0.35	300
	SIM03601YA3038	600	±25	100	0.65	300
SIM03102YA0538	1000	±25	100	1.10	50	


Notes: 1. Maximum Rated Current: The DC current value having temperature increased 40°C after thru DC current 2 hours at ambient temperature.

CHARICTERISTIC CURVES


SIM03310YA4038

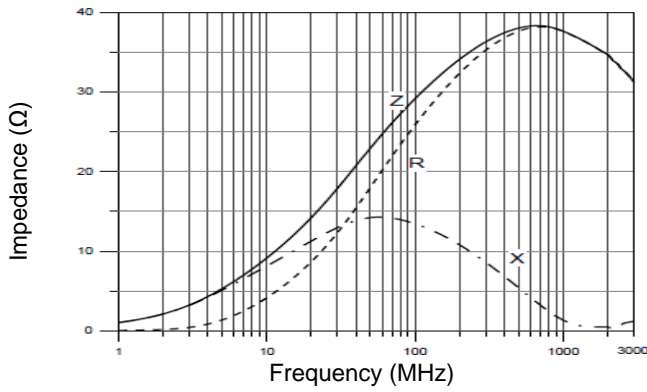


SIM03600YA4038

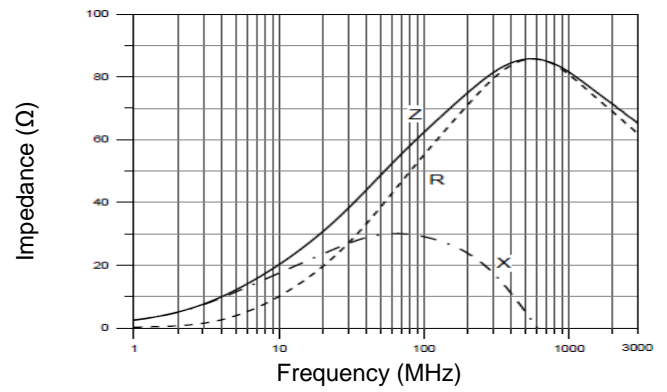


SIM03800YA4038

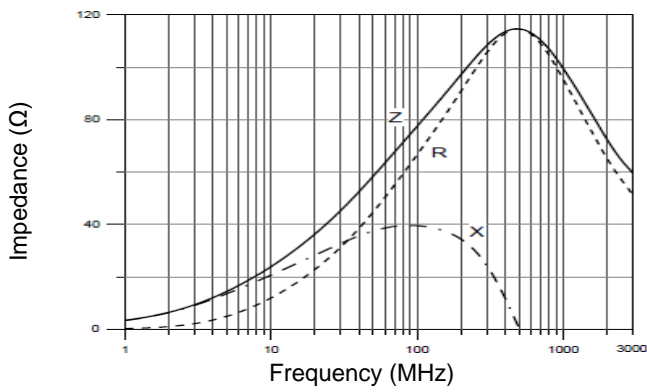


SIM03101YA4038

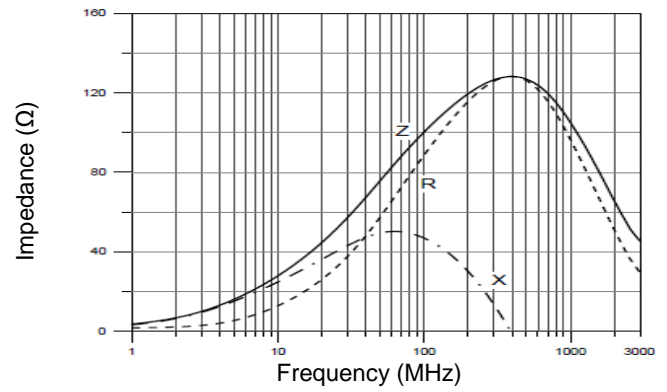


SIM03121YA4038

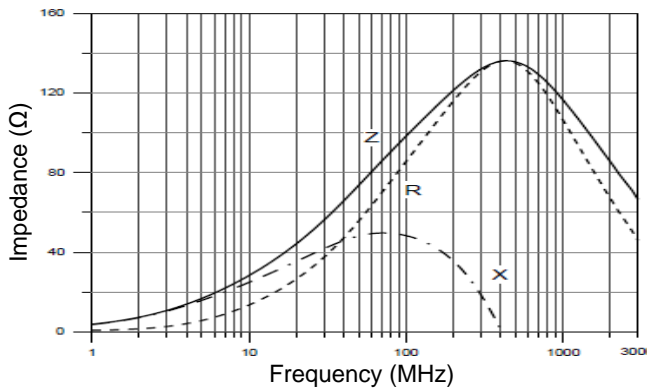


SIM03151YA4038

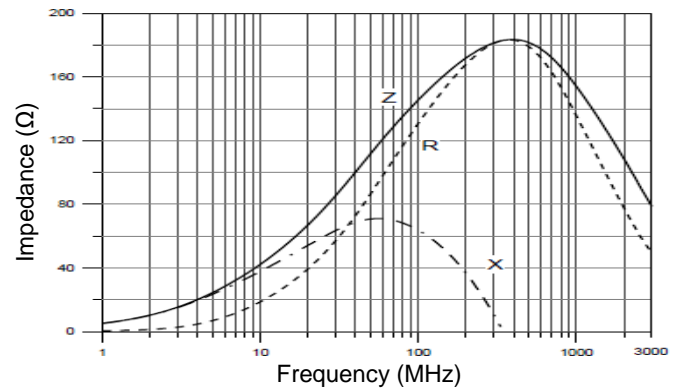

SIM03221YA4038

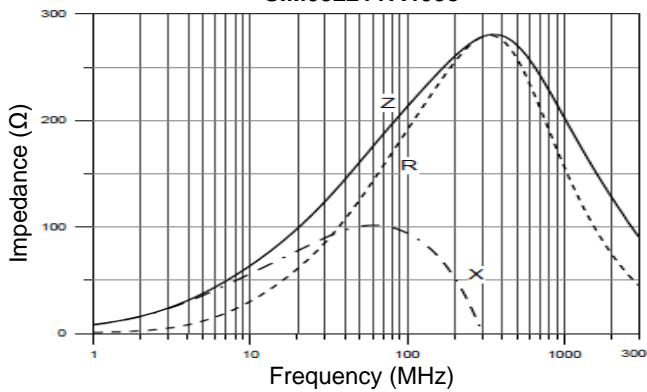


SIM03301YA4038

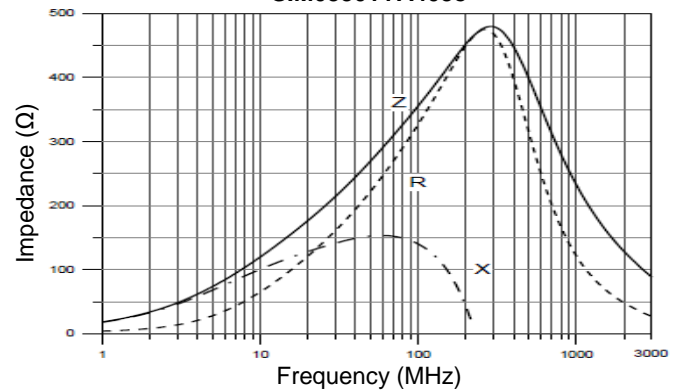


CHARICTERISTIC CURVES


SIM03401YA4038

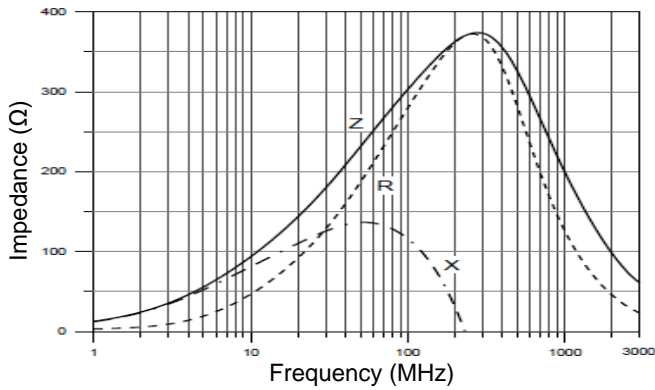


SIM03601YA4038

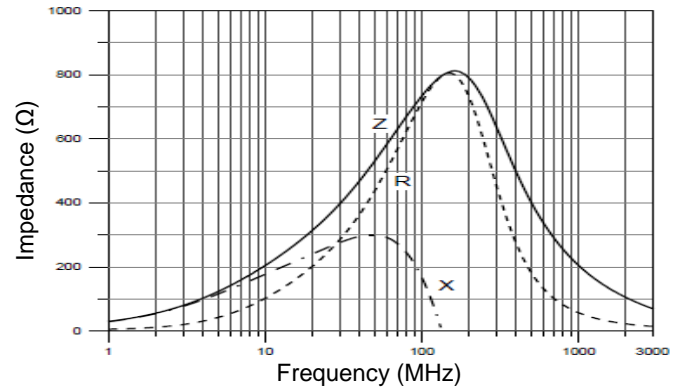


SIM03751YA4038

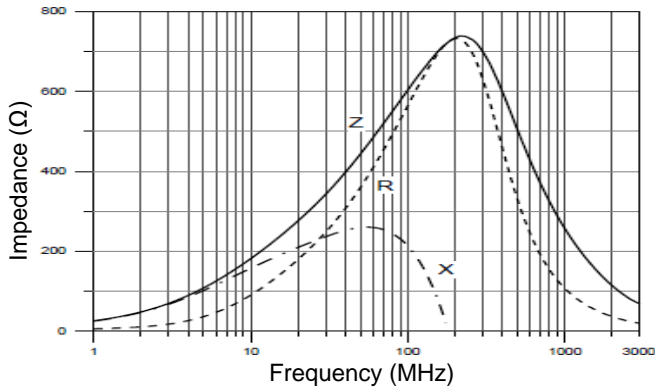


SIM03102YA30A38

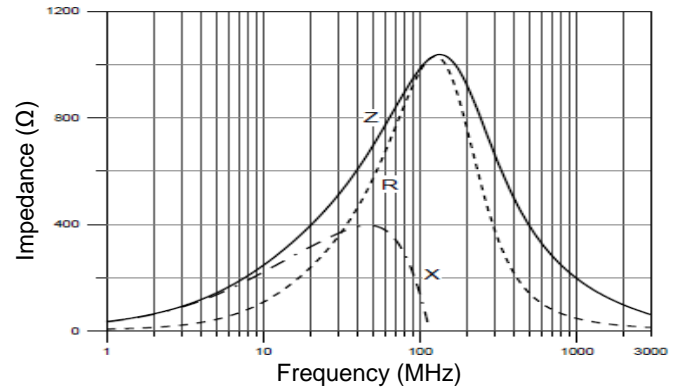


SIM03300YA5038

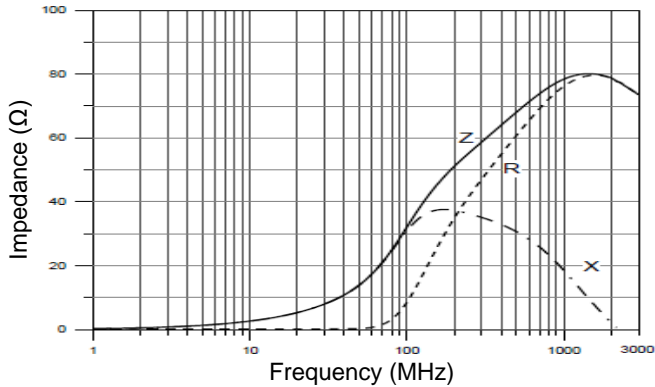


SIM03600YA4538

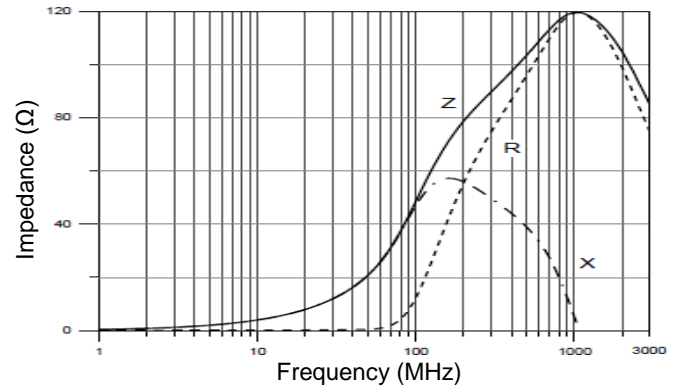

SIM03221YA4538

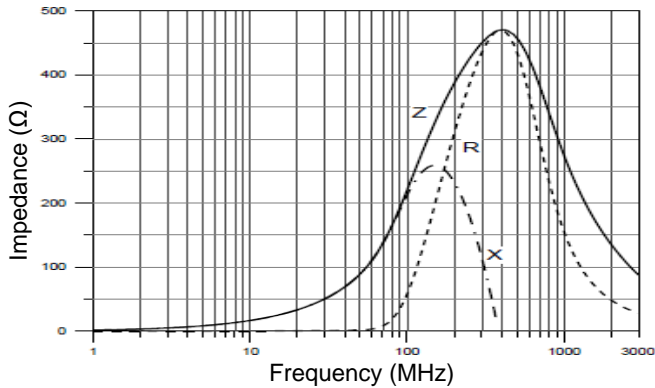


SIM03301YA4538

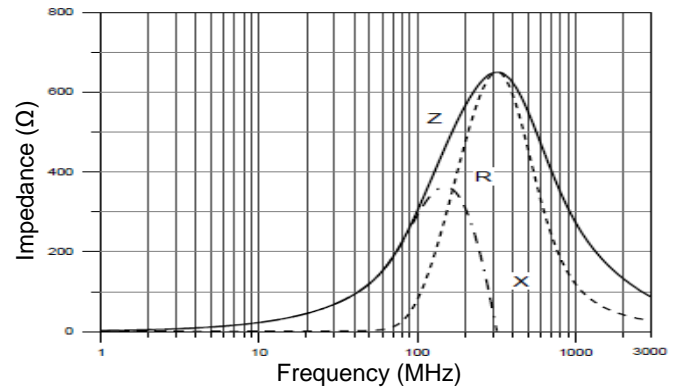


CHARICTERISTIC CURVES


SIM03601YA4538

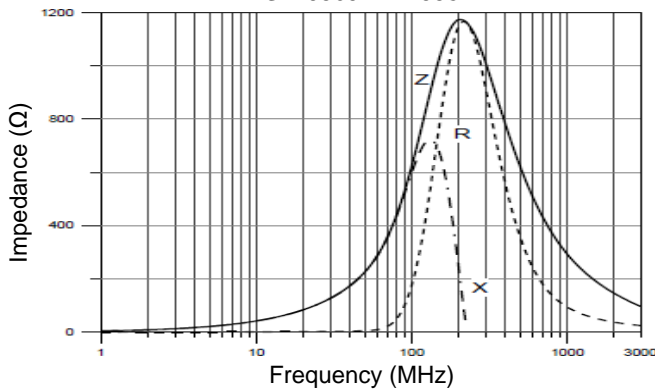


SIM03102YA30B38

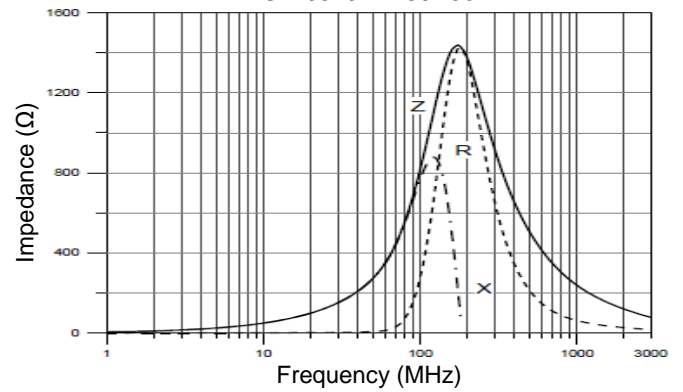


SIM03601YA2038

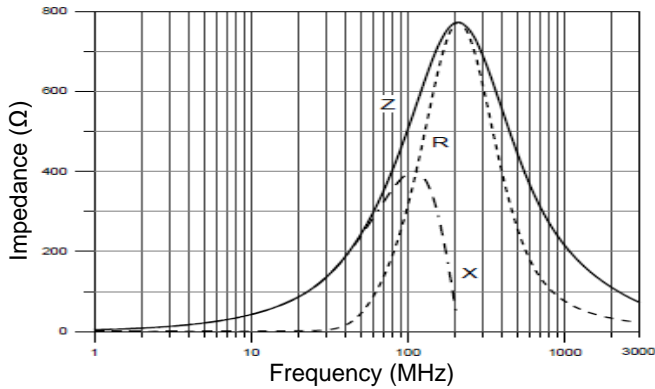


SIM03102YA1038

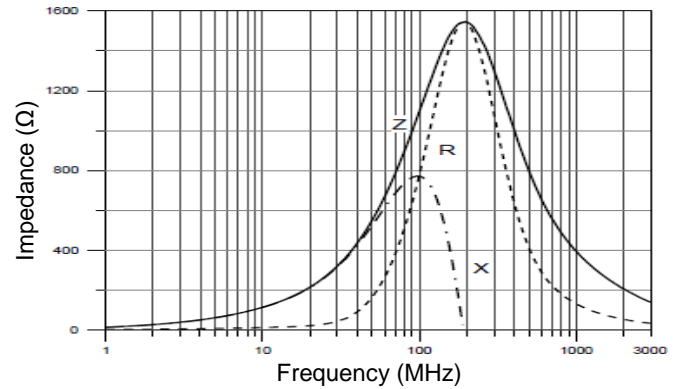


SIM03152YA1038

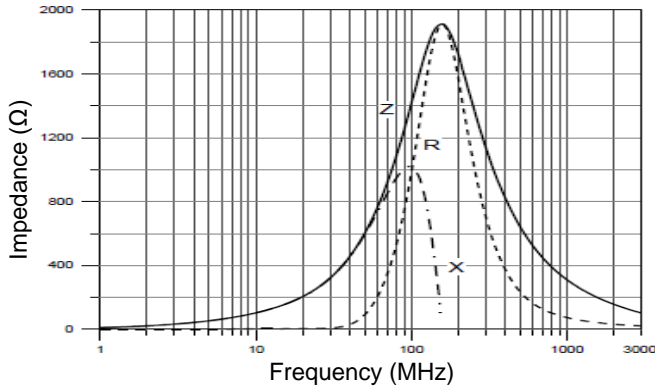


SIM03202YA1038

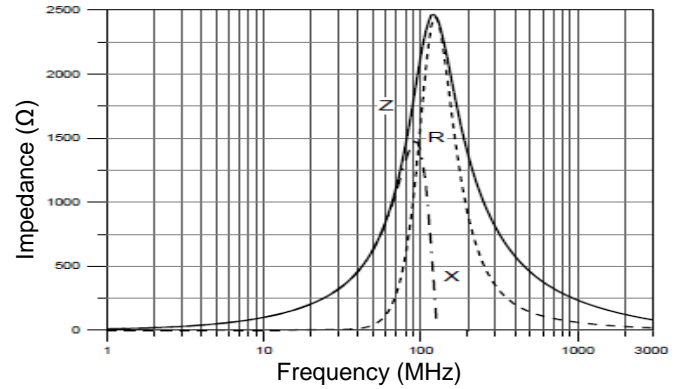

SIM03252YA0538

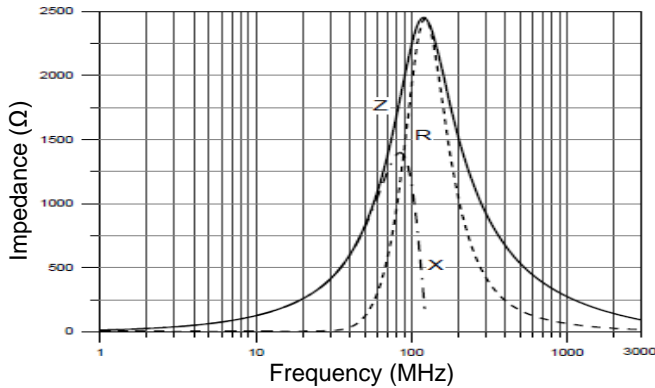


SIM03070YA9038

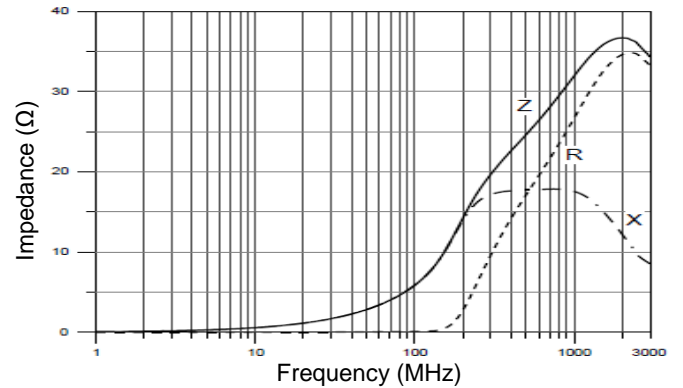


CHARICTERISTIC CURVES


SIM03100YA9038

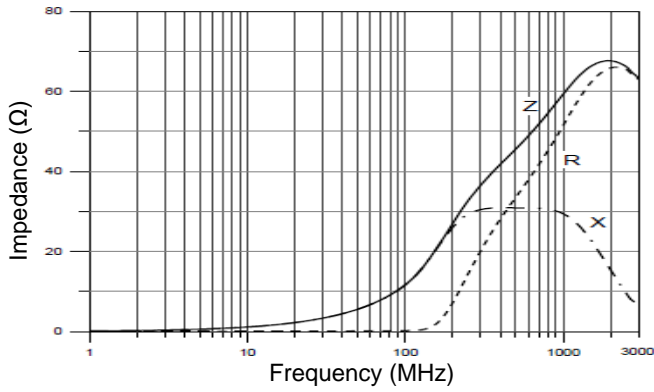


SIM03121YA3038

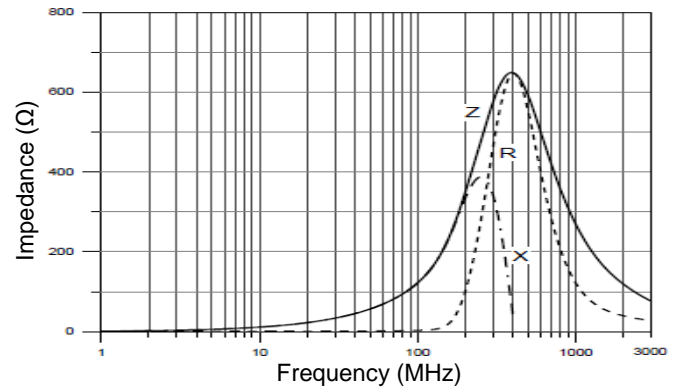

SIM03301YA3038

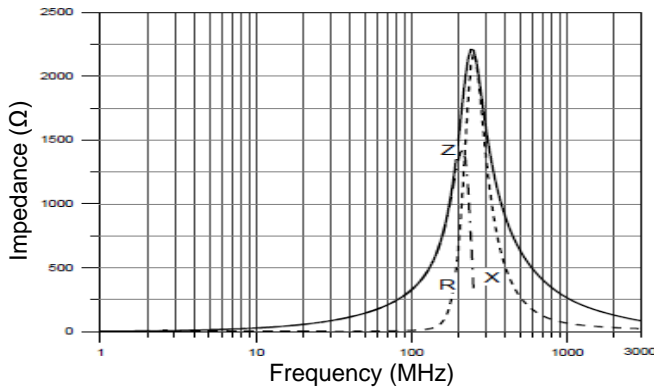

SIM03601YA3038

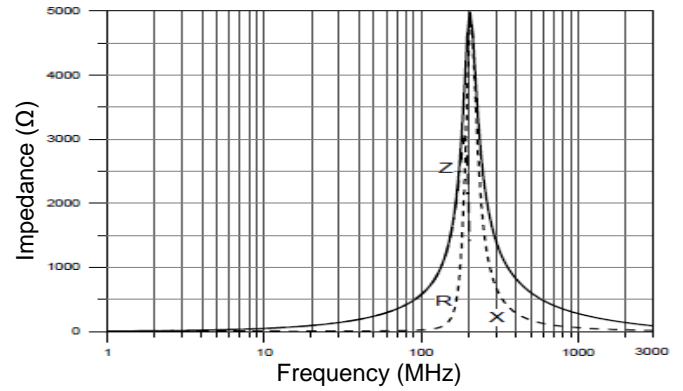

Chip Ferrite Bead General Type

SIM03-38 series


MERITEK

RELIABILITY TEST CONDITON AND REQUIREMENT

Item	Test Conditions	Requirement															
Solderability	Solder: Sn-3Ag-0.5Cu, Solder temperature: 240±5°C, Depth: completely cover the termination. Dip time: 3±1sec.	More than 95% of coverage															
Resistance to Soldering Heat	Solder temperature: 265±3°C for 6±1 seconds; Preheating: 100°C ~ 150°C for 1 min. Solder: Sn-3Ag-0.5Cu	Appearance: No damage. Electrical and Mechanical Characteristics shall be satisfied															
Vibration	Oscillation Frequency: 10~2K~10 Hz, Direction: X, Y, X Testing Time: 12 hours (4 hours, 3 orientations)	Appearance: No damage. Impedance: within ±30% of initial value															
Shock	Test condition: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Type</th> <th>Peak Value (g's)</th> <th>Normal duration (ms)</th> <th>Wave Form</th> <th>Velocity change (ft/sec)</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> <tr> <td>Lead</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> </tbody> </table>	Type	Peak Value (g's)	Normal duration (ms)	Wave Form	Velocity change (ft/sec)	SMD	100	6	Half-sine	12.3	Lead	100	6	Half-sine	12.3	Appearance: No damage. Impedance: within ±30% of initial value
Type	Peak Value (g's)	Normal duration (ms)	Wave Form	Velocity change (ft/sec)													
SMD	100	6	Half-sine	12.3													
Lead	100	6	Half-sine	12.3													
Terminal strength	With component mounted on a PCB apply a force 10N to the side of a device being tested. This force shall be applied for 10 +1 seconds. Also, the force shall be applied gradually as not to shock the component being tested.	Appearance: no damage.															
Thermal Shock	Number of cycles: 1000. Condition for 1 cycle: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>No.</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55±5°C</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 ~ 5</td> </tr> <tr> <td>3</td> <td>+125±2°C</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 ~ 5</td> </tr> </tbody> </table> Measured at room temperature after placing for 24±2 hrs.	No.	Temp. (°C)	Time (min.)	1	-55±5°C	30±3	2	Room Temp.	2 ~ 5	3	+125±2°C	30±3	4	Room Temp.	2 ~ 5	Appearance: No damage. Impedance: within ±30% of initial value
No.	Temp. (°C)	Time (min.)															
1	-55±5°C	30±3															
2	Room Temp.	2 ~ 5															
3	+125±2°C	30±3															
4	Room Temp.	2 ~ 5															
Bending	Device mounted on a test substrate, bend the substrate by 3mm, hold for 10sec and then return.	Appearance: The terminal electrode and the ferrite must not be damaged.															
Load Humidity	Humidity: 85±2%R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current. Measured at room temperature after 24±2 hrs.	Appearance: No damage. Impedance: within ±30% of initial value															
Life Test	Temperature: 125±2°C, Duration: 1000±12 Hrs. Measured at room temperature after 24±2 Hrs.	Appearance: No damage. Impedance: within ±30% of initial value															

RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{s(min)}$	120°C
	Temp. Max $T_{s(max)}$	180°C
	Time (min. to max.) (t_s)	50 ~ 150 seconds
Reflow	Temp. (T_L)	230°C
	Time (min. to max.) (t_L)	90 ~ 120 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual peak Temperature (t_p)		10 seconds max.
Reflow times:		3 times Max.

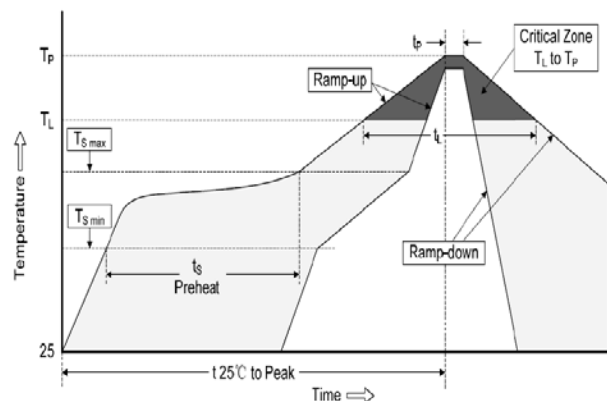

*Specifications subject to change without notice.