

Chip Ferrite Bead General Type

SIM06-38 series

MERITEK

FEATURE

- Operating Temperature: -55 ~ +125°C (Including self-temperature rise)
- Monolithic Inorganic Material Construction
- Low DC Resistance
- Noise reduction solution for Signal Line
- Excellent Solderability and Heat Resistance




PART NUMBERING SYSTEM

SIM 06 260 Y A80 38
(1) (2) (3) (4) (5) (6)



No	item	Code	Description	
(1)	Product Code	SIM	Signal Chip Inductor, Multi-Layer Chip Ferrite Bead Type	
(2)	Dimension	06	06: 1206, 3.2x1.6mm	See Dimension Table
(3)	Impedence	260	260: 26Ω	First two: Significant, Third: Multiplier
(4)	Tolerance	Y	Y: ±25%	-25% ~ +25%
(5)	Rated Current	A80	A80: 0.8A	Max Current, 'A' denotes decimal point
(6)	Series Code	38	Chip Ferrite Bead	Internal Control Code

DIMENSIONS

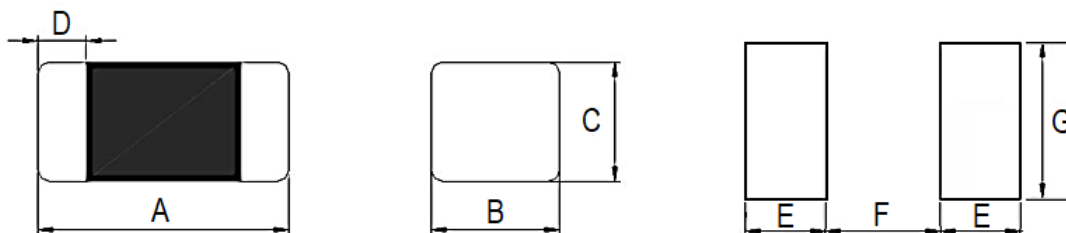

Size Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
SIM01 (0201)	0.60±0.03	0.30±0.03	0.30±0.03	0.1~0.2	0.35	0.30	0.40
SIM02 (0402)	1.00±0.10	0.50±0.10	0.50±0.10	0.1~0.3	0.50	0.40	0.60
SIM03 (0603)	1.60±0.15	0.80±0.15	0.80±0.15	0.2~0.6	0.80	0.85	0.95
SIM05 (0805)	2.00±0.20	1.25±0.20	0.85±0.20	0.2~0.8	1.05	1.00	1.45
SIM06 (1206)	3.20±0.20	1.60±0.20	1.10±0.20	0.4~1.0	1.05	2.20	1.80
SIM10 (1210)	3.20±0.20	2.50±0.20	1.30±0.20	0.6~1.0	1.05	2.20	2.70
SIM86 (1806)	4.50±0.20	1.60±0.20	1.60±0.20	0.6~1.0	1.05	3.30	1.80
SIM82 (1812)	4.50±0.20	3.20±0.20	1.50±0.20	0.6~1.0	1.05	3.30	3.40

Chip Ferrite Bead General Type

SIM06-38 series

MERITEK


ELECTRICAL CHARACTERISTICS

Size	Part Number	Impedance (Ω)	Tolerance (%)	Test Frequency (MHz)	DCR (Ω) Max	Rated Current (mA) Max
1206	SIM06260YA8038	26	±25	100	0.10	800
	SIM06310YA8038	31	±25	100	0.10	800
	SIM06520YA8038	52	±25	100	0.15	800
	SIM06600YA50A38	60	±25	100	0.15	500
	SIM06700YA5038	70	±25	100	0.15	500
	SIM06101YA4538	100	±25	100	0.20	450
	SIM06121YA4538	120	±25	100	0.20	450
	SIM06151YA4538	150	±25	100	0.20	450
	SIM06221YA3538	220	±25	100	0.20	350
	SIM06301YA3538	300	±25	100	0.20	350
	SIM06401YA3538	400	±25	100	0.25	350
	SIM06601YA3538	600	±25	100	0.25	350
	SIM06751YA3538	750	±25	100	0.30	350
	SIM06102YA3538	1000	±25	100	0.35	350
	SIM06152YA3538	1500	±25	100	0.40	350
	SIM06182YA3538	1800	±25	100	0.40	350
	SIM06190YA5038	19	±25	100	0.10	500
	SIM06310YA5038	31	±25	100	0.15	500
	SIM06600YA50B38	60	±25	100	0.20	500
	SIM06101YA3038	100	±25	100	0.25	300
	SIM06121YA3038	120	±25	100	0.25	300
	SIM06201YA3038	200	±25	100	0.25	300
	SIM06301YA30B38	300	±25	100	0.30	300
	SIM06601YA30B38	600	±25	100	0.35	300
	SIM06751YA3038	750	±25	100	0.35	300
	SIM06102YA20B38	1000	±25	100	0.40	200
	SIM06152YA2038	1500	±25	100	0.45	200
	SIM06202YA20B38	2000	±25	100	0.45	200
	SIM06B20YA20D38	2000	±25	30	0.60	200
	SIM06601YA2038	600	±25	100	0.50	200
	SIM06102YA20K38	1000	±25	100	0.70	200
	SIM06122YA2038	1200	±25	100	0.70	200
	SIM06050YA5038	5	±25	100	0.07	500
	SIM06070YA5038	7	±25	100	0.07	500
	SIM06301YA30H38	300	±25	100	0.30	300
	SIM06601YA30H38	600	±25	100	0.45	300


Notes: 1. Maximum Rated Current: The DC current value having temperature increased 40°C after thru DC current 2 hours at ambient temperature.

CHARICTERISTIC CURVES


SIM06260YA8038

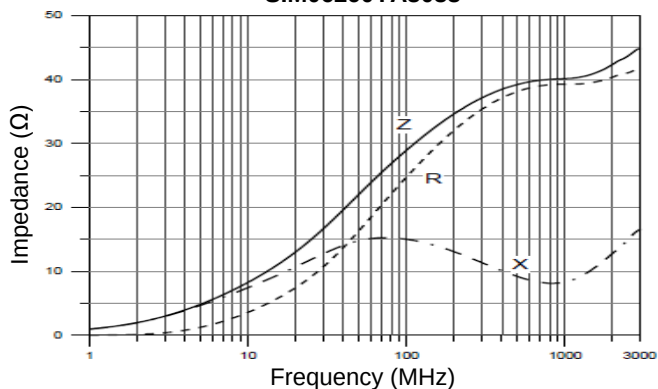


SIM06310YA8038

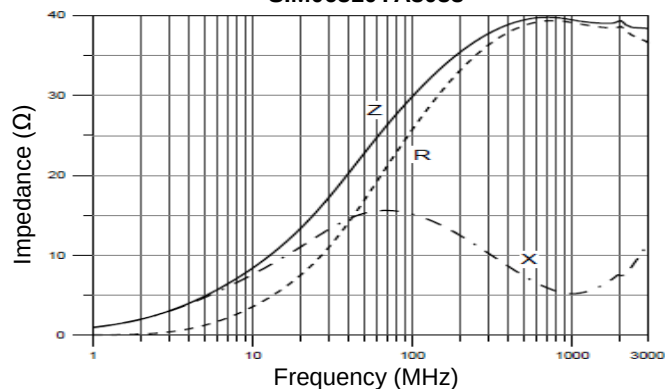


SIM06520YA8038

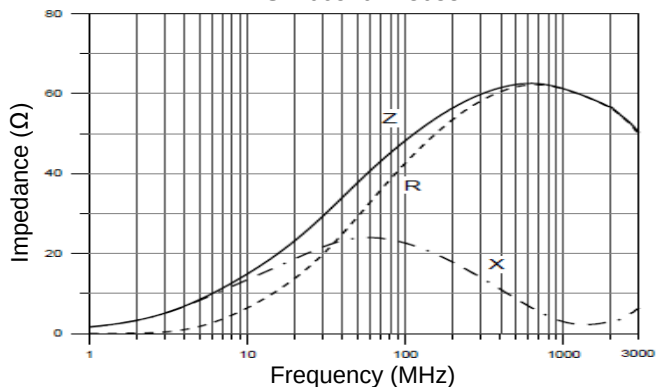


SIM06700YA5038

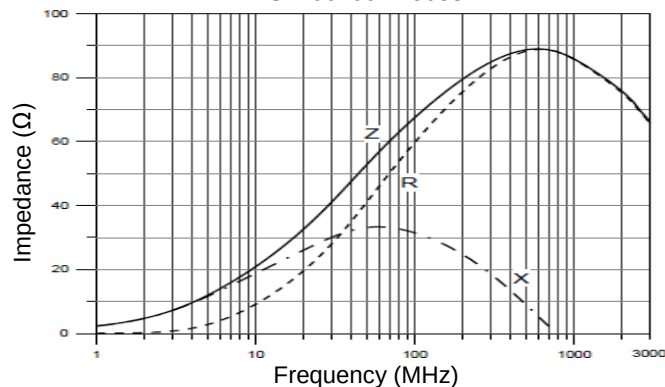


SIM06101YA4538

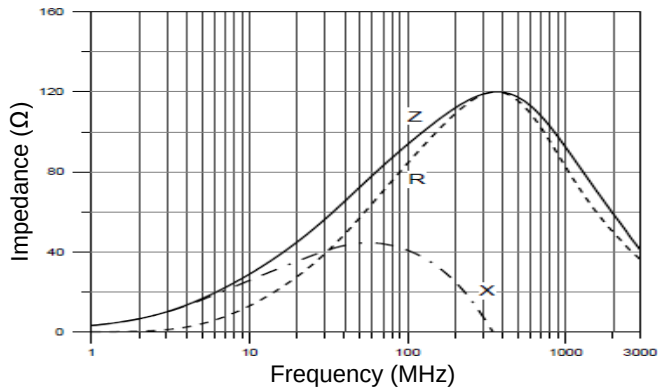


SIM06121YA4538

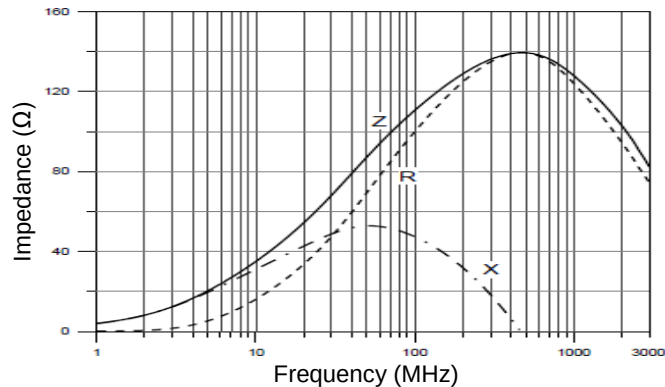

SIM06151YA4538

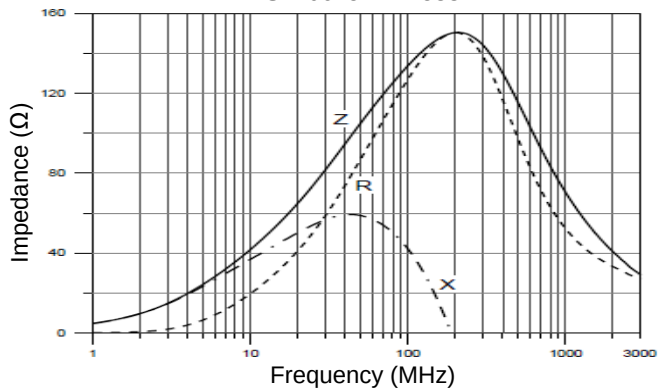


SIM06301YA3538

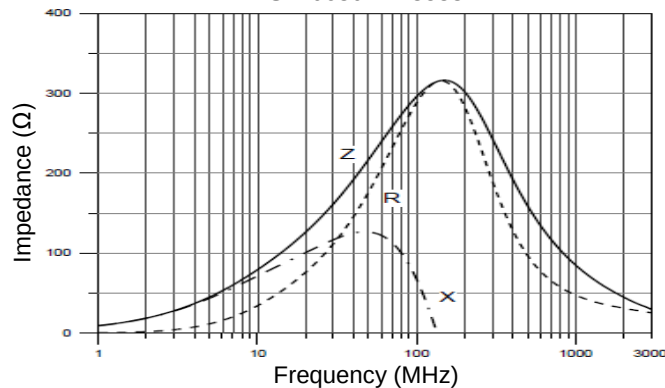


CHARICTERISTIC CURVES


SIM06601YA3538

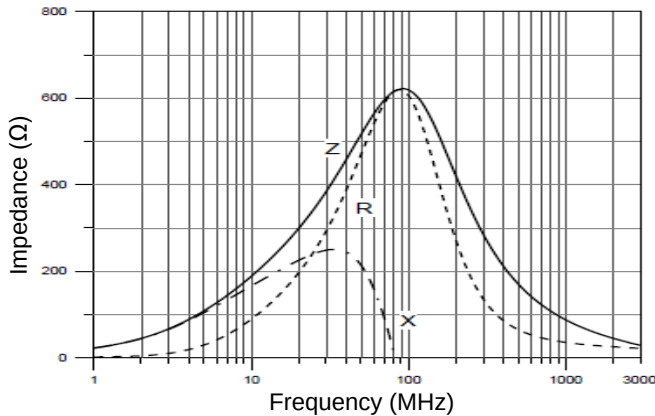


SIM06102YA3538

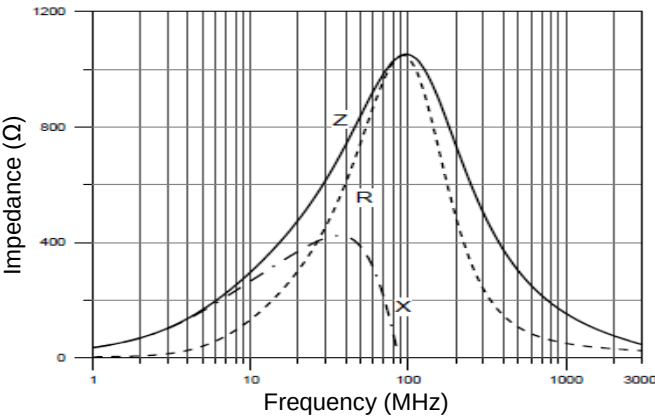

SIM06102YA20B38

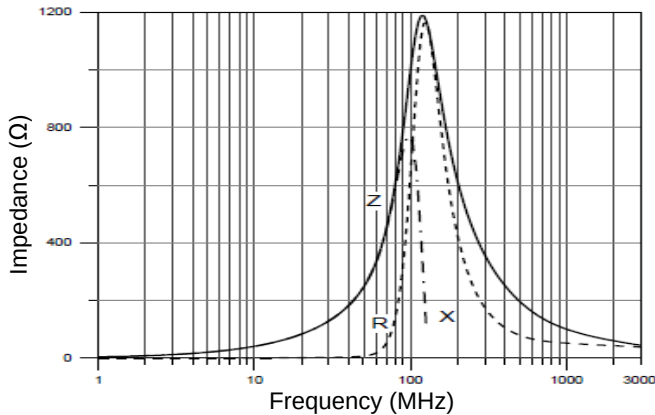

SIM06202YA20B38

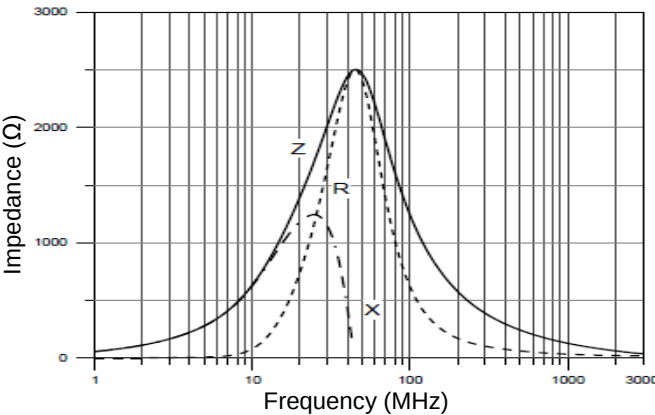

Chip Ferrite Bead General Type

SIM06-38 series


MERITEK

RELIABILITY TEST CONDITON AND REQUIREMENT

Item	Test Conditions	Requirement															
Solderability	Solder: Sn-3Ag-0.5Cu, Solder temperature: 240±5°C, Depth: completely cover the termination. Dip time: 3±1sec.	More than 95% of coverage															
Resistance to Soldering Heat	Solder temperature: 265±3°C for 6±1 seconds; Preheating: 100°C ~ 150°C for 1 min. Solder: Sn-3Ag-0.5Cu	Appearance: No damage. Electrical and Mechanical Characteristics shall be satisfied															
Vibration	Oscillation Frequency: 10~2K~10 Hz, Direction: X, Y, X Testing Time: 12 hours (4 hours, 3 orientations)	Appearance: No damage. Impedance: within ±30% of initial value															
Shock	Test condition: <table><tr><td>Type</td><td>Peak Value (g's)</td><td>Normal duration (ms)</td><td>Wave From</td><td>Velocity change (ft/sec)</td></tr><tr><td>SMD</td><td>100</td><td>6</td><td>Half-sine</td><td>12.3</td></tr><tr><td>Lead</td><td>100</td><td>6</td><td>Half-sine</td><td>12.3</td></tr></table>	Type	Peak Value (g's)	Normal duration (ms)	Wave From	Velocity change (ft/sec)	SMD	100	6	Half-sine	12.3	Lead	100	6	Half-sine	12.3	Appearance: No damage. Impedance: within ±30% of initial value
Type	Peak Value (g's)	Normal duration (ms)	Wave From	Velocity change (ft/sec)													
SMD	100	6	Half-sine	12.3													
Lead	100	6	Half-sine	12.3													
Terminal strength	With component mounted on a PCB apply a force 10N to the side of a device being tested. This force shall be applied for 10 +1 seconds. Also, the force shall be applied gradually as not to shock the component being tested.	Appearance: no damage.															
Thermal Shock	Number of cycles: 1000. Condition for 1 cycle: <table><tr><td>No.</td><td>Temp. (°C)</td><td>Time (min.)</td></tr><tr><td>1</td><td>-55±5°C</td><td>30±3</td></tr><tr><td>2</td><td>Room Temp.</td><td>2 ~ 5</td></tr><tr><td>3</td><td>+125±2°C</td><td>30±3</td></tr><tr><td>4</td><td>Room Temp.</td><td>2 ~ 5</td></tr></table> Measured at room temperature after placing for 24±2 hrs.	No.	Temp. (°C)	Time (min.)	1	-55±5°C	30±3	2	Room Temp.	2 ~ 5	3	+125±2°C	30±3	4	Room Temp.	2 ~ 5	Appearance: No damage. Impedance: within ±30% of initial value
No.	Temp. (°C)	Time (min.)															
1	-55±5°C	30±3															
2	Room Temp.	2 ~ 5															
3	+125±2°C	30±3															
4	Room Temp.	2 ~ 5															
Bending	Device mounted on a test substrate, bend the substrate by 3mm, hold for 10sec and then return.	Appearance: The terminal electrode and the ferrite must not be damaged.															
Load Humidity	Humidity: 85±2%R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current. Measured at room temperature after 24±2 hrs.	Appearance: No damage. Impedance: within ±30% of initial value															
Life Test	Temperature: 125±2°C, Duration: 1000±12 Hrs. Measured at room temperature after 24±2 Hrs.	Appearance: No damage. Impedance: within ±30% of initial value															

RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min T _{s(min)}	120°C
	Temp. Max T _{s(max)}	180°C
	Time (min. to max.) (t _s)	50 ~150 seconds
Reflow	Temp. (T _L)	230°C
	Time (min. to max.) (t _L)	90 ~120 seconds
Peak Temperature (T _P)		260°C
Time within 5°C of actual peak Temperature (t _p)		10 seconds max.
Reflow times:		3 times Max.

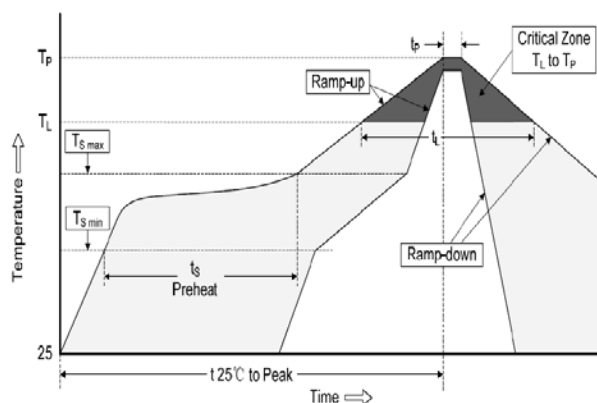

*Specifications subject to change without notice.