


Molded Power Inductor High Current Shielded Type

PIM-1004A1 series

MERITEK

FEATURE

- High Current, Low DCR, High Efficiency
- Minimized Acoustic and Leakage Flux Noise
- Shielded and Compact Construction Design
- Application: Notebook, PC, Servers, DC/DC Converter, High current converter, Battery powered devices

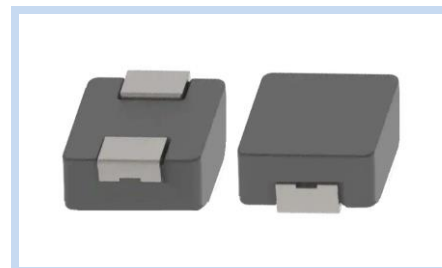

ELECTRICAL CHARACTERISTICS

Item	Inductance (μH)	Tolerance (%)	DCR Typ. (mΩ)	DCR Max. (mΩ)	IsAT Typ. (A)	I _{RMS} Typ. (A)
PIMR15N1004A1	0.15	±30%	0.5	0.6	75.0	43.0
PIMR22M1004A1	0.22	±20%	0.8	1.0	60.0	35.0
PIMR33M1004A1	0.33	±20%	1.0	1.2	60.0	31.0
PIMR36M1004A1	0.36	±20%	1.05	1.2	60.0	31.0
PIMR47M1004A1	0.47	±20%	1.3	1.5	43.0	28.0
PIMR56M1004A1	0.56	±20%	1.6	1.8	40.0	25.0
PIMR68M1004A1	0.68	±20%	2.4	2.7	39.0	22.0
PIM1R0M1004A1	1.0	±20%	3.0	3.3	36.0	18.0
PIM1R5M1004A1	1.5	±20%	4.0	4.6	33.0	16.0
PIM2R2M1004A1	2.2	±20%	6.5	7.0	27.0	12.0
PIM3R3M1004A1	3.3	±20%	10.8	11.8	20.0	11.0
PIM4R7M1004A1	4.7	±20%	15.0	15.5	17.0	10.0
PIM5R6M1004A1	5.6	±20%	17.0	19.3	14.0	9.0
PIM6R8M1004A1	6.8	±20%	17.5	23.3	13.5	8.5
PIM8R2M1004A1	8.2	±20%	20.0	22.5	12.5	8.0
PIM100M1004A1	10	±20%	27.0	30.0	12.0	7.5
PIM150M1004A1	15	±20%	40.0	45.0	10.0	6.25
PIM220M1004A1	22	±20%	64.0	74.0	7.0	5.0
PIM330M1004A1	33	±20%	92.0	112	5.0	3.5
PIM470M1004A1	47	±20%	145	167	4.5	3.0

Note:


1. Inductance test under 100KRz, 1.0V
2. All test data referenced to 25°C ambient

3. IsAT based on inductance drop ($\Delta L/L_0 \leq 30\%$) approximately

4. I_{RMS} based on temperature rise ($\Delta T: 40^\circ\text{C}$) approximately

5. Operating temperature: $-40^\circ\text{C} \sim +125^\circ\text{C}$ (Including Self-temperature rise)

DIMENSIONS

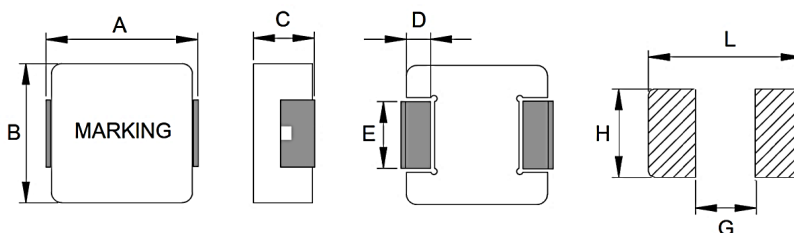

(Unit: mm)


Size Code	A	B	C	D	E	L	G	R
1004	11.0±0.50	10.0±0.30	3.8±0.2	2.3±0.30	3.0±0.30	13.6	5.4	3.5

Molded Power Inductor High Current Shielded Type

PIM-1004A1 series

MERITEK

CHARACTERISTIC CURVES

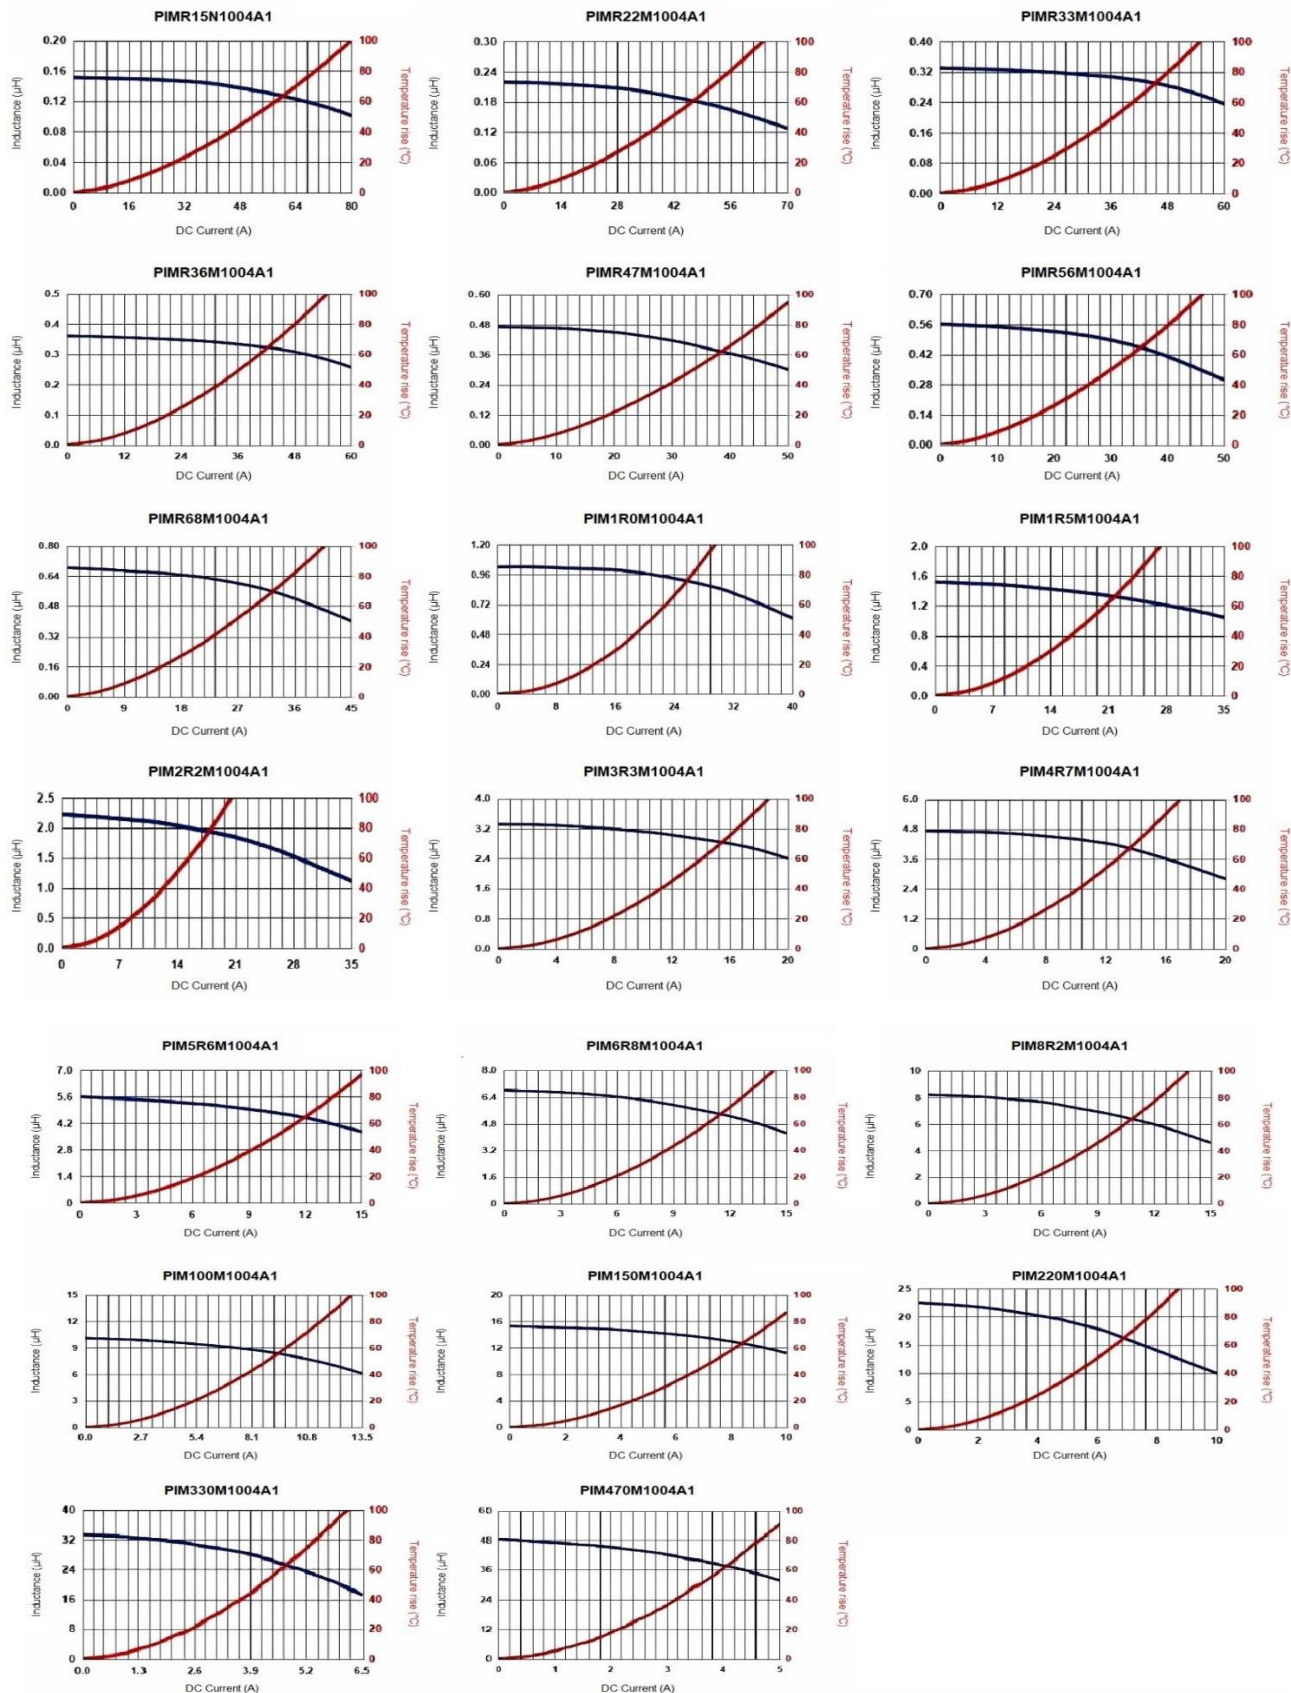


Molded Power Inductor High Current Shielded Type

PIM-1004A1 series

MERITEK

DIMENSIONS – PIM-A1 series

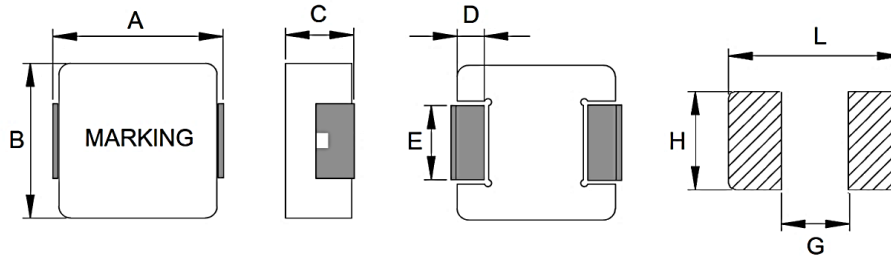

(Unit: mm)

Size Code	A	B	C	D	E	L	G	H
0302	3.5±0.20	3.2±0.20	1.8±0.2	0.7±0.20	1.2±0.20	4.1	1.9	1.45
0312	3.5±0.20	3.2±0.20	1.0±0.2	0.7±0.20	1.2±0.20	4.1	1.9	1.45
0315	3.5±0.20	3.2±0.20	1.3±0.2	0.7±0.20	1.2±0.20	4.1	1.9	1.45
0402	4.45±0.25	4.06±0.25	1.8±0.2	0.76±0.30	2.0±0.20	5.2	2.2	2.4
0412	4.45±0.25	4.06±0.25	1.0±0.2	0.76±0.30	2.0±0.20	5.2	2.2	2.4
0415	4.45±0.25	4.06±0.25	1.3±0.2	0.76±0.30	2.0±0.20	5.2	2.2	2.4
0502	5.7±0.30	5.2±0.20	1.8±0.2	1.1±0.30	2.5±0.30	6.2	2.2	2.8
0503	5.7±0.30	5.2±0.20	2.8±0.2	1.1±0.30	1.5±0.20	6.2	2.5	1.8
0512	5.7±0.30	5.2±0.20	1.0±0.2	1.1±0.30	2.5±0.30	6.2	2.2	2.8
0515	5.7±0.30	5.2±0.20	1.3±0.2	1.1±0.30	2.5±0.30	6.2	2.2	2.8
0518	5.7±0.30	5.2±0.20	1.6±0.2	1.1±0.30	2.5±0.30	6.2	2.2	2.8
053P	5.7±0.30	5.2±0.20	2.8±0.2	1.1±0.30	2.5±0.30	6.5	2.5	2.8
053T	4.9±0.30	4.7±0.20	2.8±0.2	1.0±0.30	1.5±0.30	7.0	3.0	2.5
0612	7.0±0.30	6.6±0.30	1.0±0.2	1.8±0.30	2.5±0.30	7.7	2.5	3.0
0615	7.0±0.30	6.6±0.30	1.3±0.2	1.8±0.30	3.0±0.30	7.7	2.5	3.5
0618	7.0±0.30	6.6±0.30	1.6±0.2	1.8±0.30	3.0±0.30	7.7	2.5	3.5
0602	7.0±0.30	6.6±0.30	1.8±0.2	1.8±0.30	3.0±0.30	7.7	2.5	3.5
0624	7.3±0.30	6.6±0.30	2.2±0.2	1.8±0.30	3.0±0.30	7.7	2.5	3.5
0603	7.3±0.30	6.6±0.30	2.8±0.2	1.8±0.30	3.0±0.30	8.4	2.5	3.5
0604	7.3±0.30	6.6±0.30	3.8±0.2	1.8±0.30	3.0±0.30	8.4	2.5	3.5
0605	7.3±0.30	6.6±0.30	4.8±0.2	1.8±0.30	3.0±0.30	8.4	2.5	3.5
0803	8.8±0.40	8.4±0.30	2.8±0.2	1.6±0.30	5.0±0.30	9.6	4.5	5.5
0840	8.8±0.40	8.4±0.30	3.8±0.2	1.6±0.30	5.0±0.30	9.6	4.5	5.5
1002	11.0±0.50	10.0±0.30	1.8±0.2	2.3±0.30	3.0±0.30	12.5	5.4	3.5
1003	11.0±0.50	10.0±0.30	2.8±0.2	2.3±0.30	3.0±0.30	13.6	5.4	3.5
1004	11.0±0.50	10.0±0.30	3.8±0.2	2.3±0.30	3.0±0.30	13.6	5.4	3.5
1005	11.0±0.50	10.0±0.30	4.8±0.2	2.3±0.30	3.0±0.30	13.6	5.4	3.5
1235	13.5±0.50	12.5±0.30	3.3±0.2	2.3±0.30	4.7±0.30	14.2	8.0	5.0
1205	13.5±0.50	12.5±0.30	4.8±0.2	2.3±0.30	4.7±0.30	14.2	8.0	5.0
1206	13.5±0.50	12.5±0.30	5.7±0.2	2.3±0.30	4.7±0.30	14.2	8.0	5.0
1265	13.5±0.50	12.5±0.30	6.2±0.3	2.3±0.30	4.7±0.30	14.2	8.0	5.0
1707	18.0 max	16.9±0.30	6.7±0.3	2.1±0.30	11.9±0.30	18.5	12.2	12.5


Molded Power Inductor High Current Shielded Type

PIM-1004A1 series

MERITEK

RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{s(min)}$	150°C
	Temp. Max $T_{s(max)}$	200°C
	Time (min. to max.) (t_s)	60~120 seconds
Average ramp up rate $T_{s(max)}$ to T_L		3°C/second max.
Average ramp up rate T_L to peak		3°C/second max.
Reflow	Temp. (T_L)	217°C
	Time (min. to max.) (t_L)	60~150 seconds
Peak Temperature (T_P)		245°C
Time within 5°C of actual peak Temperature (t_p)		10 seconds
Ramp-down Rate		6°C/second max.
Reflow Times		3 times max.

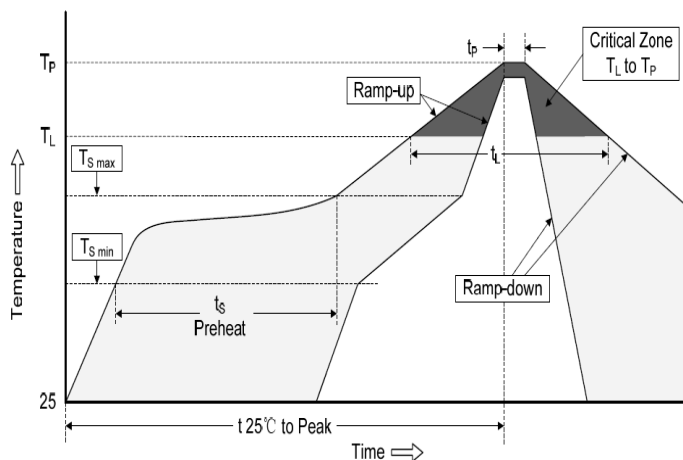

PART NUMBERING SYSTEM

PIM (1) **1R0** (2) **M** (3) **1004** (4) **A1** (5)

No	Item	Code	Description
(1)	Product Code	PIM	Power Inductor Series, Molded Surface Mount Type
(2)	Inductance	1R0	1R0: 1.0μH R47: 0.47μH, 2R2: 2.2μH, 100: 10μH
(3)	Tolerance	M	M: ±20% N: ±30%
(4)	Size Code	1004	1004: 11.0x3.8mm Width x Height (mm)
(5)	Series Code	A1	High Current Molded Type

*Specifications subject to change without notice.