

Gas Discharge Tube

5.0x5.0mm 2 Poles Square End

MGT5-2ST series

MERITEK

FEATURE

- Storage and operating temperature: -40°C ~ +85°C
- Micro-Gap Design
- Stable Breakdown Voltage
- High Holdover Voltage, High Insulation Resistance
- Low capacitance ($\leq 1.0\text{pF}$)
- Large Transient Current Absorbing Capability
- Meets MSL Level 1, per J-STD-020
- UL Safety Approved Certification No: E223045



PART NUMBERING SYSTEM



MGT 5 L 090M CB2ST
 (1) (2) (3) (4) (5)

No	Item	Digit	Description	
(1)	Product Code	MGT	MGT: Gas Discharge Tube series	
(2)	Size Code	5	Diameter: 5mm	DxT :5.0x5.0mm
(3)	Discharge Current	L	L: 5KA	8/20 μ s, 10times
(4)	Breakage Voltage Tolerance	090M	090: 90 \pm 20%	DC Spark Over Voltage, 100V/s
(5)	Series Code	CB2ST	2 Poles, Square End	Internal Control Reference

ELECTRICAL CHARACTERISTICS

Part Number	DC Spark-over Voltage	Impulse Spark-over Voltage	Impulse Discharge Current	Alternating Discharge Current	Impulse Life	Minimum Insulation Resistance		Maximum Capacitance
	100V/s	1KV/ μ s	8/20 μ s, 10times	50Hz 1sec	10/1K μ s 100A	VT	IR	1MHz 1V
5.0x5.0mm	(V)	(V)	(KA)	(A)	(Times)	(V _{DC})	(G Ω)	(pF)
MGT5L090MCB2ST	90 \pm 20%	650	5	5	300	50	1	1
MGT5L150MCB2ST	150 \pm 20%	700	5	5	300	100	1	1
MGT5L230MCB2ST	230 \pm 20%	700	5	5	300	100	1	1
MGT5L250MCB2ST	250 \pm 20%	700	5	5	300	100	1	1
MGT5L300MCB2ST	300 \pm 20%	900	5	5	300	100	1	1
MGT5L350MCB2ST	350 \pm 20%	900	5	5	300	100	1	1
MGT5L400MCB2ST	400 \pm 20%	1000	5	5	300	100	1	1
MGT5L470MCB2ST	470 \pm 20%	1100	5	5	300	250	1	1


Gas Discharge Tube

5.0x5.0mm 2 Poles Square End

MGT5-2ST series

MERITEK

DIMENSIONS AND RECOMMENDATION PAD

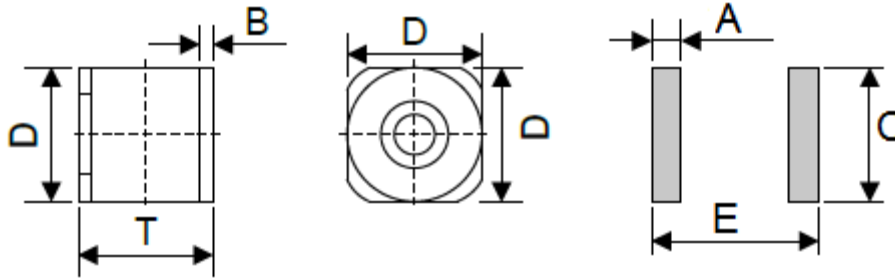

Part Number	D	T	B	E	A	C
MGT5-2ST	5.0±0.2	5.0±0.3	0.5±0.1	5.6	1.1	5.0

Unit: mm

RELIABILITY AND TEST CONDITON

Item	Test Condition	Requirement
DC Spark-over Voltage	The voltage is measured with voltage ramp $dv/dt = 100V/s$.	To meet the specified value
Maximum Impulse Spark-over Voltage	The voltage is measured with voltage ramp $dv/dt = 1000V/\mu s$.	
Impulse Discharge Current	<p>Maximum 8/20 μs surge current that can be applied between two electrodes, 5 positive and 5 negative surges, with 3 minutes interval time, without causing the DC spark-over voltage to change more than 25% from its initial measured value.</p> <p style="text-align: center;">Crest Value</p>	To meet the specified value
Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 second for 10 times with interval time 3 minutes. DC spark-over voltage shall not be change more than $\pm 25\%$ from its initial value. $IR > 10^8 \Omega$ (-20%, +30% for 70~90V).	To meet the specified value
Insulation Resistance	The resistance of gas tube shall be measured between two electrodes.	To meet the specified value
Capacitance	The capacitance of gas tube shall be measured between two electrodes.	

Gas Discharge Tube


5.0x5.0mm 2 Poles Square End

MGT5-2ST series


MERITEK

RECOMMENDED SOLDERING PROFILES

Reflow Soldering Condition		
Pre Heat	Temp. Min $T_{s(min)}$	150°C
	Temp. Max $T_{s(max)}$	200°C
	Time (min. to max.) (t_s)	60~180 sec
Average ramp up rate (T_L) to peak		3°C/sec Max.
$T_{s(max)}$ to T_L (Ramp-up rate)		3°C/sec Max.
Reflow	Temp. (T_L)	217°C
	Time (min. to max.) (t_L)	60~150 sec
Peak Temperature (T_P)		260°C
Time within 5°C of Peak Temp (t_p)		20-40 sec
Ramp-down Rate		6°C/sec Max.
Time (25°C to Peak Temp)		8 mins Max.

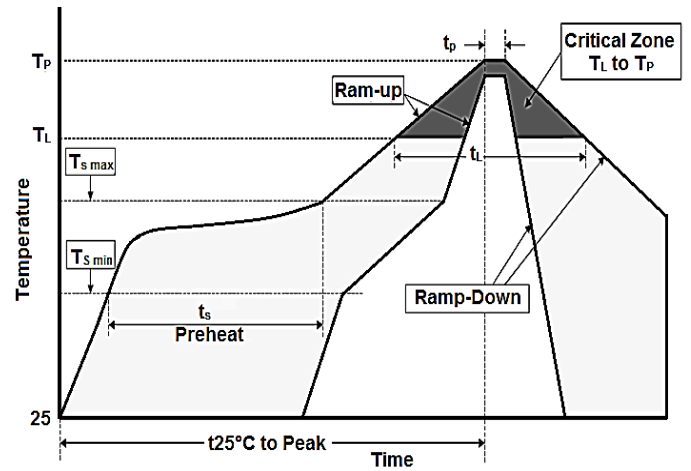

PACKAGING SPECIFICATION

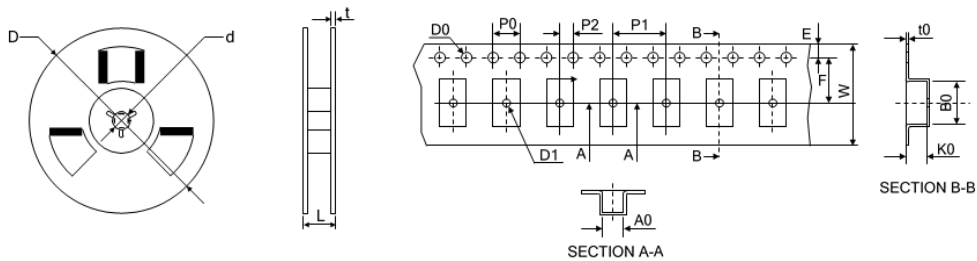

Item	D	d	L	t	W	P0	P1	P2	D0	E	F	A0	K0	B0	t0	Pcs/Reel
Size	330	13	20	2	12	4	8	2	1.55	1.75	5.5	5.4	5.4	5.4	0.4	800

Unit: mm

*Specifications subject to change without notice.