


# Molded Power Inductor High Current Shielded Type

PIM-0624A1 series

**MERITEK**

## FEATURE

- High Current, Low DCR, High Efficiency
- Minimized acoustic and leakage flux noise.
- Shielded and compact construction design
- Application: Notebook, PC, Servers, DC/DC Converter, High current converter, Battery powered devices

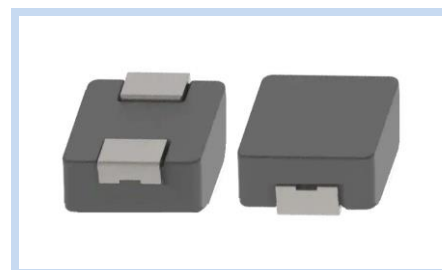

## ELECTRICAL CHARACTERISTICS

Item	Inductance (μH)	Tolerance (%)	DCR Typ. (mΩ)	DCR Max. (mΩ)	I <sub>SAT</sub> Typ. (A)	I <sub>RMS</sub> Typ. (A)
PIMR10N0624A1	0.10	±30%	1.4	1.7	70.0	30.0
PIMR15N0624A1	0.15	±30%	1.8	2.3	45.0	30.0
PIMR22M0624A1	0.22	±20%	2.0	3.2	34.0	21.0
PIMR33M0624A1	0.33	±20%	3.6	4.4	30.0	18.0
PIMR36M0624A1	0.36	±20%	3.8	4.6	29.0	17.0
PIMR47M0624A1	0.47	±20%	4.8	5.1	26.0	15.0
PIMR56M0624A1	0.56	±20%	5.5	6.5	24.0	13.0
PIMR68M0624A1	0.68	±20%	6.4	7.2	21.0	13.0
PIMR82M0624A1	0.82	±20%	8.0	9.5	17.0	11.0
PIM1R0M0624A1	1.0	±20%	10.5	13.5	16.0	11.0
PIM1R5M0624A1	1.5	±20%	17.0	20.0	15.0	9.0
PIM2R2M0624A1	2.2	±20%	23.0	28.0	14.0	7.0
PIM3R3M0624A1	3.3	±20%	34.0	39.0	10.0	6.0
PIM4R7M0624A1	4.7	±20%	41.0	50.0	9.0	5.5
PIM5R6M0624A1	5.6	±20%	56.0	62.0	8.0	5.0
PIM6R8M0624A1	6.8	±20%	65.0	72.0	7.0	4.0
PIM8R2M0624A1	8.2	±20%	81.0	95.0	6.0	3.6
PIM100M0624A1	10	±20%	92.0	101	5.0	3.2
PIM150M0624A1	15	±20%	150	180	3.5	2.5
PIM220M0624A1	22	±20%	185	215	3.0	1.8

Note:


1. Inductance test under 100KHz, 1.0V
2. All test data referenced to 25°C ambient
3. I<sub>SAT</sub> based on inductance drop ( $\Delta L/L_0 \leq 30\%$ ) approximately
4. I<sub>RMS</sub> based on temperature rise ( $\Delta T: 40^\circ\text{C}$ ) approximately
5. Operating temperature: -40°C ~ +125°C (Including Self-temperature rise)

# Molded Power Inductor High Current Shielded Type

PIM-0624A1 series

**MERITEK**


## DIMENSIONS

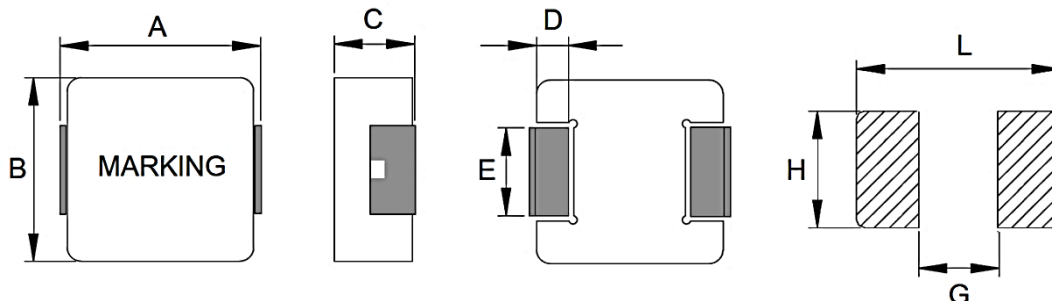

(Unit: mm)

Size Code	A	B	C	D	E	L	G	H
0624	7.3±0.30	6.6±0.30	2.2±0.2	1.8±0.30	3.0±0.30	7.7	2.5	3.5

## CHARACTERISTIC CURVES

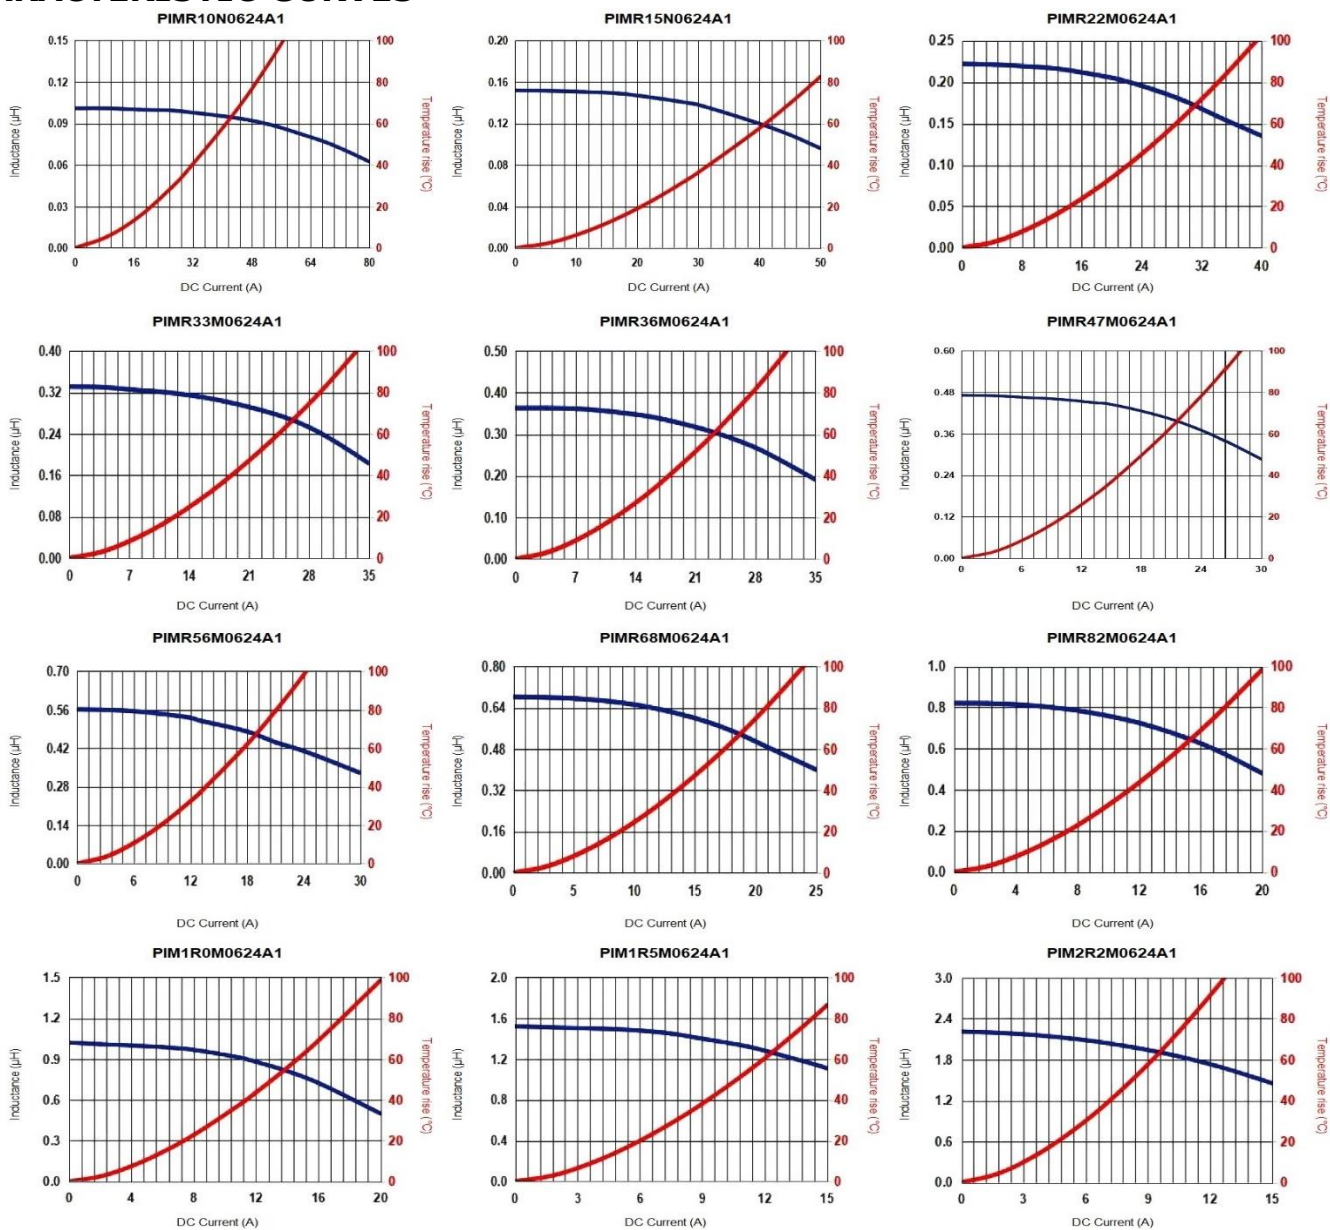


# Molded Power Inductor High Current Shielded Type

PIM-0624A1 series


**MERITEK**

## CHARACTERISTIC CURVES

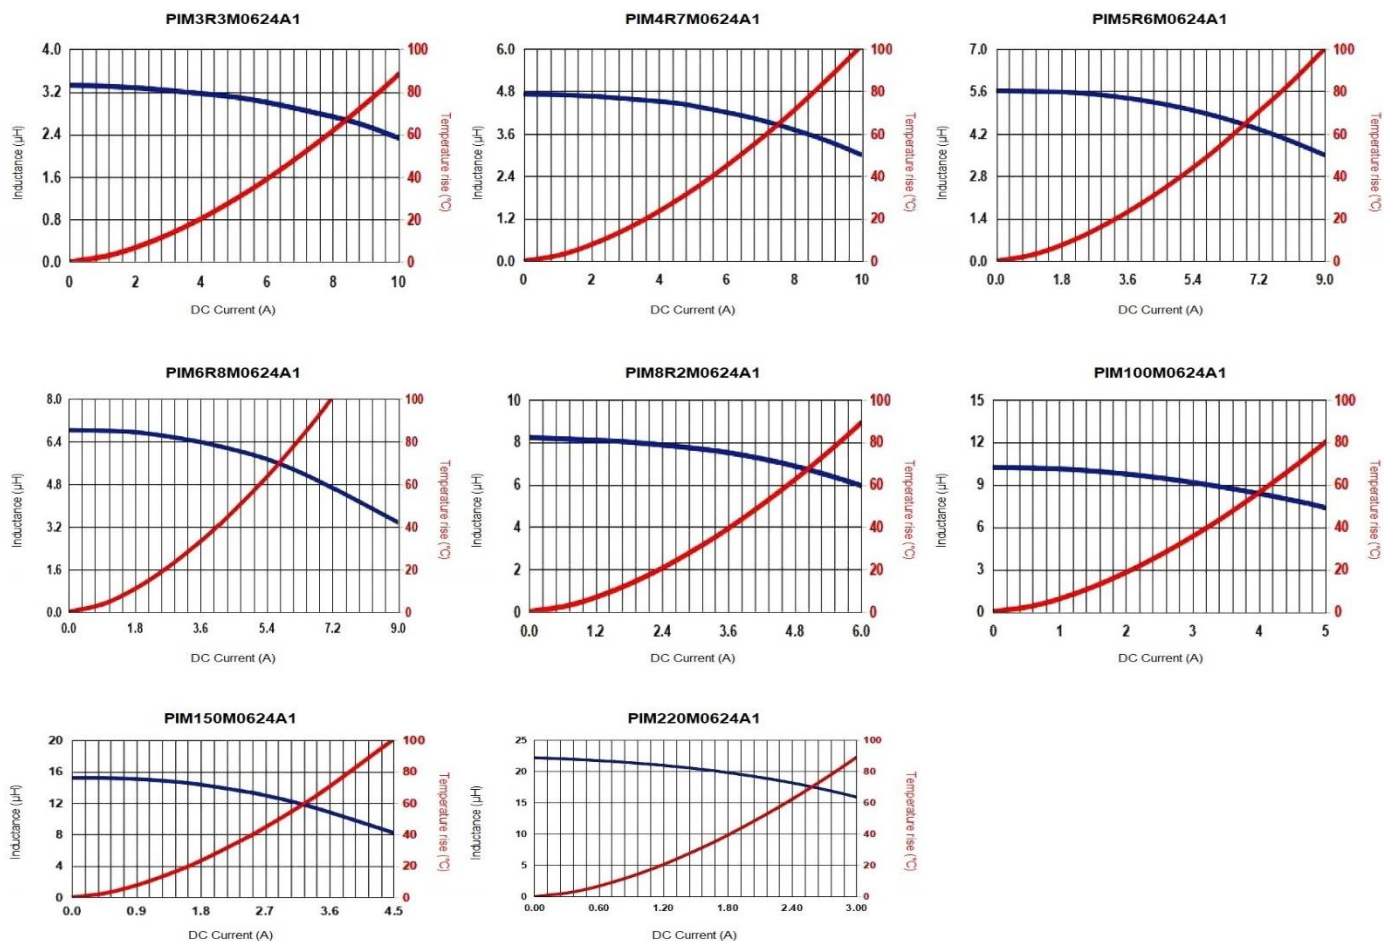

## RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{S(min)}$	150°C
	Temp. Max $T_{S(max)}$	200°C
	Time (min. to max.) ( $t_s$ )	60~120 seconds
Average ramp up rate $T_{S(max)}$ to $T_L$		3°C/second max.
Average ramp up rate $T_L$ to peak		3°C/second max.
Reflow	Temp. ( $T_L$ )	217°C
	Time (min. to max.) ( $t_L$ )	60~150 seconds
Peak Temperature ( $T_P$ )		245°C
Time within 5°C of actual peak Temperature ( $t_p$ )		10 seconds
Ramp-down Rate		6°C/second max.
Reflow Times		3 times max.

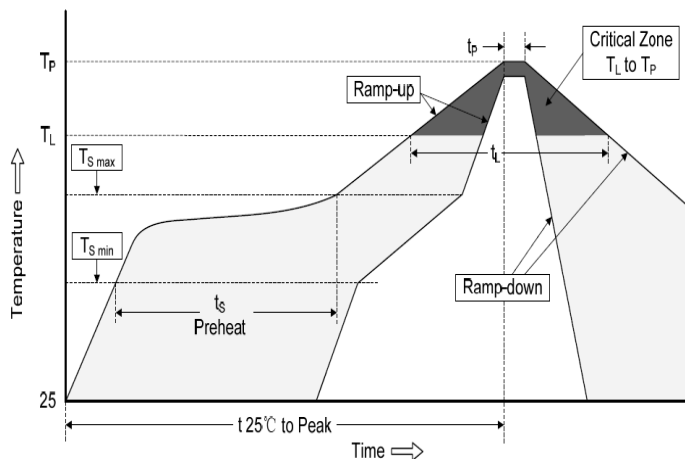

# Molded Power Inductor High Current Shielded Type

PIM-0624A1 series


**MERITEK**

## PART NUMBERING SYSTEM

**PIM** (1)    **1R0** (2)    **M** (3)    **0624** (4)    **A1** (5)

No	item	Code	Description	
(1)	<b>Product Code</b>	PIM	Power Inductor Series, Molded Surface Mount Type	
(2)	<b>Inductance</b>	1R0	1R0: 1.0 $\mu$ H	R47: 0.47 $\mu$ H, 2R2: 2.2 $\mu$ H, 100: 10 $\mu$ H
(3)	<b>Tolerance</b>	M	M: $\pm$ 20%	N: $\pm$ 30%
(4)	<b>Size Code</b>	0624	0624: 7.3x2.2mm	Width x Height (mm)
(5)	<b>Series Code</b>	A1	High Current Molded Type	Internal control or project reference

## DIMENSIONS – PIM-A1 series

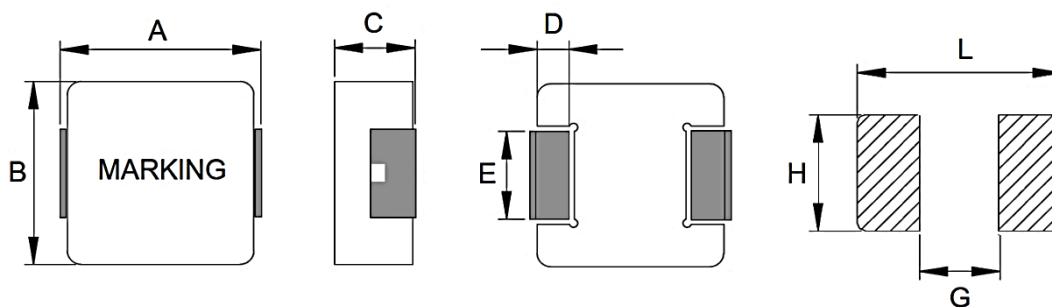

(Unit: mm)


Size Code	A	B	C	D	E	L	G	H
0612	7.0 $\pm$ 0.30	6.6 $\pm$ 0.30	1.0 $\pm$ 0.2	1.8 $\pm$ 0.30	2.5 $\pm$ 0.30	7.7	2.5	3.0
0615	7.0 $\pm$ 0.30	6.6 $\pm$ 0.30	1.3 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	7.7	2.5	3.5
0618	7.0 $\pm$ 0.30	6.6 $\pm$ 0.30	1.6 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	7.7	2.5	3.5
0620	7.0 $\pm$ 0.30	6.6 $\pm$ 0.30	1.8 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	7.7	2.5	3.5
0624	7.3 $\pm$ 0.30	6.6 $\pm$ 0.30	2.2 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	7.7	2.5	3.5
0630	7.3 $\pm$ 0.30	6.6 $\pm$ 0.30	2.8 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	8.4	2.5	3.5
0640	7.3 $\pm$ 0.30	6.6 $\pm$ 0.30	3.8 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	8.4	2.5	3.5
0650	7.3 $\pm$ 0.30	6.6 $\pm$ 0.30	4.8 $\pm$ 0.2	1.8 $\pm$ 0.30	3.0 $\pm$ 0.30	8.4	2.5	3.5
0830	8.8 $\pm$ 0.40	8.4 $\pm$ 0.30	2.8 $\pm$ 0.2	1.6 $\pm$ 0.30	5.0 $\pm$ 0.30	9.6	4.5	5.5
0840	8.8 $\pm$ 0.40	8.4 $\pm$ 0.30	3.8 $\pm$ 0.2	1.6 $\pm$ 0.30	5.0 $\pm$ 0.30	9.6	4.5	5.5
1020	11.0 $\pm$ 0.50	10.0 $\pm$ 0.30	1.8 $\pm$ 0.2	2.3 $\pm$ 0.30	3.0 $\pm$ 0.30	12.5	5.4	3.5
1030	11.0 $\pm$ 0.50	10.0 $\pm$ 0.30	2.8 $\pm$ 0.2	2.3 $\pm$ 0.30	3.0 $\pm$ 0.30	13.6	5.4	3.5
1040	11.0 $\pm$ 0.50	10.0 $\pm$ 0.30	3.8 $\pm$ 0.2	2.3 $\pm$ 0.30	3.0 $\pm$ 0.30	13.6	5.4	3.5
1050	11.0 $\pm$ 0.50	10.0 $\pm$ 0.30	4.8 $\pm$ 0.2	2.3 $\pm$ 0.30	3.0 $\pm$ 0.30	13.6	5.4	3.5
1235	13.5 $\pm$ 0.50	12.5 $\pm$ 0.30	3.3 $\pm$ 0.2	2.3 $\pm$ 0.30	4.7 $\pm$ 0.30	14.2	8.0	5.0
1250	13.5 $\pm$ 0.50	12.5 $\pm$ 0.30	4.8 $\pm$ 0.2	2.3 $\pm$ 0.30	4.7 $\pm$ 0.30	14.2	8.0	5.0
1260	13.5 $\pm$ 0.50	12.5 $\pm$ 0.30	5.7 $\pm$ 0.2	2.3 $\pm$ 0.30	4.7 $\pm$ 0.30	14.2	8.0	5.0
1265	13.5 $\pm$ 0.50	12.5 $\pm$ 0.30	6.2 $\pm$ 0.3	2.3 $\pm$ 0.30	4.7 $\pm$ 0.30	14.2	8.0	5.0
1770	18.0 max	16.9 $\pm$ 0.30	6.7 $\pm$ 0.3	2.1 $\pm$ 0.30	11.9 $\pm$ 0.30	18.5	12.2	12.5

# Molded Power Inductor High Current Shielded Type

PIM-0624A1 series

**MERITEK**

## PACKAGING DIMENSION – PIM-A1 series

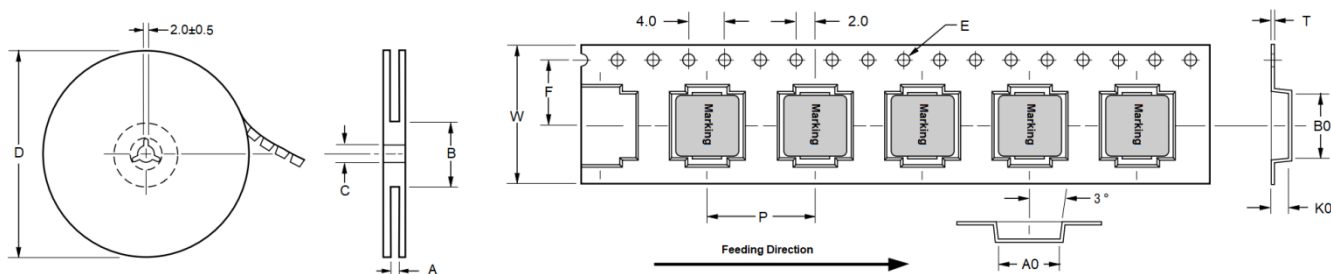

Size Code	Reel Dimension (mm)				Tape Dimensions (mm)								Qty 13"
	A +2/-0	B ±2.0	C ±0.5	D	W ±0.3	F ±0.1	P ±0.1	E ±0.1	A0 ±0.1	B0 ±0.1	K0 ±0.1	T ±0.05	
0612	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	1.5	0.35	3000
0615	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	1.8	0.35	2000
0618	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	2.1	0.35	2000
0620	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	2.3	0.35	1500
0624	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	2.7	0.35	1500
0630	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	3.3	0.35	1000
0640	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	4.3	0.35	1000
0650	16.4	100	13.5	330	16.0	7.5	12.0	1.5	7.0	7.7	5.3	0.35	800
0830	24.4	100	13.5	330	24.0	11.5	16.0	1.5	8.9	10.1	3.3	0.35	1000
0840	24.4	100	13.5	330	24.0	11.5	16.0	1.5	8.9	10.1	4.5	0.35	800
1020	24.4	100	13.5	330	24.0	11.5	16.0	1.5	8.9	10.1	2.3	0.35	500
1030	24.4	100	13.5	330	24.0	11.5	16.0	1.5	8.9	10.1	3.3	0.35	500
1040	24.4	100	13.5	330	24.0	11.5	16.0	1.5	10.4	11.6	4.5	0.35	500
1050	24.4	100	13.5	330	24.0	11.5	16.0	1.5	10.4	11.6	5.3	0.35	500
1235	24.4	100	13.5	330	24.0	11.5	16.0	1.5	12.9	14.1	4.0	0.35	500
1250	24.4	100	13.5	330	24.0	11.5	16.0	1.5	12.9	14.1	5.5	0.35	500
1260	24.4	100	13.5	330	24.0	11.5	16.0	1.5	12.9	14.1	6.5	0.35	500
1265	24.4	100	13.5	330	24.0	11.5	16.0	1.5	13.0	14.2	7.0	0.35	500
1770	32.4	100	13.5	330	32.0	14.2	24.0	1.5	17.5	18.5	7.5	0.50	200

\*Specifications subject to change without notice.