

Aluminum Electrolytic Capacitors

Surface Mount Non-Polar

AEC-Q200

SHB-A series

MERITEK

FEATURE

- Non-Polar Series
- AEC-Q200 Compliant
- Applications: Non-Polarized, Low Profile Vertical Chip
- Load life at 105°C

Diameter (mm)	Load Life (Hours)
4.0 ~ 6.3	2000



RoHS

SPECIFICATIONS

Item	Characteristic										
Operating Temperature	-55 ~ 105°C										
Rated Working Voltage	6.3 ~ 50VDC										
Nominal Capacitance	1 ~ 47µF, ±20% (at 20°C, 120HZ)										
Leakage Current	$I_L \leq 0.05CV$ or $10\mu A$ whichever is greater after 2 minutes at 20°C I_L : Leakage Current (μA) C: Nominal Capacitance (μF) V: Rated Voltage (V)										
Ripple Current Coefficient, Frequency	Frequency (Hz)	60	120	1K	10K	--	--				
Dissipation Factor at 20°C, 120Hz	Coefficient	0.85	1.00	1.10	1.20	--	--				
Low Temperature Stability, Impedance Ratio at 120Hz	Working Voltage	6.3	10	16	25	35	50				
Load Life	Dissipation Factor	0.26	0.22	0.20	0.20	0.20	0.18				
Shelf Life	Working Voltage	6.3	10	25	35	50	--				
Resistance to Soldering Heat	Z-25°C / Z+20°C	4	3	2	2	2	--				
	Z-40°C / Z+20°C	8	6	4	3	3	--				
	Capacitance	$\leq \pm 20\%$ of initial value		Apply Working Voltage for Rated Load Life / Temperature Stabilized at +20°C.							
	Dissipation Factor	$\leq 200\%$ of initial value									
	Leakage Current	\leq Initial specified value									
	Capacitance	$\leq \pm 20\%$ of initial value		After storage condition without voltage applied for 1000 hours at Rated Temperature, Stabilizing for 1 to 2 hours.							
	Dissipation Factor	$\leq 200\%$ of initial value									
	Leakage Current	\leq Initial specified value									
	Capacitance	$\leq \pm 20\%$ of initial value		For other procedures than those specified, Soldering iron method: Temperature: $260 \pm 5^\circ C$. Application time of soldering iron: 10 sec							
	Dissipation Factor	\leq specified value									
	Leakage Current	\leq specified value									

Aluminum Electrolytic Capacitors

Surface Mount Non-Polar

AEC-Q200

SHB-A series

MERITEK


SPECIFICATIONS

Rated Voltage	Rated Capacitance		Case Size	Tan δ	Ripple Current
(V _{DC})	(μF)	Code	(mm)	(%)	(mA/rms)
6.3	22	220	5x5.4	0.26	29
	33	330	6.3x5.4	0.26	43
	47	470	6.3x5.4	0.26	46
10	10	100	4x5.4	0.22	25
	22	220	6.3x5.4	0.22	39
	33	330	6.3x5.4	0.22	43
16	4.7	4R7	4x5.4	0.20	20
	10	100	5x5.4	0.20	25
	22	220	6.3x5.4	0.20	39

Note: Ripple Current measured at 120Hz, 105°C

Rated Voltage	Rated Capacitance		Case Size	Tan δ	Ripple Current
(V _{DC})	(μF)	Code	(mm)	(%)	(mA/rms)
25	3.3	3R3	4x5.4	0.20	12
	4.7	4R7	5x5.4	0.20	21
	10	100	6.3x5.4	0.20	28
35	2.2	2R2	4x5.4	0.20	12
	3.3	3R3	5x5.4	0.20	21
	4.7	4R7	5x5.4	0.20	22
50	10	100	6.3x5.4	0.20	30
	1.0	1R0	4x5.4	0.18	10
	2.2	2R2	5x5.4	0.18	16
	3.3	3R3	5x5.4	0.18	21
	4.7	4R7	6.3x5.4	0.18	31

DIMENSION

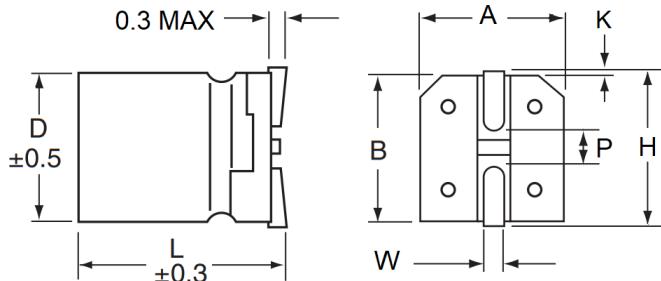

Unit: mm

D	L	A ±0.2	B Max	H Max	W ±0.1	P ±0.2	K
4.0 (D)	5.4	4.3	5.0	5.5	0.65	1.0	0.35+0.15/-0.2
5.0 (E)	5.4	5.3	6.0	6.5	0.65	1.5	0.35+0.15/-0.2
6.3 (F)	5.4	6.6	7.3	7.8	0.65	2.1	0.35+0.15/-0.2

**Aluminum Electrolytic Capacitors
Surface Mount Non-Polar
AEC-Q200**

SHB-A series

MERITEK

PART NUMBERING SYSTEM

SHB 1H 4R7 A F054

(1) (2) (3) (4) (5)

No	Item	Code	Description					
(1)	Product Code	SHB	Aluminum Electrolytic Capacitors, SMD type, Non-Polar, 2000 Hrs 105°C					
(2)	Rated Voltage	1H	50VDC		DC Voltage Code			
(3)	Capacitance	4R7	4.7µF ±20% (M)		First two digits: significant, Third: Multiplier			
(4)	Series Code	A	AEC-Q200 Compliant Series					
(5)	Size Code	F054	6.3x5.4mm		DxL (mm)			

Voltage	4	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
Code	0G	0J	1A	1C	1E	1V	1H	1J	2A	2C	2D	2E	2V	2G	2W	2H

Diameter	4	5	6.3	8	10	12.5	14.5	16	18	20	22	25
Code	D	E	F	H	J	K	U	L	M	N	P	Q

*Specifications subject to change without notice.