

# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK

## FEATURE

- Magnetic Shield Construction for Power Circuit.
- Large Current and Low DC Resistance
- Low Profile Power Inductors
- Application: DC/DC Converter, Battery Powered Devices, Low Profile High Current Power Supply, Notebook/Server
- AEC-Q200 Compliant




## ELECTRICAL CHARACTERISTICS

Part Number	Inductance (μH)	Tolerance (%)	Test Frequency (Hz)	DCR ±20% (mΩ)	I <sub>SAT</sub> (A)	I <sub>RMS</sub> (A)
PIWR50□8040M65	0.5	M, Y	1MHz/1V	5.5	17.0	12.0
PIW1R0□8040M65	1.0	M, Y	1MHz/1V	8.2	13.8	8.5
PIW1R4□8040M65	1.4	M, Y	1MHz/1V	10.0	11.8	8.2
PIW1R5□8040M65	1.5	M, Y	1MHz/1V	10.0	11.5	8.0
PIW2R2□8040M65	2.2	M, Y	1MHz/1V	11.5	9.8	7.4
PIW3R3□8040M65	3.3	M, Y	1MHz/1V	15.0	8.0	6.6
PIW3R6□8040M65	3.6	M, Y	1MHz/1V	15.0	7.6	6.4
PIW4R7□8040M65	4.7	L, M, Y	1MHz/1V	19.5	6.7	5.8
PIW5R6□8040M65	5.6	L, M, Y	1MHz/1V	22	6.2	5.4
PIW6R8□8040M65	6.8	L, M, Y	1MHz/1V	25	5.6	5.1
PIW100□8040M65	10	K, L, M, Y	1MHz/1V	33	5.0	4.6
PIW150□8040M65	15	K, L, M, Y	1MHz/1V	50	4.0	3.6
PIW220□8040M65	22	K, L, M, Y	1MHz/1V	73	3.1	2.9
PIW330□8040M65	33	K, L, M, Y	1MHz/1V	100	2.6	2.3
PIW470□8040M65	47	K, L, M, Y	1MHz/1V	135	2.2	2.0
PIW560□8040M65	56	K, L, M, Y	1MHz/1V	160	1.90	1.75
PIW680□8040M65	68	K, L, M, Y	1MHz/1V	205	1.75	1.65
PIW820□8040M65	82	K, L, M, Y	1MHz/1V	230	1.60	1.40
PIW101□8040M65	100	K, L, M, Y	1MHz/1V	300	1.45	1.20
PIW121□8040M65	120	K, L, M, Y	1MHz/1V	350	1.30	1.10
PIW151□8040M65	150	K, L, M, Y	1MHz/1V	410	1.20	0.98
PIW181□8040M65	180	K, L, M, Y	1MHz/1V	490	1.04	0.91
PIW221□8040M65	220	K, L, M, Y	1MHz/1V	610	0.99	0.85
PIW331□8040M65	330	K, L, M, Y	100KHz/1V	850	0.75	0.70
PIW471□8040M65	470	K, L, M, Y	100KHz/1V	1300	0.60	0.63

Notes:

1. All test data referenced to 25°C ambient.
2. Saturation Current (I<sub>sat</sub>) based on inductance drop ( $\Delta L/L_0$ :  $\leq 30\%$ ) approximately
3. Heat Rated Current (I<sub>rms</sub>) based on temperature rise ( $\Delta T$ : 40 °C) approximately
4. □: Tolerance Code Ratings: K =  $\pm 10\%$ , L =  $\pm 15\%$ , M =  $\pm 20\%$ , Y =  $\pm 30\%$
5. Operating Temperature: -55°C ~ +125°C (Including Self-temperature rise)

## DIMENSIONS

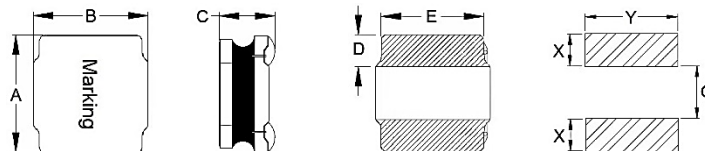

Size Code	A	B	C	D	E	X	Y	G
8040 (< 1.0 μH)	8.0 ±0.3	8.0 ±0.3	4.2 Max	2.4 ±0.3	6.3 ±0.3	2.85	6.6	2.8
8040 (≥ 1.0 μH)	8.0 ±0.3	8.0 ±0.3	3.7 ±0.3	2.4 ±0.3	6.3 ±0.3	2.85	6.6	2.8

Unit: mm


Notes: 1. The above PCB layout reference only. 2. Recommend solder paste thickness at 0.15mm and above.

# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK

## CHARACTERISTIC CURVES- PIW-8040M65 series

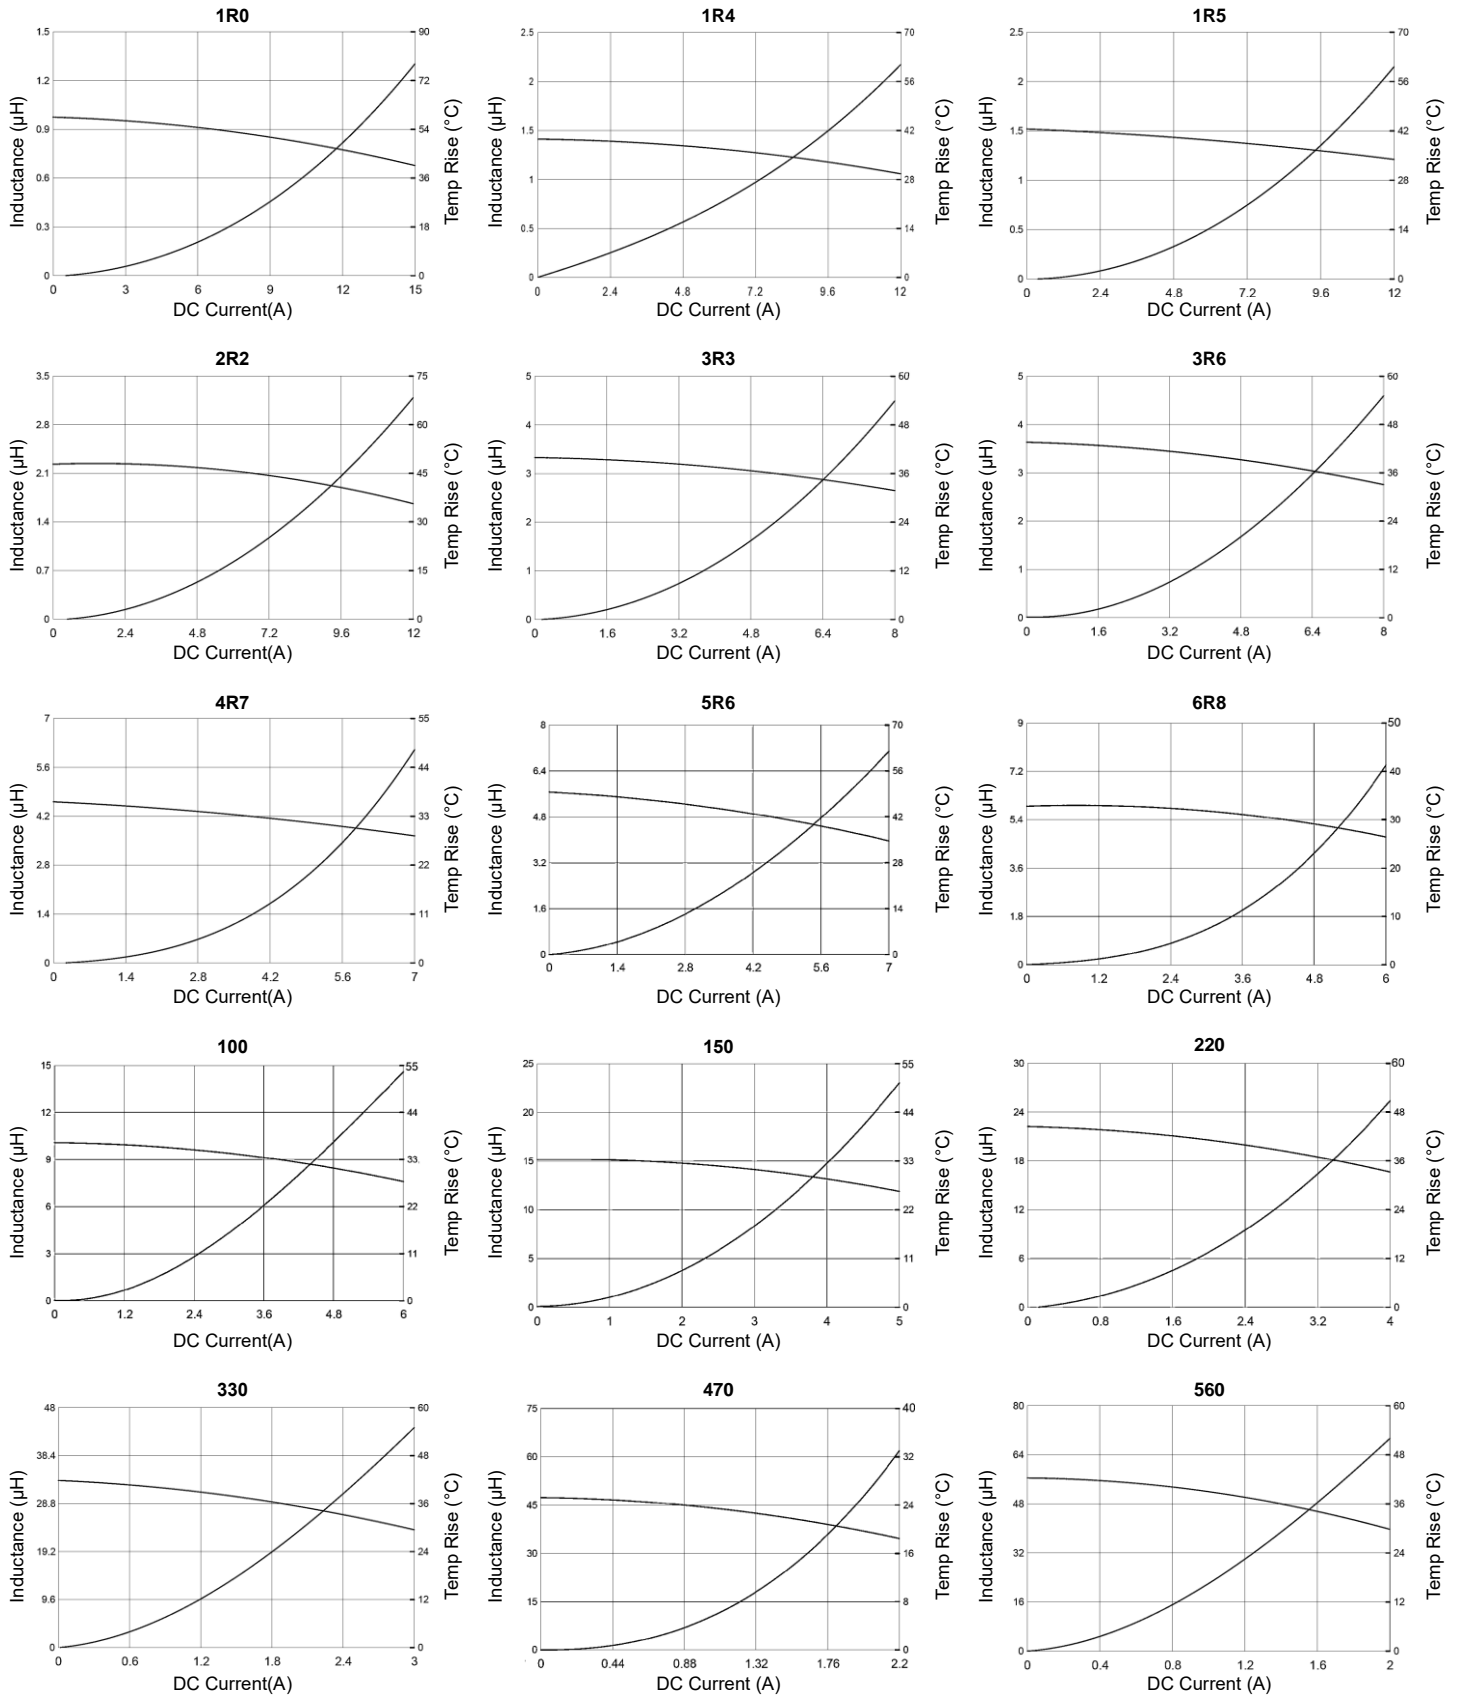


# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK

## CHARACTERISTIC CURVES- PIW-8040M65 series


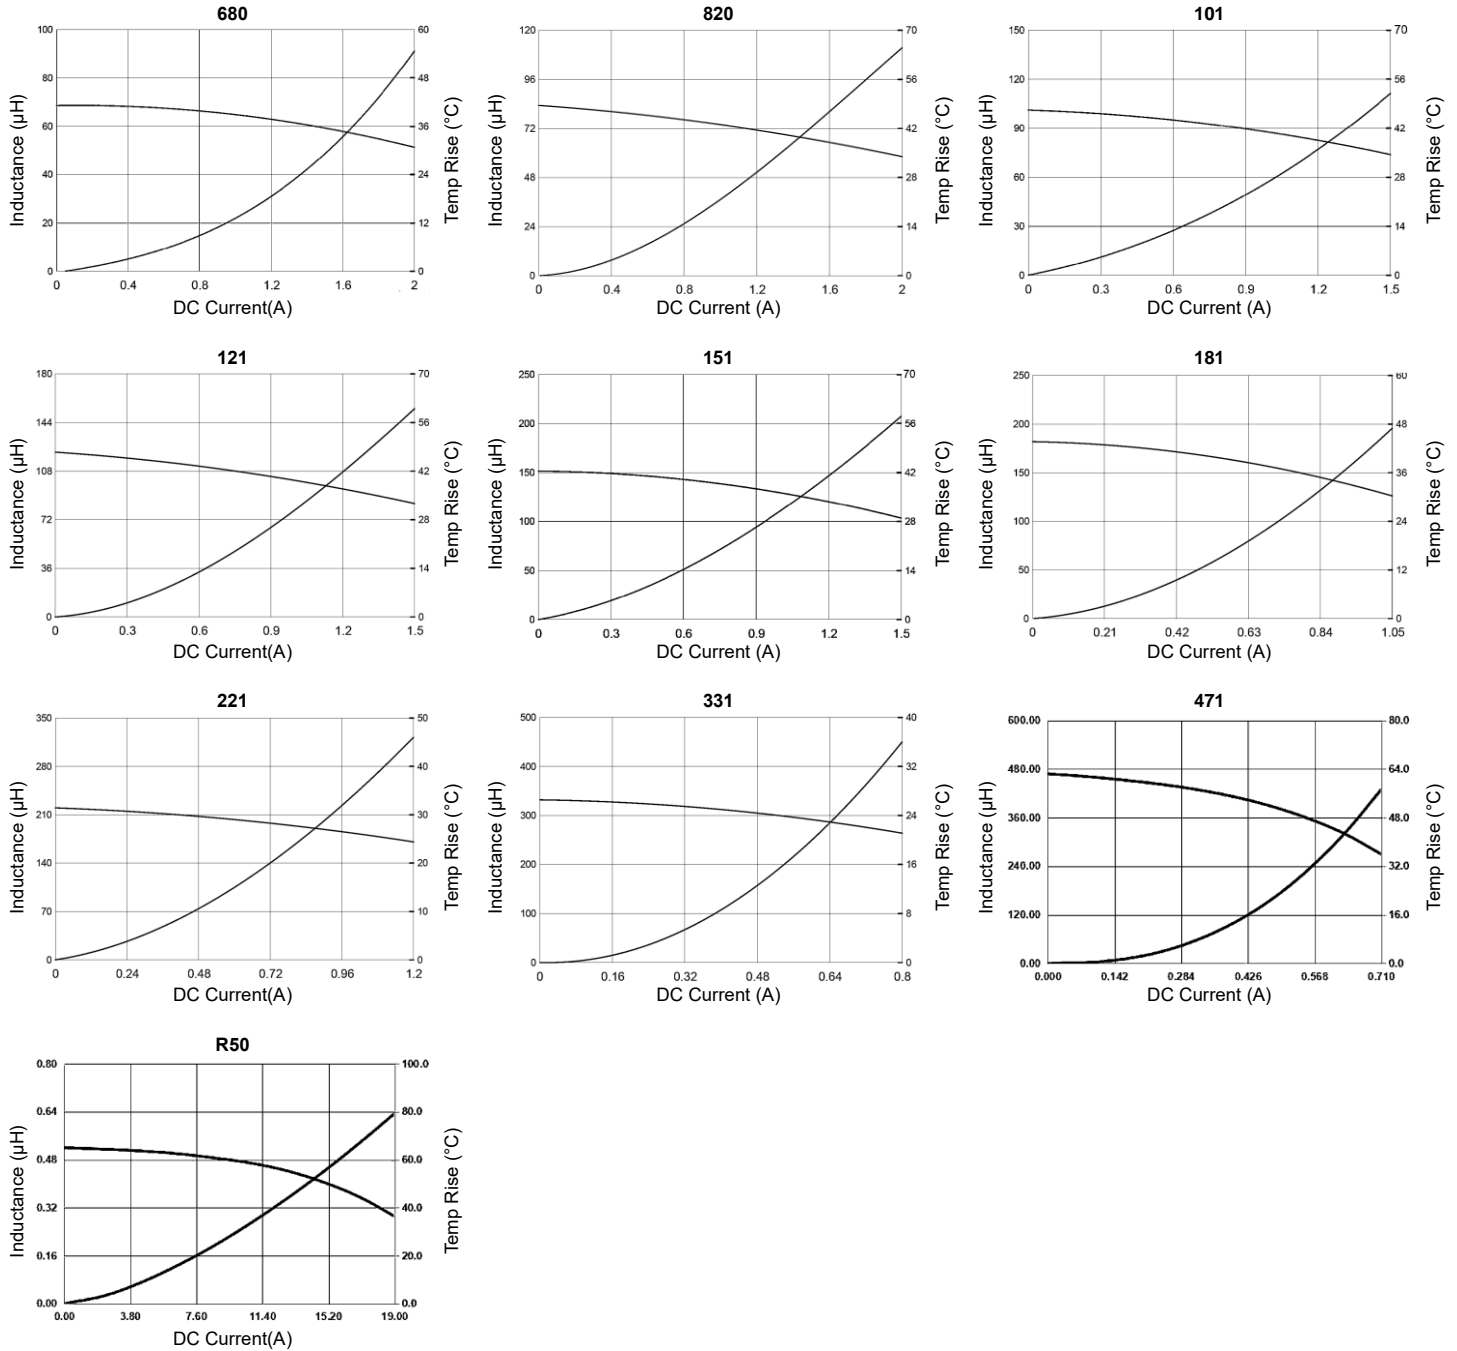


# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK

## RELIABILITY TEST CONDITON AND REQUIREMENT

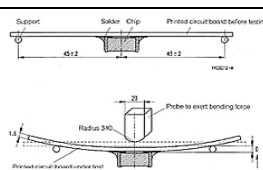
Item	Test Standards / Conditions / Equipment	Requirement															
Inductance	HP4284A, CH11025, CH3302, CH1320, CH1320S, LCR Meter	Refer to specification															
DC Resistance	CH16502, Agilent33420A Micro-Ohm Meter	Refer to specification															
Mechanical Shock	<table border="1"> <thead> <tr> <th>Type</th> <th>Peak value (g's)</th> <th>Normal duration (D) (ms)</th> <th>Wave form</th> <th>Velocity change (Vi) ft/sec</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> <tr> <td>Lead</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> </tbody> </table>	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi) ft/sec	SMD	100	6	Half-sine	12.3	Lead	100	6	Half-sine	12.3	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value
	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi) ft/sec												
SMD	100	6	Half-sine	12.3													
Lead	100	6	Half-sine	12.3													
Solderability	Method B1, 4 Hrs at 155°C dry heat at 255°C $\pm 5^\circ\text{C}$ Test Time: 5 +0/-0.5 seconds. Method D category 3. (steam aging 8 hours $\pm 15\text{min}$ ) at 260°C $\pm 5^\circ\text{C}$ Test Time: 30+0/-0.5 seconds.	More than 95% of the terminal electrode should be covered with solder.															
Resistance to Soldering Heat	Solder temperature: 260 $\pm 5^\circ\text{C}$ for 10 seconds Temperature ramp/immersion and emersion rate 25mm/s $\pm 6$ mm/s. Completely cover the termination.	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value															
Vibration	Oscillation Frequency: 10~2K~10 Hz for 20 minutes Equipment : Vibration checker Total Amplitude: 1.52mm $\pm 10\%$ Testing Time: 12 hours (20 minutes, 12 cycles each of 3 orientations)																
High Temperature Exposure	Temperature: 125 $\pm 2^\circ\text{C}$ Duration 1000Hrs Min Measured at room temperature after placing for 24 $\pm 2$ hrs	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value															
Biased Humidity	Humidity: 85 $\pm 3\%$ R.H. Temperature: 85°C $\pm 2^\circ\text{C}$ Duration: 1000Hrs Min Measured at Room Temperature after placing for 24 $\pm 2$ hrs																
High Temperature Operational Life	Temperature: 125 $\pm 2^\circ\text{C}$ Duration: 1000Hrs Min. with 100% rated current Measured at Room Temperature after placing for 24 $\pm 2$ Hrs																
Temperature Cycling	Condition for 1 cycle <table border="1"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temperature</td> <td>-55 <math>\pm 2^\circ\text{C}</math></td> <td>125 <math>\pm 2^\circ\text{C}</math></td> <td>125 <math>\pm 2^\circ\text{C}</math></td> <td>Low Temp</td> </tr> <tr> <td>Duration</td> <td>30min Min</td> <td>1 min Max</td> <td>30 min Min</td> <td>1 min Max</td> </tr> </tbody> </table> Number of Cycle: 1000 Measured at room temperature after placing for 24 $\pm 2$ hrs	Step	1	2	3	4	Temperature	-55 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	Low Temp	Duration	30min Min	1 min Max	30 min Min	1 min Max	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value
	Step	1	2	3	4												
Temperature	-55 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	Low Temp													
Duration	30min Min	1 min Max	30 min Min	1 min Max													
Thermal Shock	Condition for 1 cycle <table border="1"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> </tr> </thead> <tbody> <tr> <td>Temperature</td> <td>-55 <math>\pm 2^\circ\text{C}</math></td> <td>125 <math>\pm 2^\circ\text{C}</math></td> <td>125 <math>\pm 2^\circ\text{C}</math></td> </tr> <tr> <td>Duration</td> <td>15<math>\pm 1</math>min</td> <td>20sec</td> <td>15<math>\pm 1</math>min</td> </tr> </tbody> </table> Number of cycles : 300 Measured at room temperature after placing for 24 $\pm 2$ hrs.	Step	1	2	3	Temperature	-55 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	Duration	15 $\pm 1$ min	20sec	15 $\pm 1$ min	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value			
	Step	1	2	3													
Temperature	-55 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$	125 $\pm 2^\circ\text{C}$														
Duration	15 $\pm 1$ min	20sec	15 $\pm 1$ min														
ESD	AEC-Q200-002 HBM ESD, Contact Discharge Level: 4KV (Level 2)	Appearance: No damage															
Resistance to Solvents	Add aqueous wash chemical - OKEM clean or equivalent.	Appearance : No damage															
Terminal Strength	Component mounted on a PCB apply a force 1.8kg to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to shock the component being tested. 	Appearance : No damage															
Board Flex	Place the 100x40mm board into a fixture with the component facing down. Apply a force which will bend the board (D) x = 2mm minimum. Duration: 60 (+5) seconds. The Force is to be applied only once to the board 	Appearance : No damage															
Flammability	Electrical Test not Required	V-0 or V-1 are acceptable.															

# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK


## DIMENSIONS- PIW-M65 series

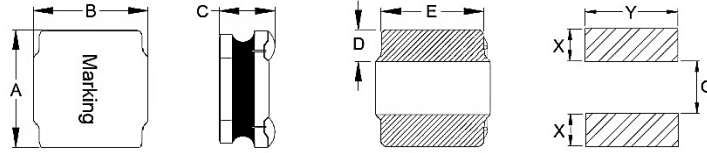

Unit: mm

Size Code	A	B	C	D	E	X	Y	G
3010	3.0 ±0.2	3.0 ±0.2	0.9 ±0.1	0.9 ±0.3	2.7 ±0.3	1.25	3.5	0.9
3012	3.0 ±0.2	3.0 ±0.2	1.0 ±0.2	0.9 ±0.3	2.7 ±0.3	1.25	3.5	0.9
3015	3.0 ±0.2	3.0 ±0.2	1.3 ±0.2	0.9 ±0.3	2.7 ±0.3	1.25	3.5	0.9
6045	6.0 ±0.3	6.0 ±0.3	4.2 ±0.3	1.9 ±0.3	4.8 ±0.3	3.0	6.3	5.5
8040 (< 1.0 µH)	8.0 ±0.3	8.0 ±0.3	4.2 Max	2.4 ±0.3	6.3 ±0.3	2.85	6.6	2.8
8040 (≥ 1.0 µH)	8.0 ±0.3	8.0 ±0.3	3.7 ±0.3	2.4 ±0.3	6.3 ±0.3	2.85	6.6	2.8


Notes: 1. The above PCB layout reference only. 2. Recommend solder paste thickness at 0.15mm and above.

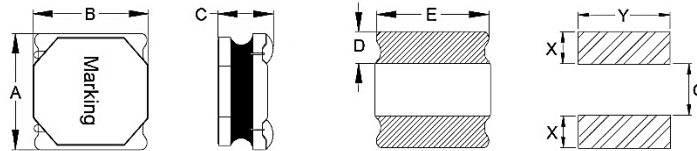

Unit: mm

Size Code	A	B	C	D	E	X	Y	G
3612	3.6 ±0.2	3.6 ±0.2	1.0 ±0.2	1.2 ±0.3	3.2 ±0.3	0.9	3.7	2.0
4010	4.0 ±0.2	4.0 ±0.2	0.9 ±0.1	1.2 ±0.3	3.5 ±0.3	1.5	4.5	1.5
4012	4.0 ±0.2	4.0 ±0.2	1.0 ±0.2	1.2 ±0.3	3.5 ±0.3	1.5	4.5	1.5
4018	4.0 ±0.2	4.0 ±0.2	1.6 ±0.2	1.1 ±0.2	3.5 ±0.3	1.5	4.5	1.5
4020	4.0 ±0.2	4.0 ±0.2	1.8 ±0.2	1.2 ±0.3	3.4 ±0.3	1.5	4.5	1.5
4030	4.0 ±0.2	4.0 ±0.2	3.0 Max.	1.35 ±0.3	3.4 ±0.4	1.5	3.7	1.3
5010	5.0 ±0.2	5.0 ±0.2	0.9 ±0.1	1.5 ±0.3	4.0 ±0.3	1.85	5.5	1.8
5012	5.0 ±0.2	5.0 ±0.2	1.0 ±0.2	1.5 ±0.3	4.0 ±0.3	1.85	5.5	1.8
5020	5.0 ±0.2	5.0 ±0.2	1.8 ±0.2	1.3 ±0.2	4.7 ±0.2	1.5	4.7	2.1
5030	5.0 ±0.2	5.0 ±0.2	2.8 ±0.2	1.3 ±0.2	4.7 ±0.3	1.85	5.5	1.8
5040 (≤ 10 µH)	4.95 ±0.2	4.95 ±0.2	3.9 ±0.2	1.3 ±0.2	4.2 ±0.2	1.5	4.2	2.1
5040 (> 10 µH)	4.95 ±0.2	4.95 ±0.2	3.8 ±0.2	1.3 ±0.2	4.2 ±0.2	1.5	4.2	2.1
6020	6.0 ±0.2	6.0 ±0.2	1.8 ±0.2	1.6 ±0.3	5.8 ±0.3	1.8	5.8	2.5
6028	6.0 ±0.2	6.0 ±0.2	2.6 ±0.2	1.6 ±0.3	5.8 ±0.3	1.8	5.8	2.5

Notes: 1. The above PCB layout reference only. 2. Recommend solder paste thickness at 0.15mm and above.

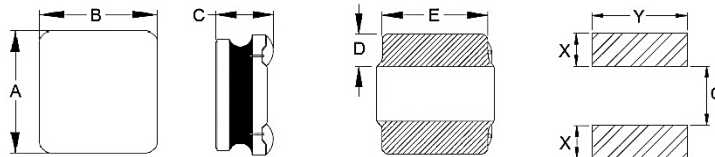

Unit: mm

Size Code	A	B	C	D	E	X	Y	G
2016A	2.0 ±0.2	1.6 ±0.2	0.7 ±0.1	0.7 ±0.3	1.8 ±0.2	1.0	2.1	0.5
2016B	2.0 ±0.2	1.6 ±0.2	0.9 ±0.1	0.7 ±0.3	1.6 ±0.2	1.0	2.1	0.5
2016C	2.0 ±0.2	1.6 ±0.2	1.0 ±0.2	0.7 ±0.3	1.6 ±0.2	1.0	2.1	0.5
2520A	2.5 ±0.2	2.0 ±0.2	0.7 ±0.1	0.9 ±0.3	2.0 ±0.2	1.15	2.5	0.7
2520B	2.5 ±0.2	2.0 ±0.2	0.9 ±0.1	0.9 ±0.3	2.0 ±0.2	1.15	2.5	0.7
2520C	2.5 ±0.2	2.0 ±0.2	1.0 ±0.2	0.9 ±0.3	2.0 ±0.2	1.15	2.5	0.7
3225C	3.2 ±0.2	2.5 ±0.2	1.0 ±0.2	1.0 ±0.3	2.5 ±0.2	1.25	3.0	1.0

Notes: 1. The above PCB layout reference only. 2. Recommend solder paste thickness at 0.15mm and above.

# Power Inductor SMD Low Profile, High Current AEC-Q200

PIW-8040M65

MERITEK

## PART NUMBERING SYSTEM

PIW    471M    8040    M65  
(1)        (2)        (3)        (4)

No	Item	Code	Description	
(1)	Product Code	PIW	Power Inductor series, Wire Wound type	
(2)	Inductance	471M	470 $\mu$ H $\pm$ 20%(M)	First two digits: significant, Third: multiplier
(3)	Size Code	8040	8.0x8.0x4.0 mm	Length x Width x Thickness (mm)
(4)	Series Code	M65	Surface Mount Shielded, Low Profile, High Current series, AEC-Q200 Compliant	

## RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{s(min)}$	150°C
	Temp. Max $T_{s(max)}$	200°C
	Time (min. to max.) ( $t_s$ )	60 ~120 seconds
Average ramp up rate (Liquidus Temperature) ( $T_L$ ) to peak		3°C/second max
$T_{s(max)}$ to $T_L$ (Ramp-up rate)		3°C/second max
Reflow	Temp. ( $T_L$ )	217°C
	Time (min. to max.) ( $t_L$ )	60 ~150 seconds
Peak Temperature ( $T_P$ )		See table below
Time within 5°C of actual peak Temperature ( $t_p$ )		10 seconds max
Ramp-down Rate		6°C/second max
Reflow Times		3 times max

Peak Temperature ( $T_P$ )			
Volume	< 350mm <sup>3</sup>	350-2000mm <sup>3</sup>	> 2000mm <sup>3</sup>
Thickness < 1.6mm	260°C	260°C	260°C
Thickness 1.6-2.5mm	260°C	250°C	245°C
Thickness $\geq$ 2.5mm	250°C	245°C	245°C

\*Specifications subject to change without notice

