

SMD Power Inductor

Low Profile, High Current Type

PIW08-B63

MERITEK

FEATURE

- Magnetic Shield Construction for Power Circuit.
- Large Current and Low DC Resistance
- Low Profile Power Inductors
- Application: DC/DC Converter, Battery Powered Devices, Low Profile High Current Power Supply, Notebook/Server



ELECTRICAL CHARACTERISTICS

Part Number	Inductance (μH)	Tolerance (%)	Test Freq (Hz)	DCR Typ (Ω)	DCR Max (Ω)	I _{SAT} (A)	I _{RMS} (A)
PIW08R24MFB63	0.24	±20	1V/1M	0.018	0.022	9.50	5.50
PIW08R33MFB63	0.33	±20	1V/1M	0.023	0.028	8.00	5.30
PIW08R47MFB63	0.47	±20	1V/1M	0.027	0.035	7.00	4.60
PIW08R68MFB63	0.68	±20	1V/1M	0.032	0.040	5.50	4.20
PIW081R0MFB63	1.00	±20	1V/1M	0.044	0.053	4.90	3.50
PIW081R5MFB63	1.50	±20	1V/1M	0.062	0.074	3.80	3.20
PIW082R2MFB63	2.20	±20	1V/1M	0.078	0.093	2.80	2.60
PIW083R3MFB63	3.30	±20	1V/1M	0.125	0.150	2.10	2.00
PIW084R7MFB63	4.70	±20	1V/1M	0.180	0.216	1.70	1.70
PIW08R16MHB63	0.16	±20	1V/1M	0.015	0.020	7.50	5.50
PIW08R24MHB63	0.24	±20	1V/1M	0.022	0.028	6.70	5.00
PIW08R33MHB63	0.33	±20	1V/1M	0.023	0.029	5.50	4.30
PIW08R47MHB63	0.47	±20	1V/1M	0.029	0.035	4.90	3.90
PIW08R56MHB63	0.56	±20	1V/1M	0.035	0.042	4.00	3.50
PIW08R68MHB63	0.68	±20	1V/1M	0.036	0.043	3.80	3.40
PIW08R82MHB63	0.82	±20	1V/1M	0.043	0.052	3.20	3.10
PIW081R0MHB63	1.00	±20	1V/1M	0.044	0.053	3.10	3.00
PIW081R2MHB63	1.20	±20	1V/1M	0.070	0.084	3.00	2.30
PIW081R5MHB63	1.50	±20	1V/1M	0.072	0.086	2.70	2.20
PIW081R8MHB63	1.80	±20	1V/1M	0.088	0.106	2.30	2.20
PIW082R2MHB63	2.20	±20	1V/1M	0.090	0.108	2.10	2.10
PIW083R3MHB63	3.30	±20	1V/1M	0.190	0.230	1.70	1.30
PIW084R7MHB63	4.70	±20	1V/1M	0.220	0.264	1.40	1.20
PIW08R24MRB63	0.24	±20	1V/1M	0.022	0.028	7.50	5.50
PIW08R33MRB63	0.33	±20	1V/1M	0.025	0.030	6.00	4.80
PIW08R47MRB63	0.47	±20	1V/1M	0.035	0.040	5.50	4.30
PIW08R56MRB63	0.56	±20	1V/1M	0.040	0.048	4.80	4.00
PIW08R68MRB63	0.68	±20	1V/1M	0.045	0.054	4.40	3.80
PIW081R0MRB63	1.00	±20	1V/1M	0.062	0.071	3.60	3.30
PIW081R2MRB63	1.20	±20	1V/1M	0.070	0.080	3.20	2.90
PIW081R5MRB63	1.50	±20	1V/1M	0.080	0.090	2.90	2.70
PIW082R2MRB63	2.20	±20	1V/1M	0.120	0.132	2.40	2.30
PIW083R3MRB63	3.30	±20	1V/1M	0.190	0.216	2.10	1.70
PIW084R7MRB63	4.70	±20	1V/1M	0.245	0.276	1.70	1.40
PIW086R8MRB63	6.80	±20	1V/1M	0.330	0.383	1.50	1.20
PIW088R2MRB63	8.20	±20	1V/1M	0.410	0.476	1.40	1.10
PIW08100MRB63	10.0	±20	1V/1M	0.530	0.610	1.30	1.00

Notes:

1. All test data referenced to 25°C ambient.
2. Saturation Current (Isat) based on inductance drop ($\Delta L/L_0 \leq 30\%$) approximately
3. Heat Rated Current (I_{rms}) based on temperature rise ($\Delta T: 40^\circ\text{C}$) approximately
4. Heat Rated Current (I_{rms}) measurement board: Board dimension: 100x50x1.6mm, Pattern dimension:45x30mm, Pattern thickness: 50μm
5. Operating Temperature: -40°C ~ +125°C (Including Self-temperature rise)


SMD Power Inductor

Low Profile, High Current Type

PIW08-B63

MERITEK


DIMENSIONS

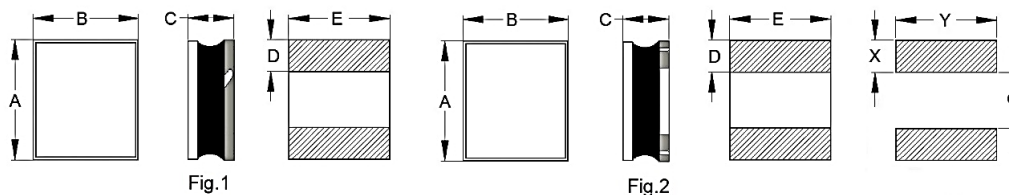

(Unit: mm)

Series	A	B	C Max	D ref.	E	X	Y	G	Fig
PIW08-FB63	2.4~2.7	1.9~2.2	1.0	0.75	2.0	0.95	2.4	1.0	1
PIW08-HB63	2.4~2.7	1.9~2.2	1.0	0.75	2.0	0.95	2.4	1.0	1
PIW08-RB63	2.5 ±0.2	2.0 ±0.2	1.0	0.80 ±0.20	2.0	0.95	2.4	1.0	2

CHARACTERISTIC CURVES- PIW08-FB63 series

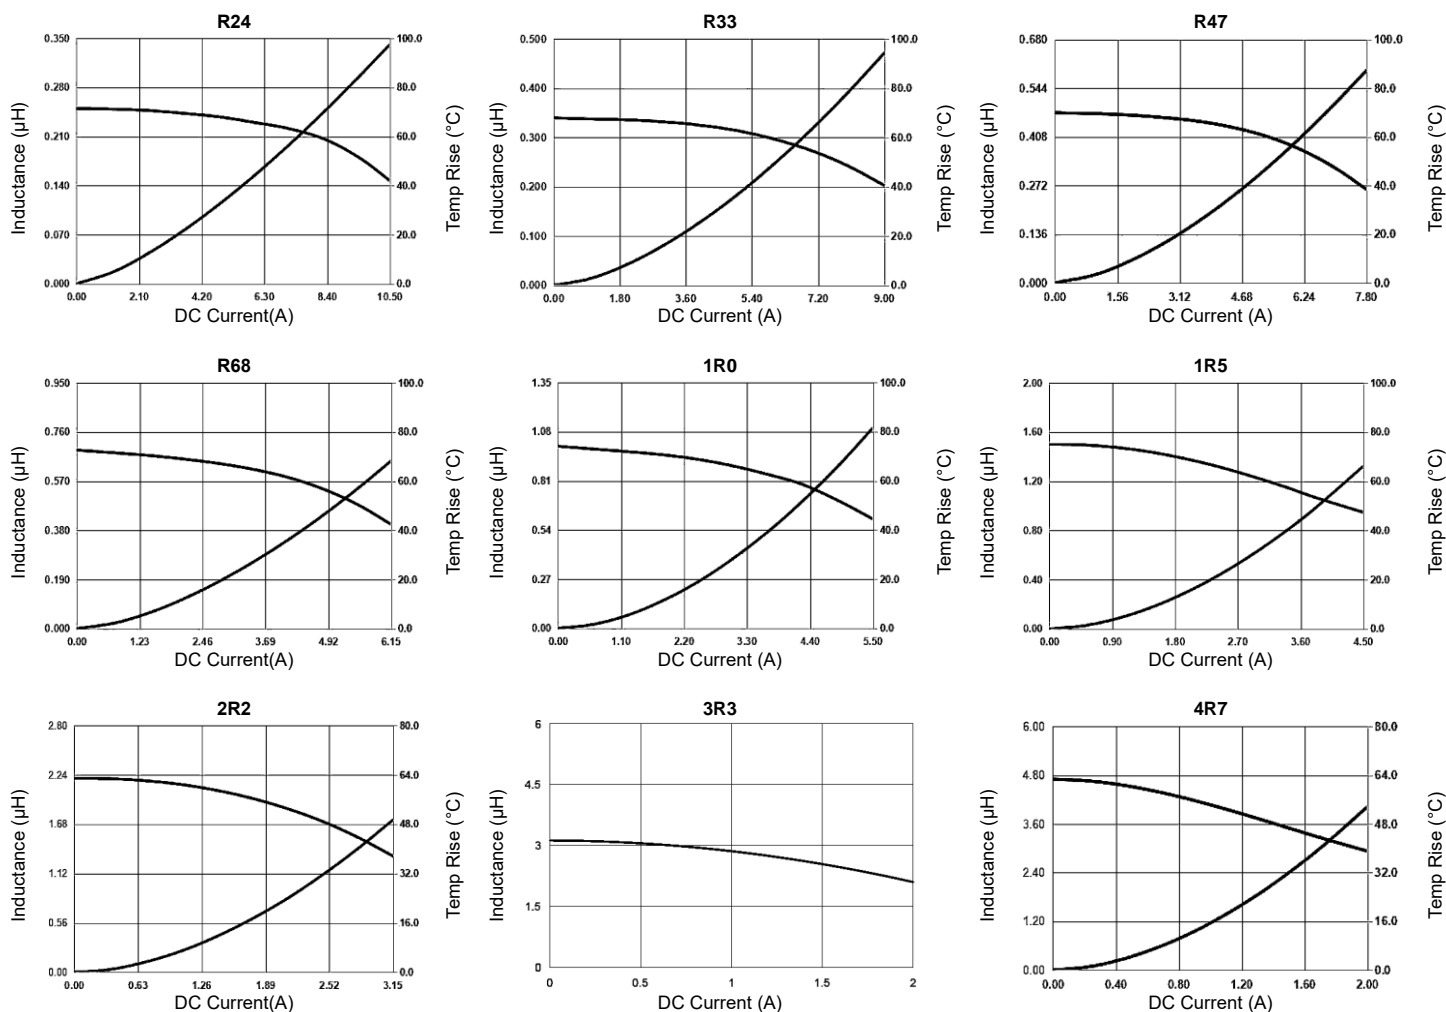















SMD Power Inductor

Low Profile, High Current Type















PIW08-B63

MERITEK

CHARACTERISTIC CURVES- PIW08-HB63 series

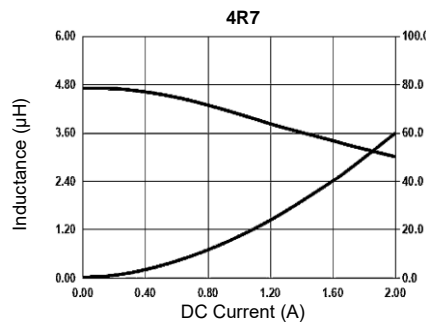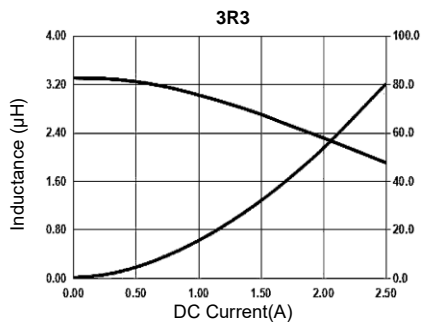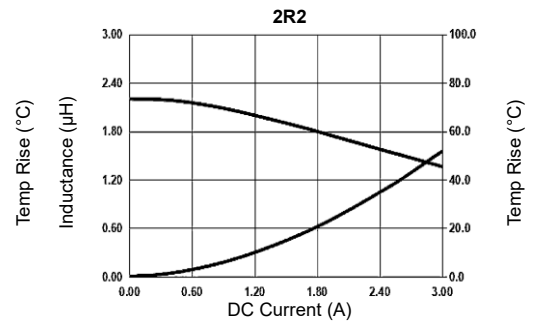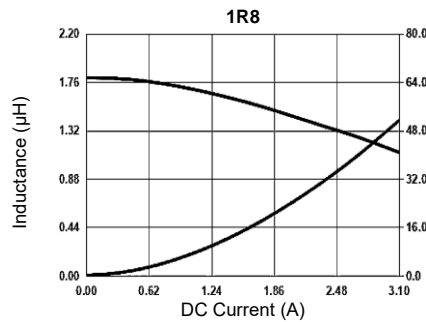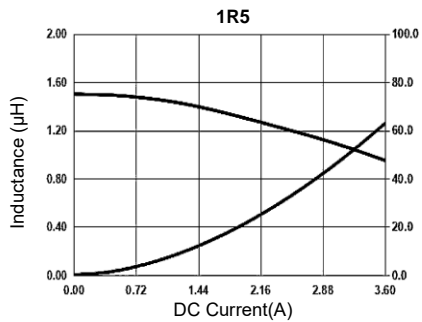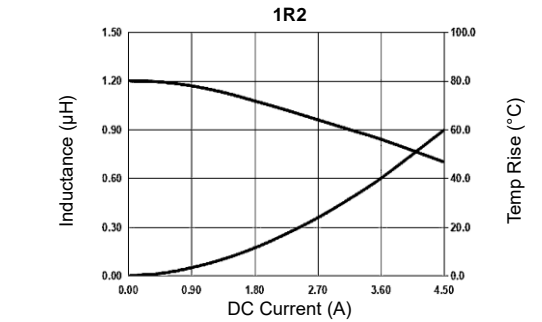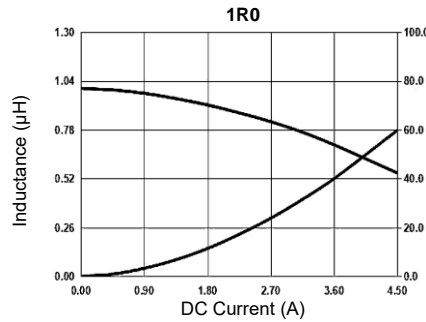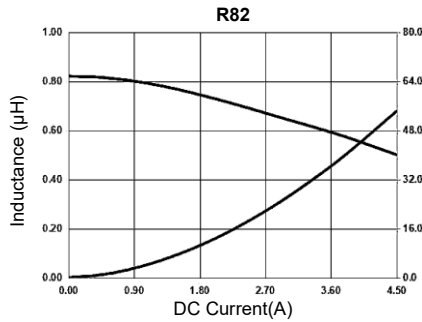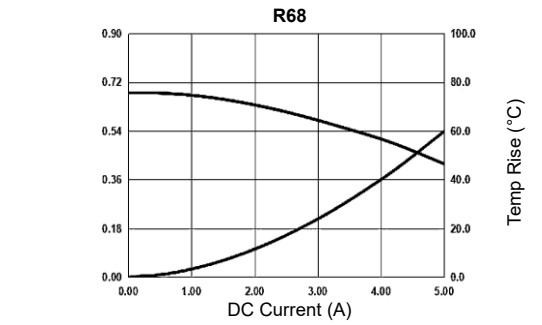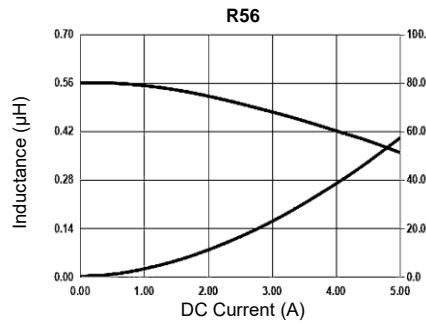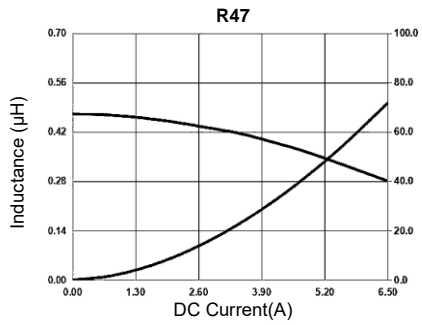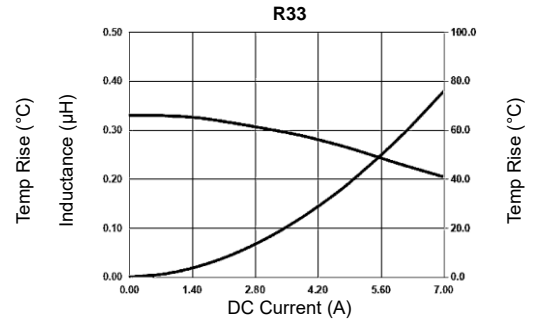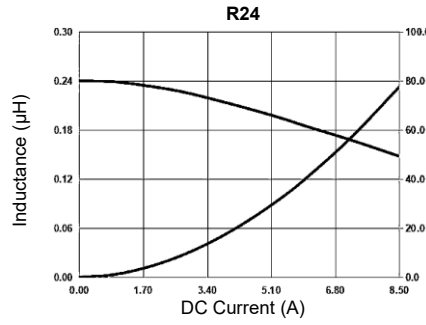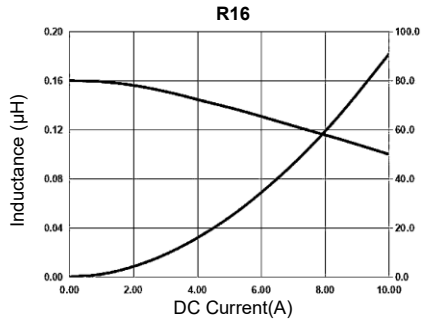

CHARACTERISTIC CURVES- PIW08-RB63 series

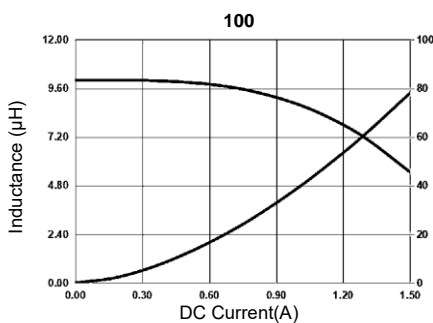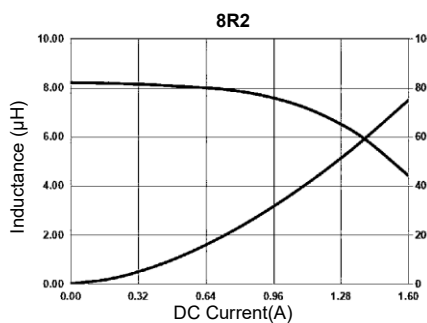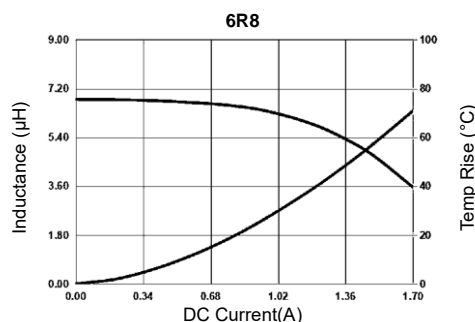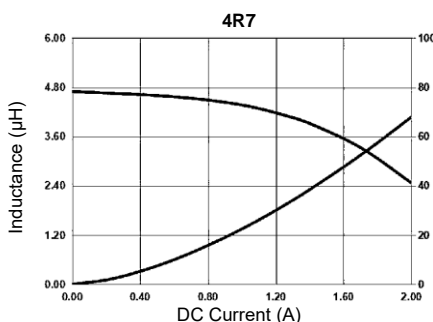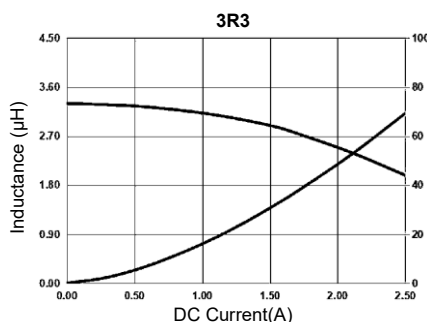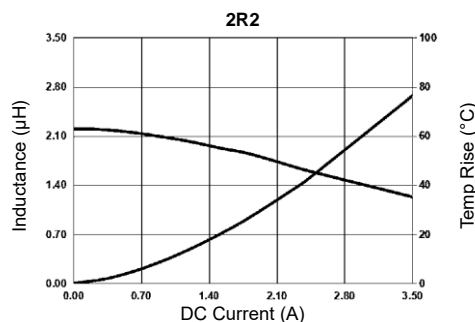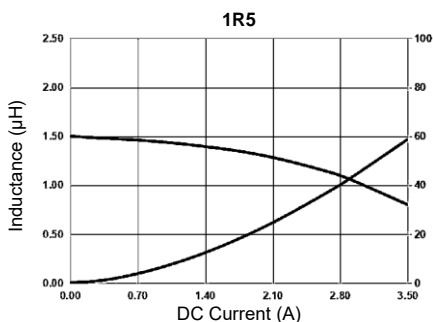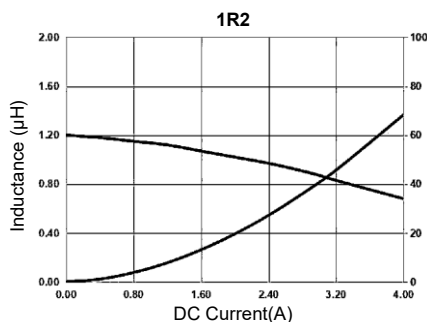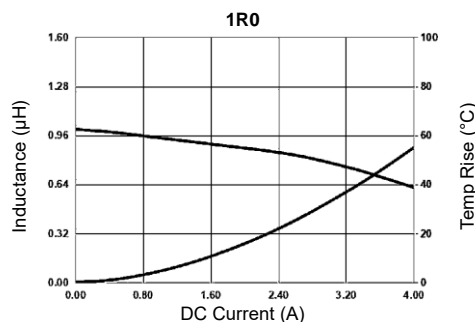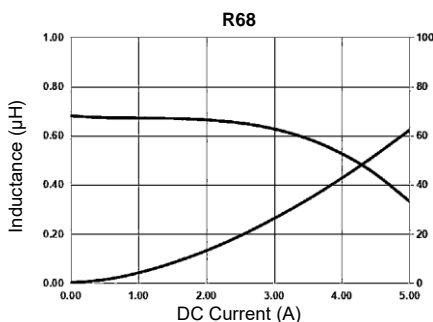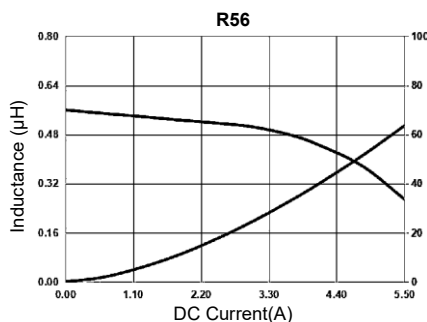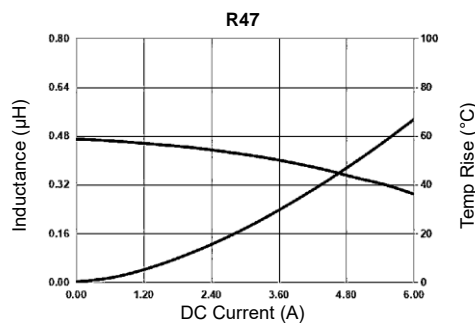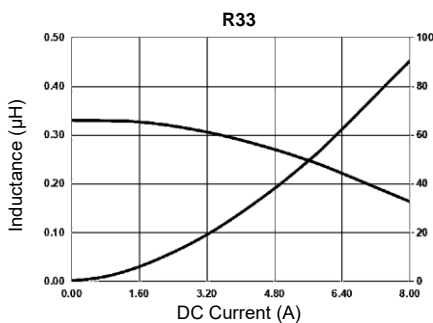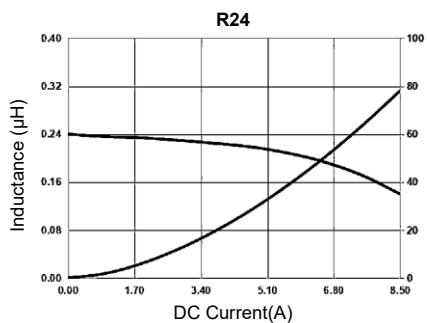



SMD Power Inductor

Low Profile, High Current Type

PIW08-B63

MERITEK

RELIABILITY TEST CONDITON AND REQUIREMENT

Item	Test Standards / Conditions / Equipment	Requirement															
Inductance	HP4284A, CH11025, CH3302, CH1320, CH1320S, LCR Meter	Refer to specification															
DC Resistance	CH16502, Agilent33420A Micro-Ohm Meter	Refer to specification															
Mechanical Shock	<table border="1"> <thead> <tr> <th>Type</th> <th>Peak value (g's)</th> <th>Normal duration (D) (ms)</th> <th>Wave form</th> <th>Velocity change (Vi) ft/sec</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>50</td> <td>11</td> <td>Half-sine</td> <td>11.3</td> </tr> <tr> <td>Lead</td> <td>50</td> <td>11</td> <td>Half-sine</td> <td>11.3</td> </tr> </tbody> </table>	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi) ft/sec	SMD	50	11	Half-sine	11.3	Lead	50	11	Half-sine	11.3	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value
	Type	Peak value (g's)	Normal duration (D) (ms)	Wave form	Velocity change (Vi) ft/sec												
SMD	50	11	Half-sine	11.3													
Lead	50	11	Half-sine	11.3													
3 shocks in each direction along 3 perpendicular axes (18 shocks).																	
Solderability	Method B1, 4 Hrs at 155°C dry heat at 255°C \pm 5°C Test Time: 5 +0/-0.5 seconds. Method D category 3. (steam aging 8 hours \pm 15min) at 260°C \pm 5°C Test Time: 30+0/-0.5 seconds.	More than 95% of the terminal electrode should be covered with solder.															
Resistance to Soldering Heat	Solder temperature: 260 \pm 5°C for 10 seconds Temperature ramp/immersion and emersion rate 25mm/s \pm 6 mm/s. Completely cover the termination. Number of cycles: 1 heat cycle																
Vibration	Oscillation Frequency: 10~2K~10 Hz for 20 minutes Equipment : Vibration Checker Total Amplitude:10g Testing Time: 12 hours (20 minutes, 12 cycles each of 3 orientations)	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value															
Load Humidity	Humidity: 85 \pm 3% R.H. Temperature: 85°C \pm 2°C Duration: 1000Hrs Min at 100% rated current Measured at Room Temperature after 24 \pm 2hrs																
Life Test	Temperature: 125 \pm 2°C Duration: 1000Hrs Min. with 100% rated current Measured at Room Temperature after 24 \pm 2Hrs																
Thermal Shock	Condition for 1 cycle	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value															
	<table border="1"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> </tr> </thead> <tbody> <tr> <td>Temperature</td> <td>-40 \pm2°C</td> <td>125 \pm2°C</td> <td>125 \pm2°C</td> </tr> <tr> <td>Duration</td> <td>30\pm5min</td> <td>\leq0.5min</td> <td>30\pm5min</td> </tr> </tbody> </table> Number of cycles : 500 Measured at room temperature after 24 \pm 2 hrs.		Step	1	2	3	Temperature	-40 \pm 2°C	125 \pm 2°C	125 \pm 2°C	Duration	30 \pm 5min	\leq 0.5min	30 \pm 5min			
Step	1	2	3														
Temperature	-40 \pm 2°C	125 \pm 2°C	125 \pm 2°C														
Duration	30 \pm 5min	\leq 0.5min	30 \pm 5min														
Terminal Strength	Component mounted on a PCB apply a force to the side of a device being tested. >0805inch(2012mm): 1Kg, <=0805inch(2012mm): 0.5Kg Duration 60 +1 seconds. The force shall be applied gradually as not to shock the component being tested.		Appearance : No damage														
Board Flex	Place the 100x40mm FR4 board into a fixture with the component facing down. Apply a force which will bend the board: >=0805in(2012mm): 1.2mm <0805in(2012mm): 0.8mm Duration: 10 seconds. The Force is to be applied only once to the board		Appearance : No damage														
Moisture Resistance	<ol style="list-style-type: none"> Baked at 50°C for 25hrs, measure at room after 4hrs. Raise temperature to 65\pm2°C 90-100%RH in 2.5hrs, Keep at 65°C for 3 hours, cool down to 25°C in 2.5hrs. Raise temperature to 65\pm2°C 90-100%RH in 2.5hrs Keep at 65°C for 3hrs, cool down to 25°C in 2.5hrs Keep at 25°C for 2hrs then keep at -10°C for 3hrs Keep at 25°C 80-100%RH for 15min, Vibrate at the frequency of 10 to 55 Hz to 10 Hz, Measure at room temperature after 1~2 hrs. 	Appearance: No damage Inductance: within $\pm 10\%$ of initial value Q: Shall not exceed the specification value RDC: within $\pm 15\%$ of initial value and shall not exceed the specification value															


SMD Power Inductor

Low Profile, High Current Type

PIW08-B63


MERITEK

DIMENSIONS

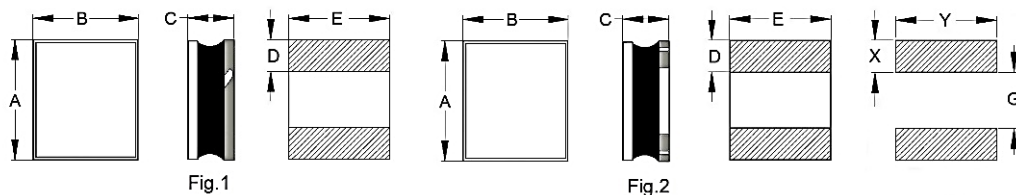

(Unit: mm)

Series	A	B	C Max	D ref.	E	X	Y	G	Fig
PIW03-FA63	1.6 ±0.2	0.8 ±0.2	0.8	0.5	0.8	0.75	1.15	0.6	1
PIW03-RA63	1.6 ±0.2	0.8 ±0.2	0.8	0.5	0.8	0.75	1.15	0.6	2
PIW04-FA63	1.2 ±0.2	1.0 ±0.2	0.8	0.4	1.0	0.45	1.2	0.5	1
PIW04-RA63	1.2 ±0.2	1.0 ±0.2	0.8	0.4	1.0	0.45	1.2	0.5	2
PIW05-FA63	2.0 ±0.2	1.2 ±0.2	0.8	0.5	1.2	0.75	1.4	0.8	1
PIW05-RA63	2.0 ±0.2	1.2 ±0.2	0.8	0.5	1.2	0.75	1.4	0.8	2
PIW05-FB63	2.0 ±0.2	1.2 ±0.2	1.0	0.5	1.2	0.75	1.4	0.8	1
PIW05-RB63	2.0 ±0.2	1.2 ±0.2	1.0	0.5	1.2	0.75	1.4	0.8	2
PIW06-FA63	1.9~2.2	1.5~1.8	0.8	0.5	1.6	0.75	1.9	0.8	1
PIW06-RA63	1.9~2.2	1.5~1.8	0.8	0.5	1.6	0.75	1.9	0.8	2
PIW06-FB63	1.9~2.2	1.5~1.8	1.0	0.5	1.6	0.75	1.9	0.8	1
PIW06-HB63	1.9~2.2	1.5~1.8	1.0	0.5	1.6	0.75	1.9	0.8	1
PIW06-RB63	2.0 ±0.2	1.6 ±0.2	1.0	0.65 ±0.20	1.6	0.75	1.9	0.8	2
PIW08-FA63	2.4~2.7	1.9~2.2	0.8	0.75	2.0	0.95	2.4	1.0	1
PIW08-RA63	2.4~2.7	1.9~2.2	0.8	0.75	2.0	0.95	2.4	1.0	2
PIW08-FB63	2.4~2.7	1.9~2.2	1.0	0.75	2.0	0.95	2.4	1.0	1
PIW08-HB63	2.4~2.7	1.9~2.2	1.0	0.75	2.0	0.95	2.4	1.0	1
PIW08-RB63	2.5 ±0.2	2.0 ±0.2	1.0	0.80 ±0.20	2.0	0.95	2.4	1.0	2
PIW08-FC63	2.4~2.7	1.9~2.2	1.2	0.75	2.0	0.95	2.4	1.0	1
PIW08-HC63	2.4~2.7	1.9~2.2	1.2	0.75	2.0	0.95	2.4	1.0	1
PIW08-RC63	2.5 ±0.2	2.0 ±0.2	1.2	0.80 ±0.20	2.0	0.95	2.4	1.0	2
PIW10-FA63	3.2 ±0.2	2.5 ±0.2	0.8	0.95	2.5	1.20	2.8	1.2	1
PIW10-RA63	3.2 ±0.2	2.5 ±0.2	0.8	0.95	2.5	1.20	2.8	1.2	2
PIW10-FB63	3.2 ±0.2	2.5 ±0.2	1.0	0.95	2.5	1.20	2.8	1.2	1
PIW10-FC63	3.2 ±0.2	2.5 ±0.2	1.2	0.95	2.5	1.20	2.8	1.2	1
PIW10-RC63	3.2 ±0.2	2.5 ±0.2	1.2	0.95	2.5	1.20	2.8	1.2	2
PIW-R40A63	4.0 ±0.2	4.0 ±0.2	0.8	1.4 ±0.25	4.0	1.50	4.5	1.5	2

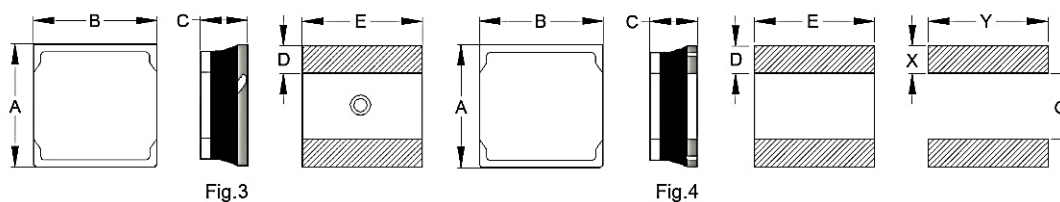

(Unit: mm)

Series	A	B	C Max	D ref.	E	X	Y	G	Fig
PIW-F30A63	3.0 ±0.2	3.0 ±0.2	0.8	1.0	3.0	1.25	3.5	0.9	3
PIW-R30A63	3.0 ±0.2	3.0 ±0.2	0.8	1.0	3.0	1.25	3.5	0.9	4
PIW-H30B63	3.0 ±0.2	3.0 ±0.2	1.0	1.0	3.0	1.25	3.5	0.9	3
PIW-H30C63	3.0 ±0.2	3.0 ±0.2	1.2	1.0	3.0	1.25	3.5	0.9	3
PIW-R30D63	3.0 ±0.2	3.0 ±0.2	1.5	1.0	3.0	1.25	3.5	0.9	4
PIW-H40B63	4.0 ±0.2	4.0 ±0.2	1.0	1.4 ±0.25	4.0	1.5	4.5	1.5	3
PIW-H40C63	4.0 ±0.2	4.0 ±0.2	1.2	1.4 ±0.25	4.0	1.5	4.5	1.5	3

SMD Power Inductor

Low Profile, High Current Type

PIW08-B63

MERITEK

PART NUMBERING SYSTEM

PIW **08** **100M** **R** **B63**
 (1) (2) (3) (4) (5)

No	Item	Code	Description	
(1)	Product Code	PIW	Power Inductor Series, Wire Wound Type	
(2)	Size Code	08	1008, 2.5 x 2.0mm	L x W (mm)
(3)	Inductance	100M	10.0μH ±20 (M)	R47: 0.47μH, 2R2: 2.2μH
(4)	Internal Code	R	R: R type	F: F type, H: H type
(5)	Series Code	B63	Surface Mount Shielded, Low Profile, High Current series, B: 1.0mm Height	

RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{s(min)}$	150°C
	Temp. Max $T_{s(max)}$	200°C
	Time (min. to max.) (t_s)	60 ~120 seconds
Average ramp up rate (Liquidus Temperature) (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L (Ramp-up rate)		3°C/second max
Reflow	Temp. (T_L)	217°C
	Time (min. to max.) (t_L)	60 ~150 seconds
Peak Temperature (T_P)		See table below
Time within 5°C of actual peak Temperature (t_p)		10 seconds max
Ramp-down Rate		6°C/second max
Reflow Times		3 times max

Peak Temperature (T_P)			
Volume	< 350mm ³	350-2000mm ³	> 2000mm ³
Thickness < 1.6mm	260°C	260°C	260°C
Thickness 1.6-2.5mm	260°C	250°C	245°C
Thickness ≥ 2.5mm	250°C	245°C	245°C

*Specifications subject to change without notice

