

Metal Oxide Varistor Current Protected type 20mm

CPV20-K9 Series

MERITEK


FEATURE

- Integrated PPTC and MOV Technology in a Single Protection Device
- Single Device for Overcurrent and Overvoltage Protection
- Resettable Circuit Protection Device for Cost-sensitive Equipment
- Application: Relay and Electromagnetic Valve Protection, VoIP Gateway, Analogy and ISDN Line cards, Security System, Set-top Box
- Compliance to UL1449
- UL/cUL Safety Approved: Certification No: E326004



MECHANICAL DATA

- Lead Material: Copper Clad Steel Wire, AWG20
- UL Flammability Classification 94V-0
- Solderable Characteristics: Per MIL-STD-202, method 208E



ELECTRICAL CHARACTERISTICS

Part Number	Varistor DC Voltage (at 1mA)	Max Continuous Voltage		Max Clamping Voltage (8/20 μ s)		Max Peak Current (8/20 μ s)		Max Energy (2ms)	Abnormal Overvoltage Surge Protection			Typical Capacitance @1kHz
	V _n (V _{DC})	V _{AC}	V _{DC}	V _c	I _P	1x Pulse	15x Pulse	(J)	V _{max}	I _{max}	Typical Reaction Time	(pF)
	(V)	(V _{rms})	(V)	(V)	(A)	(A)	(A)		(V)	(A)	(sec)	
CPV20201KK9*	200(185~225)	130	170	500	100	900	500	28	380	50	20	1900
CPV20221KK9*	220(198~242)	140	180	520	100	900	500	32	380	50	20	1750
CPV20241KK9*	240(216~264)	150	200	540	100	900	500	34	380	50	20	1600
CPV20271KK9*	270(243~297)	175	225	570	100	900	500	38	380	50	20	1400
CPV20301KK9*	300(270~330)	195	250	600	100	900	500	46	380	50	20	1100
CPV20331KK9*	330(297~363)	215	275	630	100	900	500	50	380	50	20	1100
CPV20361KK9*	360(324~396)	230	300	680	100	900	500	54	400	50	20	1100
CPV20391KK9*	390(351~429)	250	320	710	100	900	500	56	480	50	20	1000
CPV20431KK9*	430(387~473)	275	350	750	100	900	500	64	480	50	20	900
CPV20471KK9*	470(423~517)	300	385	790	100	900	500	68	480	50	20	800
CPV20511KK9*	510(459~561)	320	420	840	100	900	500	72	480	50	20	750
CPV20561KK9*	560(504~616)	350	460	915	100	900	500	77	600	50	10	750
CPV20621KK9*	620(558~682)	395	510	1020	100	900	500	85	600	50	10	570
CPV20681KK9*	680(612~748)	420	560	1120	100	900	500	93	690	50	10	550
CPV20751KK9*	750(675~825)	465	615	1235	100	900	500	101	690	50	10	530
CPV20781KK9*	780(702~858)	485	640	1290	100	900	500	105	690	50	10	500

Note: Operating / Storage Temperature: -40°C ~ 85°C. *: Internal control code


Metal Oxide Varistor Current Protected type 20mm

CPV20-K9 Series


MERITEK

CHARACTERISTIC CURVES


Current(Thermal) Characteristics

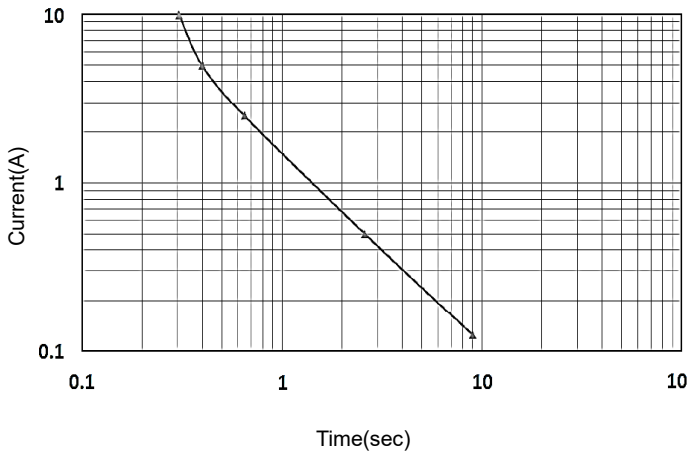

Power Derating

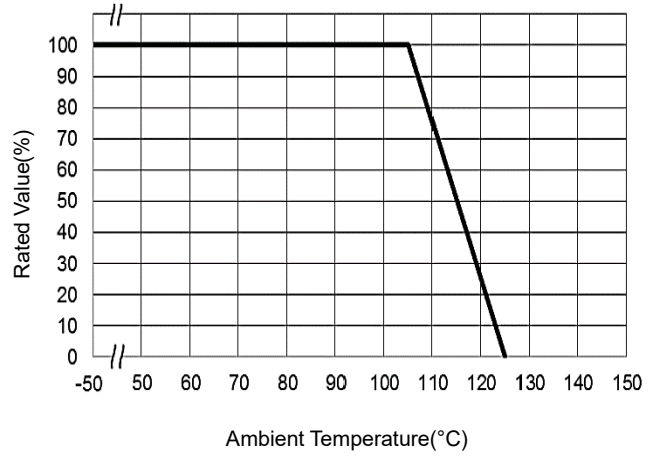

DIMENSIONS

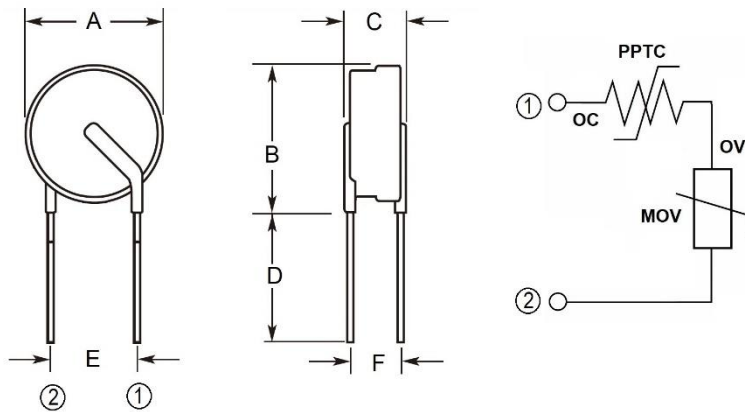

Part Number	A		B		C	D	E		F	
	Min.	Max.	Min.	Max.	Max.	Min.	Min.	Max.	Min.	Max.
CPV20201KK9*	19.0	23.0	23.0	28.0	9.0	25.4	6.5	8.5	2.0	5.0
CPV20221KK9*	19.0	23.0	23.0	28.0	9.0	25.4	6.5	8.5	2.0	5.0
CPV20241KK9*	19.0	23.0	23.0	28.0	9.0	25.4	6.5	8.5	2.0	5.0
CPV20271KK9*	19.0	23.0	23.0	28.0	9.0	25.4	6.5	8.5	2.0	5.0
CPV20301KK9*	19.0	23.0	23.0	28.0	9.5	25.4	6.5	8.5	2.5	5.5
CPV20331KK9*	19.0	23.0	23.0	28.0	9.5	25.4	6.5	8.5	2.5	5.5
CPV20361KK9*	19.0	23.0	23.0	28.0	9.5	25.4	6.5	8.5	2.5	5.5
CPV20391KK9*	19.0	23.0	23.0	28.0	9.5	25.4	6.5	8.5	2.5	5.5
CPV20431KK9*	19.0	23.0	23.0	28.0	9.5	25.4	6.5	8.5	2.5	5.5
CPV20471KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	4.0	7.0
CPV20511KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	4.0	7.0
CPV20561KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	4.0	7.0
CPV20621KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	4.0	7.0
CPV20681KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	4.5	7.5
CPV20751KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	5.0	8.0
CPV20781KK9*	19.0	23.0	23.0	28.0	11.0	25.4	6.5	8.5	5.0	8.0

All Dimensions in mm

Metal Oxide Varistor Current Protected type 20mm

CPV20-K9 Series

MERITEK

PART NUMBERING SYSTEM

CPV 20 201K K9 xx
(1) (2) (3) (4) (5)

No	Item	Code	Description
(1)	Product Code	CPV	Current Protected Metal Oxide Varistor series
(2)	Diameter	20	20: 20mm
(3)	Varistor Voltage	201K	200VDC \pm 10% First two digits: significant, Third: multiplier
(4)	Max Peak Current	K9	K9: 900A, Max Peak Current, 8/20 μ s 1xPulse
(5)	Internal Code	xx	Internal Control or Project Reference

*Specifications subject to change without notice.