


Insulated Gate Bipolar Transistor 650V 80A 283W TO-247

MIG65N80T247

MERITEK


FEATURE

- High Speed Switching Device for Smooth Hard and Soft Switching
- Positive Temperature Coefficient
- High Ruggedness, Temperature Stable
- Application: Solar and Welding Converters, Uninterruptible Power Supplies, Mid to High Range Switching Frequency Converters

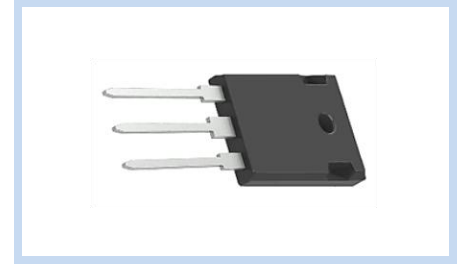

MECHANICAL DATA

- Case: TO-247 Package
- Terminals: Solderable per MIL-STD-750, Method 2026



MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Collector-to-Emitter Breakdown Voltage		V_{CES}	650	V
Gate-to-Emitter Voltage		V_{GE}	± 20	V
Collector Current – Continuous	$T_C=25^{\circ}\text{C}$	I_C	80	A
	$T_C=100^{\circ}\text{C}$		50	
Collector Current – Pulsed	tp limited by T_{Jmax} , $V_{GE}=15\text{V}$	I_{CM}	200	A
Diode Forward Current – Continuous	$T_C=25^{\circ}\text{C}$	I_F	80	A
	$T_C=100^{\circ}\text{C}$		50	
Diode Forward Current – Pulsed		I_{FM}	200	A
Turn off Safe Operating Area	$V_{CE} \leq 650\text{V}$, $T_J \leq 150^{\circ}\text{C}$	-	200	A
Power Dissipation	$T_J=175^{\circ}\text{C}$	P_D	283	W
Thermal Resistance Junction to Case For Diode		$R_{\theta jc}$	1.05	$^{\circ}\text{C/W}$
Thermal Resistance Junction to Case For IGBT		$R_{\theta jc}$	0.53	$^{\circ}\text{C/W}$
Soldering Temperature		T_L	260	$^{\circ}\text{C}$
Operating Junction Temperature Range		T_{Ji}	-40 to 175	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	-55 to 150	$^{\circ}\text{C}$

Note:

1. $T_C = 25^{\circ}\text{C}$ unless otherwise noted

Insulated Gate Bipolar Transistor

650V 80A 283W TO-247

MIG65N80T247

MERITEK

ELECTRICAL CHARACTERISTICS - IGBT

Static Characteristics	Conditions	Symbol	Min	Typ.	Max	Unit
Collector-Emitter Breakdown Voltage	$V_{GE}=0V, I_C=250\mu A$	BV_{CES}	650	--	--	V
Collector-Emitter Leakage Current	$V_{GE} = 0V, V_{CE}=650V$	I_{CES}	--	--	0.25	mA
	$V_{GE} = 0V, V_{CE}=650V, T_J=150^\circ C$		--	--	3	
Gate to Emitter Leakage Current	$V_{GE} = \pm 20V, V_{CE} = 0V$	I_{GES}	--	--	100	nA
Collector-Emitter Saturation Voltage	$V_{GE}=15V, I_C=50A$	$V_{CE(SAT)}$	1.3	1.6	1.9	V
	$V_{GE}=15V, I_C=50A, T_J=125^\circ C$		--	1.8	--	
	$V_{GE}=15V, I_C=50A, T_J=150^\circ C$		--	1.9	--	
Gate Threshold Voltage	$V_{CE}=V_{GE}, I_C=0.5mA$	$V_{GE(th)}$	3.8	4.8	5.8	V
Dynamic Characteristics	Conditions	Symbol	Min	Typ.	Max	Unit
Total Gate Charge	$V_{CC}=520V, V_{GE}=15V, I_C=50A$	Q_g	--	0.14	--	μC
Input Capacitance	$V_{CE}=25V, V_{GE}=0V, F=1MHz$	C_{ies}	--	2.83	--	nF
Reverse Transfer Capacitance		C_{res}	--	0.02	--	
Switching Characteristics	Conditions	Symbol	Min	Typ.	Max	Unit
Turn-On Delay Time	$V_{CC}=400V, V_{GE}=-5V\sim 15V, I_C=50A, R_G=10\Omega, \text{Inductive Load}$	$T_{d(on)}$	--	24	--	ns
Rise Time		T_r	--	31	--	
Turn-Off Delay Time		$T_{d(off)}$	--	74	--	
Fall Time		T_f	--	35	--	
Turn-On Switching Loss		E_{on}	--	2.05	--	mJ
Turn-Off Switching Loss	$V_{CC}=400V, V_{GE}=-5V\sim 15V, I_C=50A, R_G=10\Omega, \text{Inductive Load, } T_J=125^\circ C$	E_{off}	--	0.36	--	
Total Switching Energy		E_{ts}	--	2.47	--	
Turn-On Delay Time		$T_{d(on)}$	--	24	--	ns
Rise Time		T_r	--	42	--	
Turn-Off Delay Time		$T_{d(off)}$	--	82	--	
Fall Time		T_f	--	41	--	
Turn-On Switching Loss	$V_{CC}=400V, V_{GE}=-5V\sim 15V, I_C=50A, R_G=10\Omega, \text{Inductive Load, } T_J=150^\circ C$	E_{on}	--	2.11	--	mJ
Turn-Off Switching Loss		E_{off}	--	0.44	--	
Total Switching Energy		E_{ts}	--	2.56	--	
Turn-On Delay Time		$T_{d(on)}$	--	25	--	ns
Rise Time		T_r	--	48	--	
Turn-Off Delay Time		$T_{d(off)}$	--	88	--	
Fall Time		T_f	--	44	--	
Turn-On Switching Loss		E_{on}	--	2.19	--	mJ
Turn-Off Switching Loss		E_{off}	--	0.47	--	
Total Switching Energy		E_{ts}	--	2.66	--	

Note:

1. $T_J = 25^\circ C$ unless otherwise noted

Insulated Gate Bipolar Transistor 650V 80A 283W TO-247

MIG65N80T247

MERITEK

ELECTRICAL CHARACTERISTICS - DIODE


Switching Characteristics	Conditions	Symbol	Min	Typ.	Max	Unit
Diode Forward Voltage	I _F =50A	V _F	--	1.6	2.0	V
	I _F =50A, T _J =125°C		--	1.5	--	
	I _F =50A, T _J =150°C		--	1.4	--	
Diode Reverse Recovery Time	I _F =50A, V _R =400V, di _F /dt = -450A/μs	t _{rr}	--	148	--	ns
Reverse Recovery Charge		Q _{rr}	--	1.58	--	μC
Reverse Recovery Current		I _{rr}	--	15	--	A
Reverse Recovery Energy		E _{rec}		0.29		mJ
Diode Reverse Recovery Time	I _F =50A, V _R =400V, di _F /dt = -450A/μs, T _J =125°C	t _{rr}	--	183	--	ns
Reverse Recovery Charge		Q _{rr}	--	2.54	--	μC
Reverse Recovery Current		I _{rr}	--	21	--	A
Reverse Recovery Energy		E _{rec}		0.65		mJ
Diode Reverse Recovery Time	I _F =50A, V _R =400V, di _F /dt = -450A/μs, T _J =150°C	t _{rr}	--	218	--	ns
Reverse Recovery Charge		Q _{rr}	--	3.59	--	μC
Reverse Recovery Current		I _{rr}	--	24	--	A
Reverse Recovery Energy		E _{rec}		0.79		mJ

Note:


2. $T_J = 25^{\circ}C$ unless otherwise noted

CHARACTERISTIC CURVES

Output Characteristics ($T_J=25^{\circ}C$)

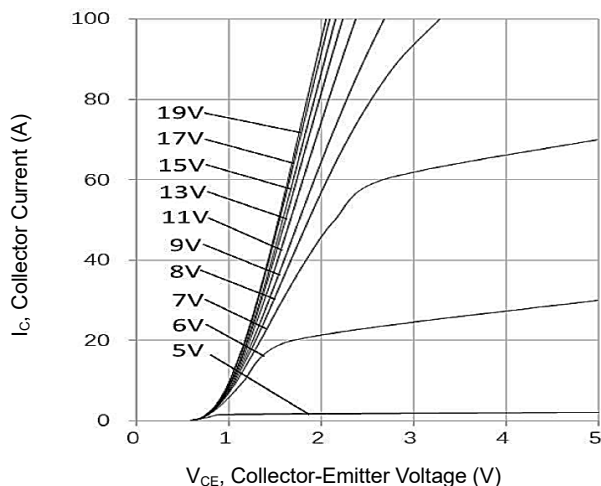

Output Characteristics ($T_J=150^{\circ}C$)

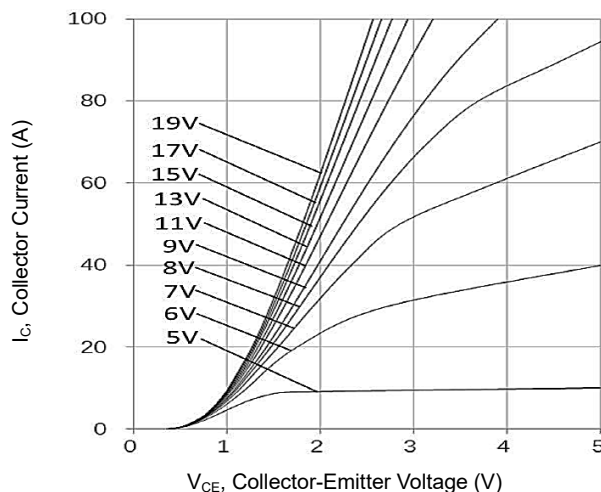

Insulated Gate Bipolar Transistor


650V 80A 283W TO-247

MIG65N80T247


MERITEK

CHARACTERISTIC CURVES


Transfer Characteristics

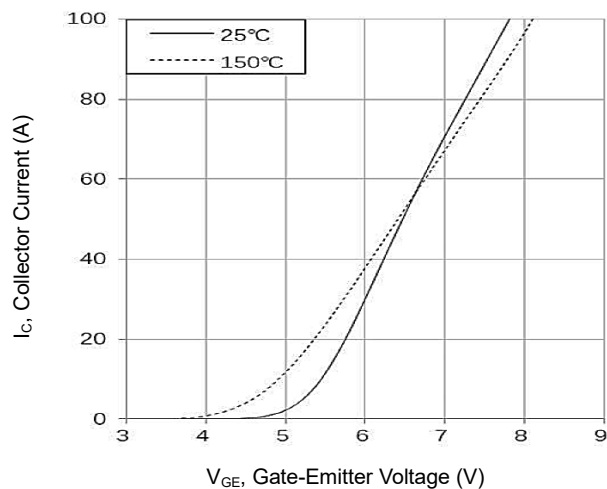


Diode Forward Characteristics

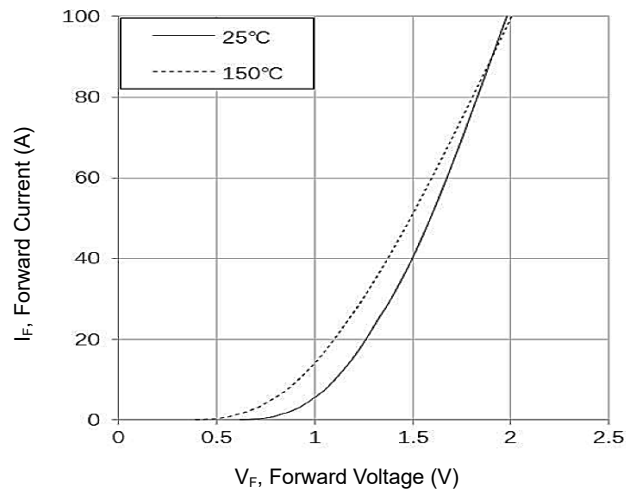


Diode Forward Voltage Variation

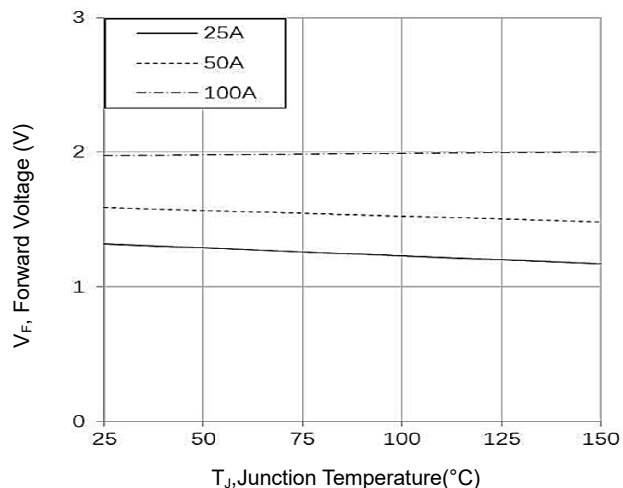


Collector-Emitter Saturation Voltage

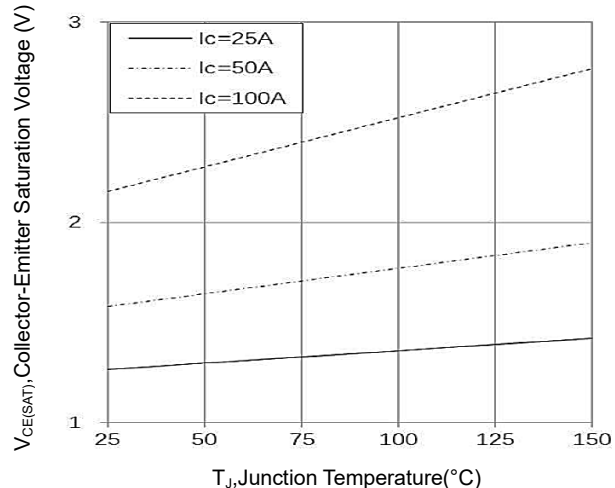

Power Dissipation

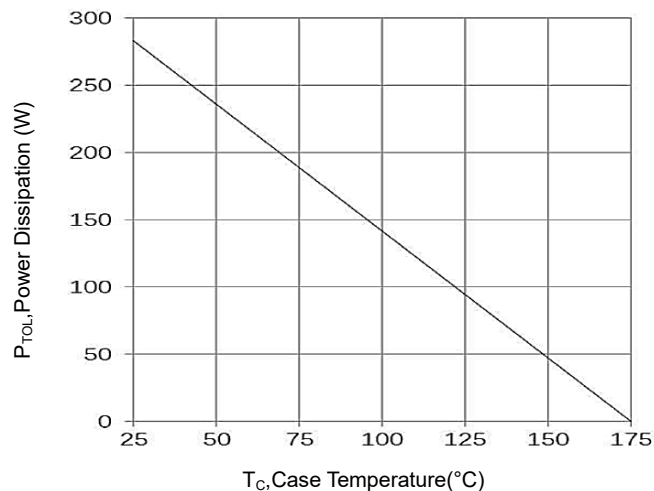

Collector Current

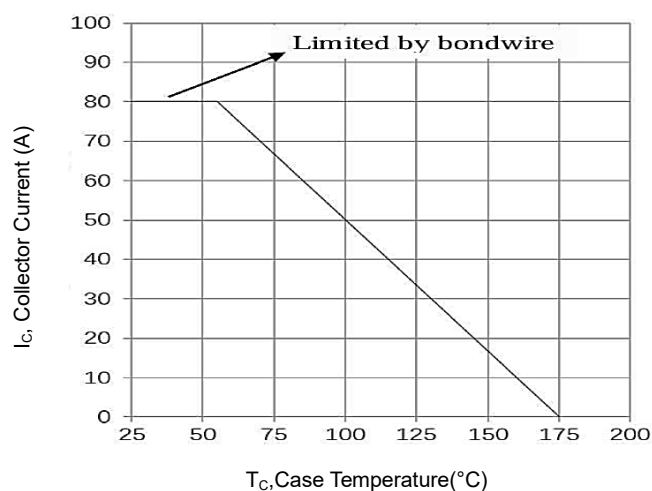

Insulated Gate Bipolar Transistor


650V 80A 283W TO-247

MIG65N80T247


MERITEK

CHARACTERISTIC CURVES


FBSOA

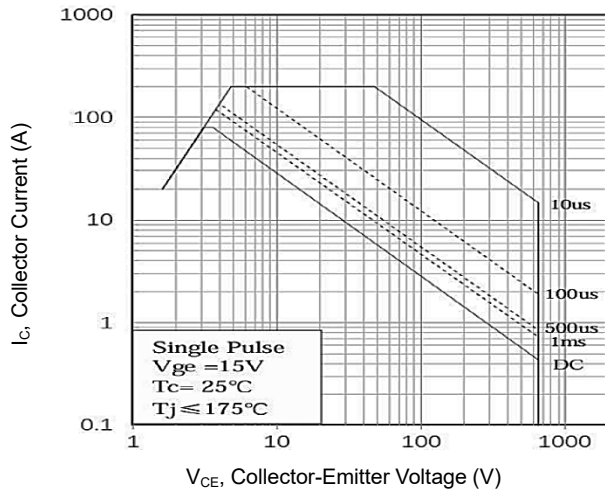


Gate-Emitter Voltage vs Junction Temperature

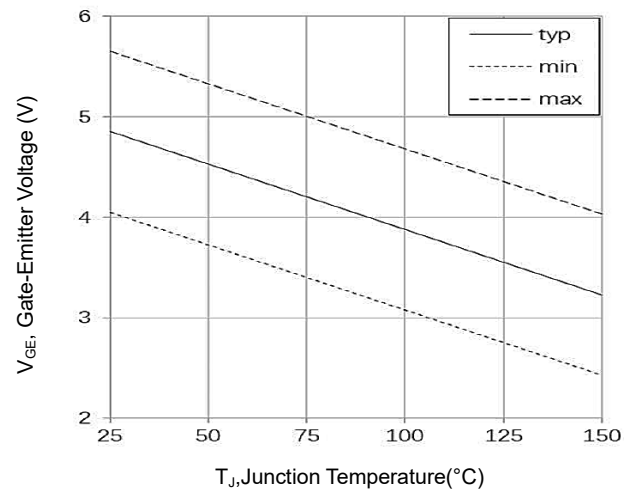


Switching Energy Loss vs Gate Resistances

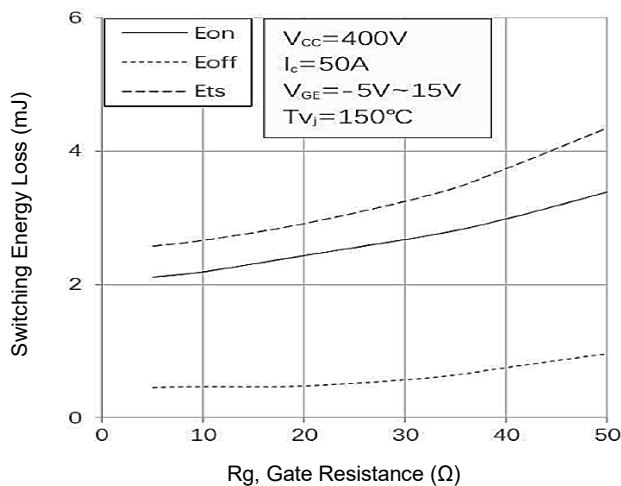


Switching Energy Loss vs Collect Current

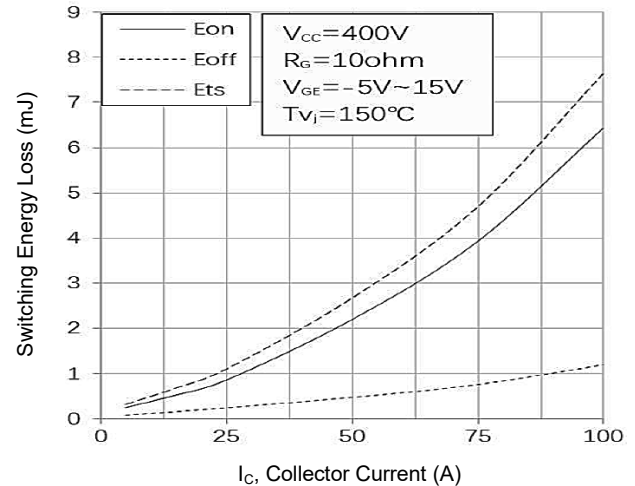

Switching Times vs Gate Resistances

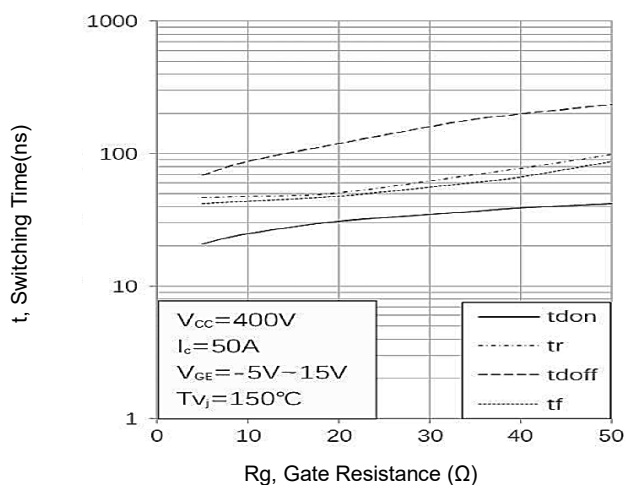

Switching Times vs Collect Current

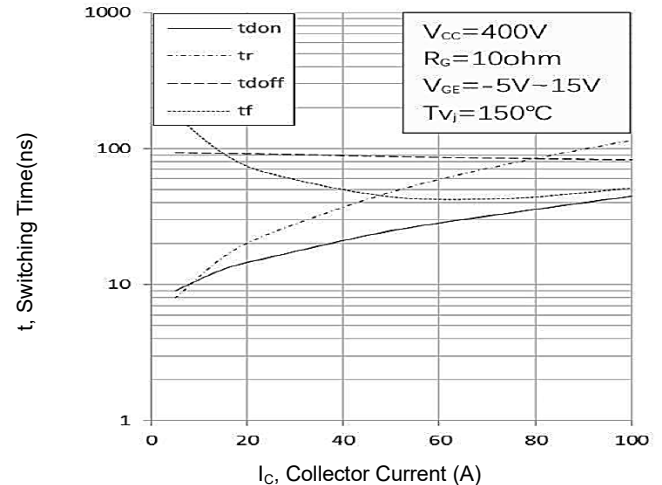

Insulated Gate Bipolar Transistor


650V 80A 283W TO-247

MIG65N80T247


MERITEK

CHARACTERISTIC CURVES


IGBT Transient Thermal Impedance

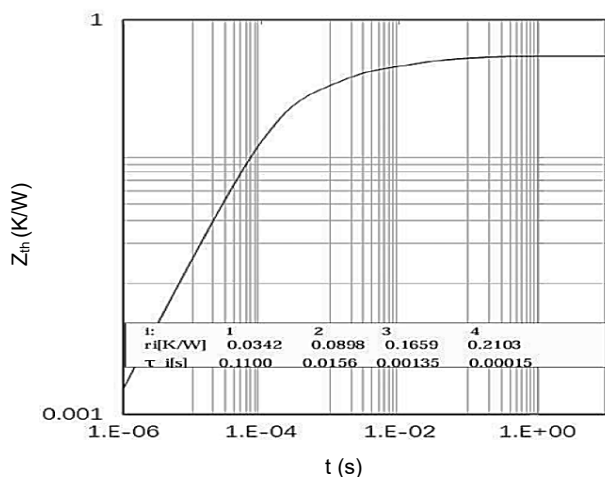


Diode Transient Thermal Impedance

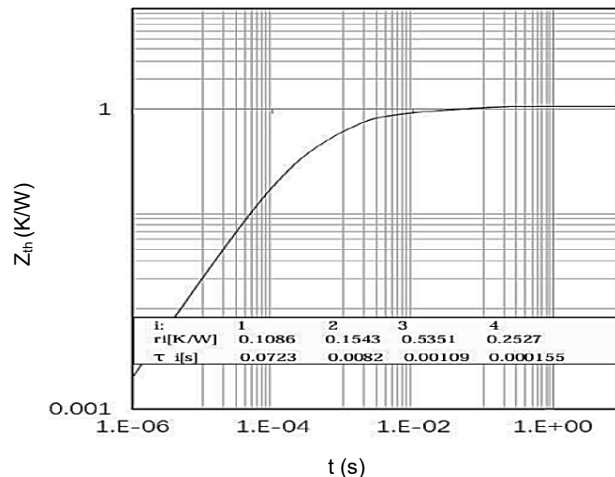


Switching Energy Loss vs Junction Temperature

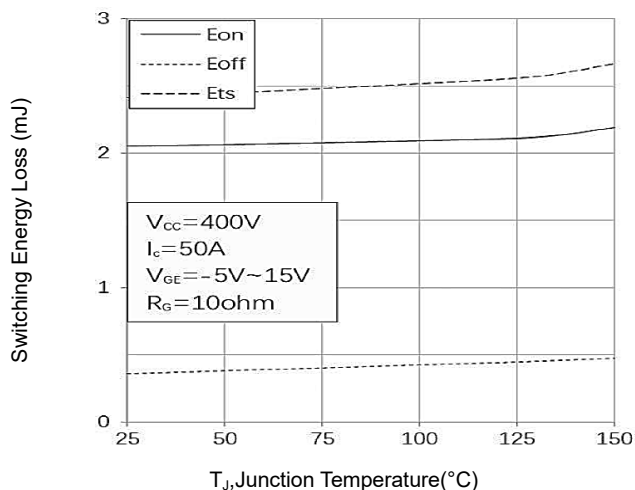

Switching Energy Loss vs Collector-Emitter Voltage

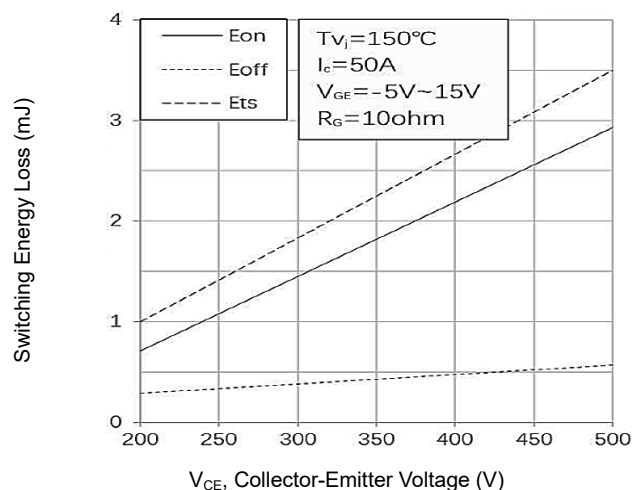

Typical Capacitance

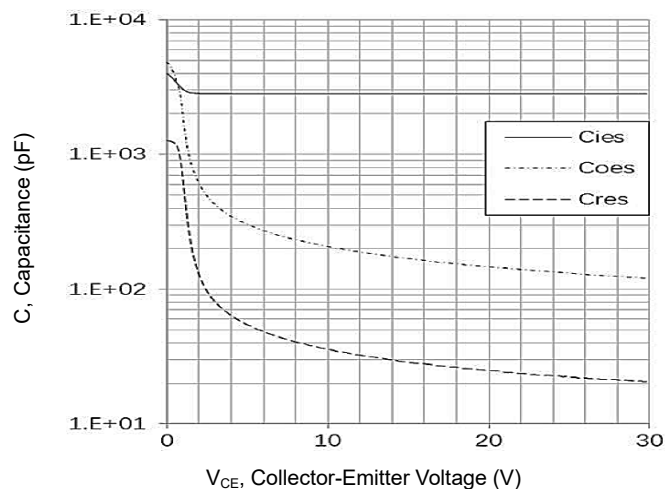

Insulated Gate Bipolar Transistor

650V 80A 283W TO-247

MIG65N80T247

MERITEK

DIMENSIONS

Item	Min (mm)	Max (mm)
A	4.80	5.20
A1	1.85	2.15
A2	2.12	2.61
b	1.00	1.40
b1	2.80	3.20
c	0.50	0.70
D	20.70	21.30
D1	4.80	5.20
E	15.50	16.10
e	5.44 TYP	
e1	10.88 TYP	
L	19.62	20.22
L1	--	4.30
P	3.40	3.80
Q	6.15 TYP	

