

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

FEATURE

- A wide selection of sized is available (0201 to 2225)
- High capacitance in given case size
- Capacitor with lead-free termination (pure Tin)
- RoHS and HALOGEN compliant.
- Application: DC to DC converter. General digital circuit. Power supply bypass capacitors. Consumer electronics. telecommunication



PART NUMBERING SYSTEM




MA (1) **1812** (2) **XR** (3) **102** (4) **C** (5) **250** (6)

No	Item	Digit	Description	Series Reference
(1)	Meritek Series	MA	Meritek low voltage Ceramic Chip Capacitor	Low voltage application with ≤ 50Vdc
(2)	Size	1812	1812 inch (4532 mm)	1206,1210,1808,1825,2211,2220,2225
(3)	Dielectric	XR	X7R	CG: COG(NPO), XR: X7R, XF: X5R, YV: Y5V
(4)	Capacitance	102	102: 10x10 ² pF = 1000pF	103: 10x10 ³ pF, 4R7: 4.7pF
(5)	Tolerance	C	C: ±0.25 pF	D: ±0.50 pF, F: ±1%, G: ±2%, J: ±5%, K: ±10%
(6)	Rated Voltage	250	Working Voltage: 25VDC	6R3: 6.3VDC, 100: 10VDC, 500: 50VDC

DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	Thickness	M _B min (mm)
			T (mm) code	
0201 (0603)	0.60±0.05	0.30±0.05	See Thickness Specification Reference Table below	0.15±0.05
0402 (1005)	1.00±0.15/-1.0	0.50±0.15/-1.0		0.25±0.05/-0.10
0603 (1608)	1.60±0.20	0.80±0.15		0.40±0.15
0805 (2012)	2.10±0.20	1.25±0.20		0.50±0.20
1206 (3216)	3.30±0.30	1.60±0.30/-0.10		0.60±0.20
1210 (3225)	3.30±0.40	2.50±0.30		0.75±0.35
1808 (4520)	4.60±0.50	2.00±0.20		0.75±0.35
1812 (4532)	4.60±0.50	3.20±0.30		0.75±0.35
1825 (4563)	4.60±0.50	6.30±0.40		0.75±0.35
2220 (5750)	5.70±0.50	5.00±0.40		0.85±0.35
2225 (5763)	5.70±0.50	6.30±0.40		0.85±0.35

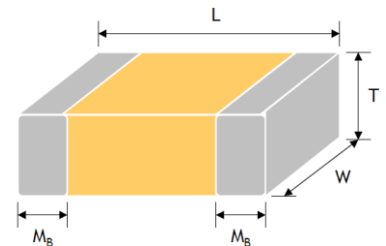

THICKNESS SPECIFICATION REFERENCE

Code	Thickness (mm)	Code	Thickness (mm)	Code	Thickness (mm)
A	0.60 ± 0.10	I	1.25 ± 0.20	Q	0.50 + 0.02/-0.05
B	0.8 + 0.15/-0.10	J	1.15 ± 0.15	R	3.10 ± 0.30
C	1.25 ± 0.10	K	0.50 ± 0.20	S	0.80 ± 0.07
D	1.40 ± 0.15	L	0.30 ± 0.03	T	0.85 ± 0.10
E	1.60 ± 0.20	M	0.95 ± 0.10	U	0.50 ± 0.10
F	2.00 ± 0.20	N	0.50 ± 0.05	V	0.20 ± 0.02
G	2.50 ± 0.30	O	3.50 ± 0.20	X	0.80 ± 0.10
H	2.80 ± 0.30	P	1.60 +0.3/-0.10	Z	0.25 ± 0.03

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

ELECTRICAL CHARACTERISTICS

Properties	Characteristics			
Dielectric	C0G(NPO)	X7R	Y5V	X5R
Chip Size	0201, 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0201, 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0402, 0603, 0805, 1206, 1210, 1812	0201, 0402, 0603
Rated Voltage	10V, 16V, 25V, 50V	10V, 16V, 25V, 50V	6.3V, 10V, 16V, 25V, 50V	10V, 16V, 25V, 50V
Capacitance Range	0.1pF ~ 150nF	100pF ~ 820nF	10nF ~ 820nF	100pF ~ 820nF
Capacitance Tolerance	See Capacitance Tolerance Reference Table Below			
Dissipation Factor	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	See Dissipation Factor Table Below		
Insulation Resistance	≥10GΩ	≥10GΩ or R•C≥100Ω•F Whichever is smaller		
Operation Temperature	-55°C ~ +125°C		-25 to +85°C	55 to +85°C
Temperature Coefficient	±30ppm/°C	±15%	+30/-80%	±15%
Termination	Cu (or Ag)/Ni/Sn (lead-free termination)			

CAPACITANCE TOLERANCE REFERENCE

Code	Description	Code	Description	Code	Description	Code	Description
A	±0.05 pF	F	±1 %	J	±5 %	N	-5%~10%
B	±0.10 pF	G	±2 %	K	±10 %	P	±0.02 pF
C	±0.25 pF	H	±3 %	L	0%~10%	Q	±0.03 pF
D	±0.50 pF	I	-10%~0%	M	±20 %	Z	-20%~80%

DISSIPATION FACTOR

X7R/X5R

Rated Vol. (V)	D.F.	Exception of D.F.	
≥50	≤2.5%	≤3%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF
25	≤3.5%	≤5%	0805≥1μF; 1210≥10μF
		≤7%	0603≥0.33μF
16	≤3.5%	≤5%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF
		≤10%	1210≥22μF; 0603≥0.68μF
10	≤5.0%	≤10%	0603≥1μF; 0805≥2.2μF

X5R

Rated Vol. (V)	D.F.	Exception of D.F. (μF)	
≥50	≤5.0%	≤7.0%	0603≥0.047μF; 0805≥0.18μF
25	≤5.0%	≤7.0%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF
		≤9.0%	0402≥0.068μF; 0603≥0.47μF
16 (C<1.0μF)	≤7.0%	≤9.0%	0402≥0.068μF; 0603≥0.68μF
16 (C≥1.0μF)	≤9.0%	≤12.5%	0805≥4.7μF; 1206≥10μF; 1210≥22μF; 1812≥47μF
10	≤12.5%	---	---

* Measured at the condition of 30~70% related humidity.

* C0G(NPO): Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature

* X7R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.

* Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20°C ambient temperature.

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

CAPACITANCE RANGE

COG (NPO) Dielectric (0201~1206)

Dimension		0201			0402				0603				0805				1206			
Cap(pF)	code	10V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
0.1	0R1	L	L	L	N	N	N	N												
0.2	0R2	L	L	L	N	N	N	N												
0.3	0R3	L	L	L	N	N	N	N												
0.4	0R4	L	L	L	N	N	N	N												
0.5	0R5	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A				
1	1R0	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A				X
1.2	1R2	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
1.5	1R5	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
1.8	1R8	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
2.2	2R2	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
2.7	2R7	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
3.3	3R3	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
3.9	3R9	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
4.7	4R7	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
5.6	5R6	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
6.8	6R8	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
8.2	8R2	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
10	100	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
12	120	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
15	150	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
18	180	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
22	220	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
27	270	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
33	330	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
39	390	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
47	470	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
56	560	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
68	680	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
82	820	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
100	101	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
120	121	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
150	151				N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
180	181				N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
220	221				N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
270	271		L		N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
330	331		L		N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X
390	391		L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
470	471		L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
560	561		L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
680	681				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
820	821				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1000	102				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1200	122								B	B	B	B	X	X	X	X	X	X	X	X
1500	152								B	B	B	B	X	X	X	X	X	X	X	X
1800	182								B	B	B	B	X	X	X	X	X	X	X	X
2200	222								B	B	B	B	X	X	X	X	X	X	X	X
2700	272								B	B	B	B	C	C	C	C	X	X	X	X
3300	332								B	B	B	B	C	C	C	C	X	X	X	X
3900	392								B	B	B	B	C	C	C	C	X	X	X	X
4700	472								B	B	B	B	C	C	C	C	X	X	X	X
5600	562								B	B	B	B	C	C	C	C	X	X	X	X
6800	682								B	B	B	B	C	C	C	C	M	M	M	M
8200	822								B	B	B	B	C	C	C	C	C	C	C	C
10000	103								B	B	B	B	C	C	C	C	C	C	C	C
12000	123												T	T	T	T	T	T	T	T
15000	153												T	T	T	T	T	T	T	T
18000	183												C	C	C	C	T	T	T	T

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

CAPACITANCE RANGE (CONTINUED)

COG (NPO) Dielectric(0201~1206)

Dimension		0201			0402				0603				0805				1206			
Cap(pF)	code	10V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
22000	223												C	C	C	C	T	T	T	T
27000	273																T	T	T	T
33000	333																T	T	T	T
39000	393																J	J	J	J
47000	473																J	J	J	J
56000	563																J	J	J	J
68000	683																E	E	E	E
82000	823																E	E	E	E
100000	104																E	E	E	E
120000	124																			
150000	154																			
180000	184																			
220000	224																			

COG (NPO) Dielectric(1210~2225)

Dimension		1210				1808	1812				1825	2220	2225
Cap(pF)	code	10V	16V	25V	50V	50V	10V	16V	25V	50V	50V	50V	50V
0.1	0R1												
0.2	0R2												
0.3	0R3												
0.4	0R4												
0.5	0R5												
1	1R0												
1.2	1R2												
1.5	1R5												
1.8	1R8												
2.2	2R2					C							
2.7	2R7					C							
3.3	3R3					C							
3.9	3R9					C							
4.7	4R7					C							
5.6	5R6					C							
6.8	6R8					C							
8.2	8R2					C							
10	100	M	M	M	M	C	C	C	C	C	E	E	E
12	120	M	M	M	M	C	C	C	C	C	E	E	E
15	150	M	M	M	M	C	C	C	C	C	E	E	E
18	180	M	M	M	M	C	C	C	C	C	E	E	E
22	22	220	M	M	M	M	C	C	C	C	C	E	E
27	27	270	M	M	M	M	C	C	C	C	C	E	E
33	33	330	M	M	M	M	C	C	C	C	C	E	E
39	39	390	M	M	M	M	C	C	C	C	C	E	E
47	47	470	M	M	M	M	C	C	C	C	C	E	E
56	56	560	M	M	M	M	C	C	C	C	C	E	E
68	68	680	M	M	M	M	C	C	C	C	C	E	E
82	82	820	M	M	M	M	C	C	C	C	C	E	E
100	100	101	M	M	M	M	C	C	C	C	C	E	E
120	120	121	M	M	M	M	C	C	C	C	C	E	E
150	150	151	M	M	M	M	C	C	C	C	C	E	E
180	180	181	M	M	M	M	C	C	C	C	C	E	E
220	220	221	M	M	M	M	C	C	C	C	C	E	E
270	270	271	M	M	M	M	C	C	C	C	C	E	E
330	330	331	M	M	M	M	C	C	C	C	C	E	E
390	390	391	M	M	M	M	C	C	C	C	C	E	E
470	470	471	M	M	M	M	C	C	C	C	C	E	E
560	560	561	M	M	M	M	C	C	C	C	C	E	E

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

CAPACITANCE RANGE (CONTINUED)

COG (NPO) Dielectric(1210~2225)

Dimension		1210				1808	1812				1825	2220	2225
Cap(pF)	code	10V	16V	25V	50V	50V	10V	16V	25V	50V	50V	50V	50V
680	681	M	M	M	M	C	C	C	C	C	E	E	E
820	821	M	M	M	M	C	C	C	C	C	E	E	E
1000	102	M	M	M	M	C	C	C	C	C	E	E	E
1200	122	M	M	M	M	C	C	C	C	C	E	E	E
1500	152	M	M	M	M	C	C	C	C	C	E	E	E
1800	182	M	M	M	M	C	C	C	C	C	E	E	E
2200	222	M	M	M	M	C	C	C	C	C	E	E	E
2700	272	M	M	M	M	C	C	C	C	C	E	E	E
3300	332	M	M	M	M	C	C	C	C	C	E	E	E
3900	392	M	M	M	M	C	C	C	C	C	E	E	E
4700	472	M	M	M	C	C	C	C	C	C	E	E	E
5600	562	M	M	M	C	C	C	C	C	C	E	E	E
6800	682	M	M	M	E	C	C	C	C	C	E	E	E
8200	822	M	M	M	E	C	C	C	C	C	E	E	E
10000	103	M	M	M	E	C	C	C	C	C	E	E	E
12000	123	C	C	C	E	E	C	C	C	C	E	E	E
15000	153	C	C	C	E	E	C	C	C	C	E	E	E
18000	183				F	F	C	C	C	C	E	E	E
22000	223				F	F	C	C	C	C	E	E	E
27000	273				G	F	C	C	C	C	E	E	E
33000	333				G		C	C	C	C	E	E	E
39000	393				G					F	E	E	E
47000	473				G					F	E	E	E
56000	563									G	E	E	E
68000	683									G	E	F	E
82000	823									G	F	G	F
100000	104									G	G	G	F
120000	124										G	G	G
150000	154											G	G
180000	184											G	G
220000	224												G
270000	274												G

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

CAPACITANCE RANGE

X7R Dielectric (0201~1206)

Dimension		0201				0402				0603				0805				1206			
Cap(pF)	Code	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
100	101	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X				X
120	121	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X				X
150	151	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
180	181	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
220	221	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
270	271	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
330	331	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
390	391	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
470	471	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
560	561	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
680	681	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
820	821	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1000	102	L	L	L	L	N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1200	122	L	L	L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1500	152	L	L	L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
1800	182	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
2200	222	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
2700	272	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
3300	332	L	L	L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
3900	392	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
4700	472	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
5600	562	L				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
6800	682	L				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
8200	822	L				N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
10000	103	L	L			N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
12000	123					N	N	N		S	S	S	S	X	X	X	X	X	X	X	X
15000	153					N	N	N		S	S	S	S	X	X	X	X	X	X	X	X
18000	183					N	N	N		S	S	S	S	X	X	X	X	X	X	X	X
22000	223					N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X
27000	273					N	N	N		S	S	S	S	X	X	X	X	X	X	X	X
33000	333					N	N	N	N	S	S	S	B	X	X	X	X	X	X	X	X
39000	393					N	N	N		S	S	S	B	X	X	X	X	X	X	X	X
47000	473					N	N	N	N	S	S	S	B	X	X	X	X	X	X	X	X
56000	563					N	N	N	N	S	S	S	B	X	X	X	X	X	X	X	X
68000	683					N	N		N	S	S	S	B	X	X	X	X	X	X	X	X
82000	823					N	N			S	S	S	B	X	X	X	X	X	X	X	X
100000	104					N	N	N	N	S	S	S	B	X	X	X	X	X	X	X	X
120000	124									S	S	B		X	X	X	C	X	X	X	X
150000	154									S	S	B		C	C	C	C	M	M	M	M
180000	184									S	S	B		C	C	C	C	M	M	M	M
220000	224					N	N	N		S	S	B	B	C	C	C	C	M	M	M	M
270000	274									B	B	B		C	C	C	I	M	M	M	C
330000	334									B	B	B		C	C	C	I	M	M	M	C
390000	394									B	B	B		C	C	C	I	M	M	J	P
470000	474					N				B	B	B	B	C	C	C	I	J	J	J	P
560000	564									B	B			C	C	C		J	J	J	P
680000	684									B	B			C	C	C		J	J	J	P
820000	824									B	B			C	C	C		J	J	J	P

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

CAPACITANCE RANGE (CONTINUED)

X7R Dielectric (1210~2225)

Dimension		0805				1206				1210				1808	1812				1825	2220	2225
Cap(pF)	Code	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	50V	10V	16V	25V	50V	50V	50V	50V
100	101	X	X	X	X				X												
120	121	X	X	X	X				X												
150	151	X	X	X	X	X	X	X	X					C							
180	181	X	X	X	X	X	X	X	X					C							
220	221	X	X	X	X	X	X	X	X				M	C							
270	271	X	X	X	X	X	X	X	X				M	C				C			
330	331	X	X	X	X	X	X	X	X				M	C				C			
390	391	X	X	X	X	X	X	X	X				M	C				C			
470	471	X	X	X	X	X	X	X	X				M	C				C			
560	561	X	X	X	X	X	X	X	X				M	C				C			
680	681	X	X	X	X	X	X	X	X				M	C				C			
820	821	X	X	X	X	X	X	X	X				M	C				C			
1000	102	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
1200	122	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
1500	152	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
1800	182	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
2200	222	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
2700	272	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
3300	332	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
3900	392	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
4700	472	X	X	X	X	X	X	X	X	M	M	M	M	C	C	C	C	C	F	F	F
5600	562	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
6800	682	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
8200	822	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
10000	103	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
12000	123	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
15000	153	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
18000	183	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
22000	223	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
27000	273	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
33000	333	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
39000	393	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
47000	473	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
56000	563	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
68000	683	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
82000	823	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
100000	104	X	X	X	X	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
120000	124	X	X	X	C	X	X	X	X	M	M	M	M	E	C	C	C	C	F	F	F
150000	154	C	C	C	C	M	M	M	M	M	M	M	M	E	C	C	C	C	F	F	F
180000	184	C	C	C	C	M	M	M	M	M	M	M	M	E	C	C	C	C	F	F	F
220000	224	C	C	C	C	M	M	M	M	M	M	M	M	E	C	C	C	C	F	F	F
270000	274	C	C	C	I	M	M	M	C	M	M	M	M	F	C	C	C	C	F	F	F
330000	334	C	C	C	I	M	M	M	C	M	M	M	C	F	C	C	C	C	F	F	F
390000	394	C	C	C	I	M	M	J	P	M	M	M	C	F	C	C	C	C	F	F	F
470000	474	C	C	C	I	J	J	J	P	M	M	M	C	F	C	C	C	C	F	F	F
560000	564	C	C	C		J	J	J	P	C	C	C	C	F	C	C	C	C	F	F	F
680000	684	C	C	C		J	J	J	P	C	C	C	C	F	C	C	C	F	F	F	F
820000	824	C	C	C		J	J	J	P	C	C	C	C	F	C	C	C	F	F	F	F

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

X5R Dielectric (0201~0603)

Dimension		0201					0402					0603				
Cap (nF)	Code	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
0.10	101			L	L	L										
0.12	121			L	L	L										
0.15	151			L	L	L										
0.18	181			L	L	L										
0.22	221			L	L	L										
0.27	271			L	L	L										
0.33	331			L	L	L										
0.47	471			L	L	L										
0.56	561			L	L	L										
0.68	681			L	L	L										
0.82	821			L	L	L										
1.0	102		L	L	L	L										
1.5	152		L	L												
2.2	222		L	L												
3.3	332		L	L												
4.7	472		L	L												
6.8	682		L	L												
10	103	L	L	L	L											
27	273	L	L						N							
33	333	L	L						N							
39	393	L	L						N							
47	473	L	L						N							
56	563	L	L					N	N							
68	683	L	L					N	N							
82	823	L	L				N	N	N							
100	104	L	L	L	L		N	N	N	N	N			S		
150	154						N	N	N	N	N					
220	224	L	L				N	N	N	N	N		B	B	B	B
270	274							N					B	B	B	
330	334						N	N				B	B	B	B	
390	394											B	B	B	B	
470	474	L					N	N	K	K	K	B	B	B	B	B
680	684						N	N				B	B	B	B	
820	824											B	B	B		

Y5V Dielectric (0402~0805)

Dimension		0402				0603					0805			
Cap (nF)	Code	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V
10	103	N	N	N	N		S	S	S	S	A	A	A	A
15	153	N	N	N	N		S	S	S	S	A	A	A	A
22	223	N	N	N	N		S	S	S	S	A	A	A	A
33	333	N	N	N	N		S	S	S	S	A	A	A	A
47	473	N	N	N			S	S	S	S	A	A	A	A
68	683	N	N	N			S	S	S	S	A	A	A	A
100	104	N	N	N			S	S	S	S	A	A	A	A
150	154	N	N				S	S	S	S	A	A	A	A
220	224	N	N			S	S	S	S	S	A	A	A	A
330	334	N	N			S	S	S	S	B	X	X	X	X
470	474	N	N			S	S	S	B	B	X	X	X	X/C
680	684	N				S	S	B	B		X	X	C	C

Y5V Dielectric (1206~1812)

Dimension		1206				1210				1812			
Cap (nF)	Code	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
10	103	X	X	X	X								
15	153	X	X	X	X								
22	223	X	X	X	X								
33	333	X	X	X	X								
47	473	X	X	X	X								
68	683	X	X	X	X								
100	104	X	X	X	X	M	M	M	M	C	C	C	C
150	154	X	X	X	X	M	M	M	M	C	C	C	C
220	224	X	X	X	X	M	M	M	M	C	C	C	C
330	334	X	X	X	X	M	M	M	M	C	C	C	C
470	474	X	X	X	X	M	M	M	M	C	C	C	C
680	684	X	X	X	X	M	M	M	M	C	C	C	C

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

RELIABILITY TEST CONDITIONS AND REQUIREMENTS

Item	Test Condition		Requirements			
Visual and Dimensions	- - -		* No remarkable defect. * Dimensions to confirm to individual specification sheet.			
Capacitance	Class I: NP0 Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% Class II: X7R,X7E, X5R,Y5V Cap≤10μF, 1.0±0.2Vrms, 1kHz±10% Cap>10μF, 0.5±0.2Vrms, 120Hz±20%		* Shall not exceed the limits given in the detailed spec.			
Q/ D.F. (Dissipation Factor)	Test condition: 0.5 ± 0.2Vrms, 1KHz ± 10% X7R: 0603 ≧ 225(10V), 0805=106(6.3V&10V) X5R: 01R5 ≧ 103, 0201 ≧ 224 (6.3V), 0402 ≧ 475 (6.3V), 0402 ≧ 225(10V), 0603=106 (6.3V), 0603 ≧ 475(10V)		* NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C * 7R, X5R:			
	Rated Vol. (V)	X7R D.F.≤	X5R D.F.≤	Exception of D.F. ≤		
	≥50	2.5%	≤3.0%	0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF		
≤5.0%			1210≧4.7μF			
≤10%			0603≧1μF; 0805≧1μF; 1206≧4.7μF; 1210≧10μF			
	35	3.5%	≤10%	0805≥2.2μF; 1210≧10μF		
	25	3.5%	≤5.0%	0201≧0.01μF; 0805≧1μF; 1210≧10μF		
≤7.0%			0603≧0.33μF; 1206≧4.7μF			
≤10%			0402≧0.10μF; 0603≧0.47μF; 0805≧2.2μF; 1206≧6.8μF; 1210≧22μF			
	16	3.5%	≤5.0%	0201≧0.01μF; 0402≧0.033μF; 0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF		
≤10%			0402≧0.47uF; 0603≧0.68μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF			
	10	5.0%	≤10%	0402≧0.33μF; 0603≧0.33μF; 08052.2μF; 1206≧2.2μF; 1210≧22μF		
≤15%			0201≧0.1μF; 0402≧1μF			
	6.3	10%	≤15%	0201≧0.1μF; 0402≧1μF;0603≧10μF; 0805≧4.7μF; 1206≧47μF; 1210≧100μF		
≤20%			0402≧2.2μF			
	4	15%	---	---		
	* Y5V:					
	Rated Vol. (V)	D.F.≤	Exception of D.F. ≤			
	≥50	5.0%	≤7.0%	0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF		
	35	7.0	---	---		
	25	5.0%	7.0%	0402≧0.047μF; 0603≧0.1μF; 0805≧0.33μF; 1206≧1μF; 1210≧4.7μF		
9.0%			0402≧0.068μF; 0603≧0.47μF; 1206≧4.7μF; 1210≧22μF			
	16 (C<1.0 μF)	7.0%	9.0%	0402≧0.068μF; 0603≧0.68μF		
			12.5%	0402≧0.22μF		
	16 (C<1.0 μF)	9.0%	12.5%	0603≧2.2μF; 0805≧3.3μF; 1206≧10μF; 1210≧22μF; 1812≧47μF		
	10	12.5%	20%	0402≧0.47μF		
	6.3	20%	---	---		
Temperature Coefficient	With no electrical load.					
	T.C.	Operation Temp.				
	C0G(NPO)	-55~125°C at 25°C				
	X7R	-55~125°C at 25°C				
	X5R	-55~85°C at 25°C				
	Y5V	-25~85°C at 20°C				
		T.C.	Capacitance Change			
	C0G(NPO)	Within ±30ppm/°C				
	X7R	Within ±15%				
	X5R	Within ±15%				
	Y5V	Within +30%/-80%				

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

RELIABILITY TEST CONDITIONS AND REQUIREMENTS (CONTINUED)

Insulation Resistance	To apply rated voltage for max. 120 sec.	10GΩ or RxC ≥ 500Ω·F whichever is smaller. Class II (X7R, X5R, Y5V) <table><tr><th>Rated Voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC ≥ 100 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210 ≥ 10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V: 4V</td></tr></table>	Rated Voltage	Insulation Resistance	100V: X7R	10GΩ or RxC ≥ 100 Ω·F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210 ≥ 10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V: 4V					
Rated Voltage	Insulation Resistance																
100V: X7R	10GΩ or RxC ≥ 100 Ω·F whichever is smaller.																
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																	
35V: 0805≥2.2μF; 1210 ≥ 10μF																	
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																	
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																	
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																	
6.3V: 4V																	
Solderability	* Solder temperature: 235±5°C for (1206~1210) * Solder temperature: 245±5°C for (1808~2225) * Dipping time: 2±0.5 sec.	* 75% min. coverage of all metalized area.															
Dielectric Strength	* To apply voltage (≤50V) 250%. * Duration: 1 to 5 sec. * Charge and discharge current less than 50mA.	* No evidence of damage or flashover during test.															
Resistance to Soldering Heat	* Solder temperature: 260±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr. and then set for 48±4 hrs. at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap change: NP0: within ±2.5% or ±0.25pF whichever is larger. X7R, X5R: within ±7.5% Y5V: within ±20% * 25% max. leaching on each edge.															
Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. Operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table> * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. Operating temp. +3/-0	30±3	4	Room temp.	2~3	* No remarkable damage. * Cap change: NP0: within ±2.5% or ±0.25pF whichever is larger. X7R, X5R: within ±7.5% Y5V: within ±20% * 25% max. leaching on each edge. * Q/D.F.≤ initial requirement * I.R.≥ 0.25×initial requirements.
Step	Temp. (°C)	Time (min.)															
1	Min. operating temp. +0/-3	30±3															
2	Room temp.	2~3															
3	Max. Operating temp. +3/-0	30±3															
4	Room temp.	2~3															

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

RELIABILITY TEST CONDITIONS AND REQUIREMENTS (CONTINUED)

Humidity (Damp Heat) Steady State	* Test temp.: 40±2°C	* No remarkable damage.																																													
	* Humidity: 90~95% RH		* Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X7E, X5R: ≥10V**,within ±12.5%;6.3V within ±25%; TT series & C≥ 1uF,within ±25%																																												
	* Test time: 500+24/-0hrs.		**10V:0603 ≥ 4.7μF;0402 ≥ 1μF;0201 ≥ 0.1μF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40%																																												
	* To apply voltage :rated voltage		* Q/D.F. value: NP0: More than 30pF, Q≥350, 10pF≤C≤30pF, Q≥275+2.5C Less than 10pF Q≥200+10C																																												
	* Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).		* X7R, X5R:																																												
			<table><tr><th>Rated Vol. (V)</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="3">≥50</td><td rowspan="3">3.0%</td><td>6.0%</td><td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>10%</td><td>1210≥4.7μF</td></tr><tr><td>20%</td><td>0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF</td></tr><tr><td>35</td><td>5.0%</td><td>20%</td><td>0805≥2.2μF; 1210≥10μF</td></tr><tr><td rowspan="3">25</td><td rowspan="3">5.0%</td><td>10%</td><td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td></tr><tr><td>14%</td><td>0603≥0.33μF; 1206≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF</td></tr><tr><td rowspan="2">16</td><td rowspan="2">5.0%</td><td>10%</td><td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.47uF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td rowspan="2">10</td><td rowspan="2">7.5%</td><td>15%</td><td>0402≥0.33μF; 0603≥0.33μF; 08052.2μF; 1206≥2.2μF; 1210≥22μF</td></tr><tr><td>20%</td><td>0201≥0.1μF; 0402≥1μF</td></tr><tr><td>6.3</td><td>15.0%</td><td>30%</td><td>0201≥0.1μF; 0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF</td></tr><tr><td>4</td><td>20.0%</td><td>---</td><td>---</td></tr></table>	Rated Vol. (V)	D.F. ≤	Exception of D.F. ≤		≥50	3.0%	6.0%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	10%	1210≥4.7μF	20%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF	35	5.0%	20%	0805≥2.2μF; 1210≥10μF	25	5.0%	10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF	14%	0603≥0.33μF; 1206≥4.7μF	15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF	16	5.0%	10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	15%	0402≥0.47uF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF	10	7.5%	15%	0402≥0.33μF; 0603≥0.33μF; 08052.2μF; 1206≥2.2μF; 1210≥22μF	20%	0201≥0.1μF; 0402≥1μF	6.3	15.0%	30%	0201≥0.1μF; 0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF	4	20.0%	---	---
	Rated Vol. (V)		D.F. ≤	Exception of D.F. ≤																																											
	≥50		3.0%	6.0%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																										
				10%	1210≥4.7μF																																										
				20%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF																																										
35	5.0%	20%	0805≥2.2μF; 1210≥10μF																																												
25	5.0%	10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																												
		14%	0603≥0.33μF; 1206≥4.7μF																																												
		15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF																																												
16	5.0%	10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																												
		15%	0402≥0.47uF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF																																												
10	7.5%	15%	0402≥0.33μF; 0603≥0.33μF; 08052.2μF; 1206≥2.2μF; 1210≥22μF																																												
		20%	0201≥0.1μF; 0402≥1μF																																												
6.3	15.0%	30%	0201≥0.1μF; 0402≥1μF;0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF																																												
4	20.0%	---	---																																												
	* Y5V:																																														
	<table><tr><th>Rated Vol. (V)</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥50</td><td>7.5%</td><td>10%</td><td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td></tr><tr><td>35</td><td>10%</td><td>---</td><td>---</td></tr><tr><td rowspan="2">25</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF</td></tr><tr><td>15%</td><td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td></tr><tr><td>16 (C<1.0μF)</td><td>10%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td></td><td></td><td>20%</td><td>0402≥0.22μF</td></tr><tr><td>16 (C<1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td></tr><tr><td>10</td><td>20%</td><td>30%</td><td>0402≥0.47μF</td></tr><tr><td>6.3</td><td>30%</td><td>---</td><td>---</td></tr></table>	Rated Vol. (V)	D.F. ≤	Exception of D.F. ≤		≥50	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35	10%	---	---	25	7.5%	10%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF	15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16 (C<1.0μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF			20%	0402≥0.22μF	16 (C<1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10	20%	30%	0402≥0.47μF	6.3	30%	---	---								
Rated Vol. (V)	D.F. ≤	Exception of D.F. ≤																																													
≥50	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																												
35	10%	---	---																																												
25	7.5%	10%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF																																												
		15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																												
16 (C<1.0μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF																																												
		20%	0402≥0.22μF																																												
16 (C<1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																												
10	20%	30%	0402≥0.47μF																																												
6.3	30%	---	---																																												
	* I.R.: ≥10V, 1GΩ or 50Ω-F whichever is smaller.																																														
	* Class II (X7R, X5R, Y5V)																																														
	<table><tr><th>Rated Voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="7">10GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210 ≥ 10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V: 4V</td></tr></table>	Rated Voltage	Insulation Resistance	100V: X7R	10GΩ or RxC ≥ 10 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210 ≥ 10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V: 4V																																				
Rated Voltage	Insulation Resistance																																														
100V: X7R	10GΩ or RxC ≥ 10 Ω-F whichever is smaller.																																														
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																															
35V: 0805≥2.2μF; 1210 ≥ 10μF																																															
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																															
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																															
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																															
6.3V: 4V																																															

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

Humidity (Damp Heat) Load

- * Test temp.: 40±2°C
- * Humidity: 90~95% RH
- * Test time: 500+24/-0hrs.
- * To apply voltage :rated voltage
- * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).

- * No remarkable damage.
- * Cap change:
NP0: within ±7.5% or 0.75pF whichever is larger
X7R, X7E, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%;
TT series & C ≥ 1μF, within ±25%
**10V:0603 ≥ 4.7μF; 0402 ≥ 1μF; 0201 ≥ 0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; 6.3V, within +30/-40%
- * Q/D.F. value:
NP0: More than 30pF, Q≥200, 10pF≤C≤30pF, Q≥100+10/3C
* X7R, X5R:

Rated Vol. (V)	D.F.≤	Exception of D.F. ≤	
≥50	3.0%	6.0%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF
		10%	1210≥4.7μF
		20%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF
35	5.0%	20%	0805≥2.2μF; 1210≥10μF
25	5.0%	10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF
		14%	0603≥0.33μF; 1206≥4.7μF
		15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF
16	5.0%	10%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF
		15%	0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF
10	7.5%	15%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF
		20%	0201≥0.1μF; 0402≥1μF
6.3	15.0%	30%	0201≥0.1μF; 0402≥1μF; 0603≥10μF; 0805≥4.7μF; 1206≥47μF; 1210≥100μF
4	20.0%	---	---

* Y5V:

Rated Vol. (V)	D.F.≤	Exception of D.F. ≤	
≥50	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF
35	10%	---	---
25	7.5%	10%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF
		15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF
16 (C<1.0μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF
16 (C<1.0μF)	12.5%	20%	0402≥0.22μF
		20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF
10	20%	30%	0402≥0.47μF
6.3	30%	---	---

- * I.R.: ≥10V, 500MΩ or 25Ω-F whichever is smaller.

* Class II (X7R, X5R, Y5V)

Rated Voltage	Insulation Resistance
100V: X7R	500MΩ or RxC ≅ 25 Ω-F whichever is smaller.
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	
35V: 0805≥2.2μF; 1210 ≥ 10μF	
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	
6.3V: 4V	

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

High Temperature Load (Endurance)

- * Test temp.: NP0, X7R/X7E: 125±3°C
X5R, Y5V: 85±3°C
- * Test time: 1000+24/-0 hrs.
- * To apply voltage:
1. 6.3V or C ≥ 10μF or TT series:
150% of rated voltage.
- 2. 10V ≤ Ur < 500V:
200% of rated voltage.
- 3. 500V: 150% of rated voltage.
- 4. Ur ≥ 630V:
120% of rated voltage.
- 5. 100% of rated voltage for below range:

Size	Dielectric	Rated Vol. (V)	Capacitance Range
0201	X5R	6.3, 10	C ≥ 0.1μF
0402	X5R	6.3, 10	C ≥ 1.0μF
0603	X5R	6.3, 10	C ≥ 4.7μF
0805	X5R	6.3	C ≥ 22μF
1206	X5R	6.3	C ≥ 47μF
	NP0	3000	C ≥ 1.5pF

- 6. 150% of rated voltage for below range:

Size	Dielectric	Rated Vol. (V)	Capacitance Range
0402	X5R	10, 16, 25	C ≥ 0.22μF
	Y5V	16	C ≥ 0.47μF
0603	X5R	10, 16	C ≥ 1.0μF
	Y5V	16	C ≥ 2.2μF
0805	X5R	10	C ≥ 4.7μF
	Y5V	16	C ≥ 4.7pF

- * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).

- * No remarkable damage.
- * Cap change:
NP0: ±3.0% or ±0.3pF whichever is larger
X7R, X7E, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%;
TT series & C ≥ 1μF, within ±25%
**10V: 0603 ≥ 4.7μF; 0402 ≥ 1μF; 0201 ≥ 0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; 6.3V, within +30/-40%
- * Q/D.F. value:
NP0: More than 30pF, Q ≥ 350, 10pF ≤ C ≤ 30pF, Q ≥ 275+2.5C
Less than 10pF, Q ≥ 200+10C
- * X7R, X5R:

Rated Vol. (V)	D.F. ≤	Exception of D.F. ≤	
≥50	3.0%	6.0%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF
		10%	1210 ≥ 4.7μF
		20%	0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 10μF
35	5.0%	20%	0805 ≥ 2.2μF; 1210 ≥ 10μF
25	5.0%	10%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF
		14%	0603 ≥ 0.33μF; 1206 ≥ 4.7μF
		15%	0402 ≥ 0.10μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 6.8μF; 1210 ≥ 22μF
16	5.0%	10%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF
		15%	0402 ≥ 0.47μF; 0603 ≥ 0.68μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF
10	7.5%	15%	0402 ≥ 0.33μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF
		20%	0201 ≥ 0.1μF; 0402 ≥ 1μF
6.3	15.0%	30%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF
4	20.0%	---	---

- * Y5V:

Rated Vol. (V)	D.F. ≤	Exception of D.F. ≤	
≥50	7.5%	10%	0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF
35	10%	---	---
25	7.5%	10%	0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF
		15%	0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF
16 (C < 1.0μF)	10%	12.5%	0402 ≥ 0.068μF; 0603 ≥ 0.68μF
		20%	0402 ≥ 0.22μF
16 (C < 1.0μF)	12.5%	20%	0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF
		30%	0402 ≥ 0.47μF
10	20%	30%	0402 ≥ 0.47μF
6.3	30%	---	---

- * I.R.: ≥10V, 1GΩ or 50Ω-F whichever is smaller.



- * Class II (X7R, X5R, Y5V)

Rated Voltage	Insulation Resistance
100V: X7R	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.
50V: 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF	
35V: 0805 ≥ 2.2μF; 1210 ≥ 10μF	
25V: 0402 ≥ 1μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF	
16V: 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 47μF	
10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 47μF	
6.3V: 4V	

Multilayer Ceramic Chip Capacitors
Voltage ≤ 50VDC

MA Series

MERITEK

Resistance to Flexure of Substrate	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm. 	* No remarkable damage. <table><tr><th>Dielectric</th><th>Cap Change</th></tr><tr><td>Class I (NPO)</td><td>within ±3.0% or ±0.3pF whichever is larger</td></tr><tr><td>Class II (X7R)</td><td>within ±12.5%</td></tr><tr><td>Class II (Y5V)</td><td>within ±30%</td></tr></table> (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)	Dielectric	Cap Change	Class I (NPO)	within ±3.0% or ±0.3pF whichever is larger	Class II (X7R)	within ±12.5%	Class II (Y5V)	within ±30%
Dielectric	Cap Change									
Class I (NPO)	within ±3.0% or ±0.3pF whichever is larger									
Class II (X7R)	within ±12.5%									
Class II (Y5V)	within ±30%									
Adhesive Strength of Termination	* Capacitors mounted on a substrate. A force of 5N(≤0603) or 10N(> 0603) applied perpendicular to the place of substrate and parallel the line joining the center of terminations for 10±1 second.  * Pressurizing force: 0201 :2N / 0402 & 0603 : 5N>0603 : 10N * Test time: 10±1 sec.	* No remarkable damage or removal of the terminations.								
Vibration Resistance	* Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs. each in three mutually perpendicular directions.)	* No remarkable damage. * Cap change and Q/D.F.: To meet initial spec.								

Multilayer Ceramic Chip Capacitors


Voltage ≤ 50VDC

MA Series

MERITEK


PACKAGE DIMENSION

Size	0201, 0402, 0603, 0805, 1206, 1210			1812, 1825, 2220, 2225
Reel Size	7"	10"	13"	7"
C	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2
W1	8.4+1.5/-0	8.4+1.5/-0	8.4+1.5/-0	12.4+2.0/-0
A	178.0±0.10	250.0±1.0	330.0±0.10	178.0±0.10
N	65.0±1.0	100.0±1.0	100.0±1.0	60.5±1.0

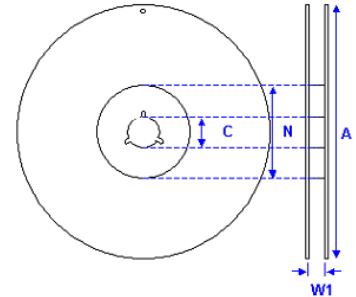


Size	0201	0402	0603	
Chip Size	0.30 ±0.03	0.50 ±0.05	0.80 ±0.07	0.80±0.15 /-0.10
A ₀	0.38±0.05	0.62±0.05	1.00+0.05 /-0.10	1.02+0.05 /-0.10
B ₀	0.68±0.05	1.12±0.05	1.80±0.10	1.80±0.10
T	0.42±0.05	0.60±0.05	0.95±0.05	0.97±0.05
K ₀	-	-	-	-
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.10	40.00±0.20	40.0±0.20	40.00±0.20
P ₁	2.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.1/-0
D ₁	-	-	-	-
E	1.75±0.05	1.75±0.05	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05

Paper Tape:

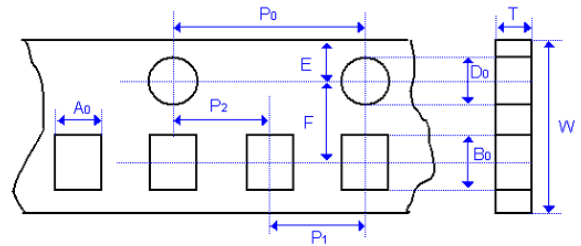

Plastic Tape:

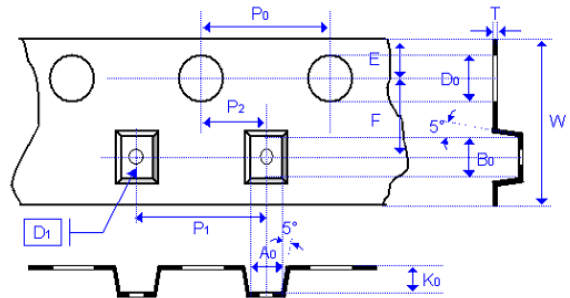

Size	0805		1206			1210		1808	
Chip Size	0.80 ±0.10	1.25 ±0.10	0.80 ±0.10	0.95±0.10 1.25±0.10	1.60±0.20 1.60+0.3/-0.1	0.95±0.10 1.25±0.10 1.60±0.20 2.00±0.20	2.50±0.30	1.25±0.10 1.40±0.15 1.60±0.20	2.00±0.20
A ₀	1.50±0.10	<1.65	2.00±0.10	<2.00	<2.00	<3.05	<3.10	<2.50	<2.50
B ₀	2.30±0.10	<2.40	3.50±0.10	<3.60	<3.70	<3.80	<4.00	<5.30	<5.30
T	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05
K ₀	-	<2.50	-	<2.50	<2.50	<2.50	<3.50	<2.50	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	12.0±0.20	12.0±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.100	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.0±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.0±0.20	40.0±0.20	40.0±0.20
P ₁	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.50±0.1/-0	1.50±0.05	1.50±0.1/-0	1.50±0.1/-0	1.50±0.1/-0	1.50±0.1/-0	1.50±0.1/-0	1.50±0.1/-0
D ₁	-	1.00±0.10	-	1.00±0.10	1.00±0.10	1.00±0.10	1.00±0.10	1.50±0.10	1.50±0.10
E	1.75±0.05	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05

Multilayer Ceramic Chip Capacitors

Voltage ≤ 50VDC

MA Series

MERITEK

PACKAGE DIMENSION (CONTINUED)

Size		2211		1812		1825		2220		2225	
Chip Size	1.60 ±0.20	2.00 ±0.20	2.50 ±0.20	2.00 ±0.20	2.50 ±0.30	2.00 ±0.20	2.50 ±0.30	1.40±0.15 1.60±0.20 2.00±0.20	2.50 ±0.30	2.00 ±0.20	2.50 ±0.30
A ₀	< 3.30	< 3.30	< 3.30	<3.90	<3.90	<6.80	<6.80	<5.80	<5.80	<6.80	<6.80
B ₀	< 6.50	< 6.50	< 6.50	<5.30	<5.30	<5.30	<5.30	<6.50	<6.50	<6.50	<6.50
T	0.30±0.10	0.30±0.10	0.30±0.10	0.25±0.05	0.25±0.05	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10
K ₀	< 2.50	< 3.10	<2.50	<3.0	<2.50	<3.10	<2.50	<3.10	<2.50	<3.10	<3.10
W	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.2	40.00±0.2	40.00±0.2	40.0±0.20	40.00±0.2	40.00±0.2	40.00±0.2	40.0±0.20	40.0±0.20	40.0±0.20	40.0±0.20
P ₁	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D ₁	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50+/-0.1	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.10	1.75+/-0.1	1.75±0.1	1.75±0.10	1.75±0.1	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50+/-0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05

REEL DIMENSION AND QUANTITY

Unit: pieces

Size	Thickness (mm)	Paper Tape		Plastic Tape	
		7" reel	13" reel	7" reel	13" reel
0201(0603)	0.30±0.05	15K	70K	-	-
0402 (1005)	0.50±0.05	10K	50K	-	-
0603 (1608)	0.80±0.07	4K	15K	-	-
	0.80±0.15	4k	15K	-	-
0805 (2012)	0.60±0.10	4K	15K	-	-
	0.80±0.10	4K	15K	-	-
	0.95±0.10	-	-	3K	10K
	1.25±0.10	-	-	3K	-
1206 (3216)	0.80±0.10	4K	15K	-	-
	0.95±0.10	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	2K	-
1210 (3225)	0.95±0.10	-	-	3K	10K
	1.25±0.10	-	-	3K	10K
	1.60±0.20	-	-	2K	-
	2.00±0.20	-	-	1K	-
	2.50±0.30	-	-	1K	-
1808 (4520)	1.25±0.10	-	-	2K	-
	1.60±0.20	-	-	2K	-
	2.00±0.20	-	-	1K	-
1812 (4532)	1.25±0.10	-	-	1k	-
	1.60±0.20	-	-	1K	-
	2.00±0.20	-	-	1K	-
	2.50±0.30	-	-	0.5K	-
1825 (4563)	1.60±0.20	-	-	1K	-
	2.00±0.20	-	-	1K	-
	2.50±0.30	-	-	0.5K	-
2220 (5750)	1.60±0.20	-	-	1K	-
	2.00±0.20	-	-	1K	-
	2.50±0.30	-	-	0.5K	-
2225 (5763)	2.00±0.20	-	-	1K	-
	2.50±0.30	-	-	0.5K	-

Multilayer Ceramic Chip Capacitors

Voltage $\leq$ 50VDC

MA Series

MERITEK

APPLICATION NOTES

STORAGE

- * To prevent the damage of solderability of terminations, the following storage conditions are recommended:
 1. Indoors under 5°C~ 40°C and 20% ~ 70% RH.
 2. No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.
- * Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 6 months and checked the solderability before use.

HANDLING

- * Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.

PREHEAT

- * In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 4°C per second. and the final preheat temperature should be within 100°C of the soldering temperature for small chips such as 0805, 1206, within 50°C of the soldering temperature for bigger chips such as 1210, 1808, 1812, 1825, 2211, 2220 and 2225, etc.

SOLDERING

- * Use midly activated rosin RA and RMA fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.
- * Hand soldering with temperature-controlled iron not exceeding 30 watts and diameter of tip less than 1.2 mm is recommended, tip of iron should not contact the ceramic body directly, and the temperature of iron should be set to not more than 260°C.
- * For bigger chips such as 1210, 1808, 1812, 2211, 2220 and 2225, etc. wave soldering and hand soldering are not recommended.
- * Refer IPC/JEDEC J-STD-020D Method recommended soldering profiles:
Reflow not sooner than 15 minutes and not longer than 4 hrs after removal from the temperature/humidity chamber, subject the sample to 3 cycle of the appropriate reflow conditions as the table description below.

Profile Feature		Pb-Free Assembly
Preheat/Soak	Temperature MIN (T_{smin})	150°C
	Temperature MAX. (T_{smax})	200°C
	Time(t_s) from (T_{smin} to T_{smax})	60~120 seconds
Ramp-up rate (T_L to T_P)		3°C/second max.
Liquidous Temperature (T_L) Time(T_L) maintained above T_L		217°C 60~150 seconds
Peak package body temperature(T_P)		For user T_P must not exceed the classification temp 260°C For supplier T_P must equal or exceed the classification temp 260°C
Time(T_P)* within 5°C of the specified classification temperature(T_C)		30 seconds
Ramp-down rate (T_P to T_L)		6°C/second MAX.
Time 25°C to peak temperature 260°C		8 minutes MAX.

* Lead-free: Soldering temperature = 235 to 260°C, depending on product.

* Maximum temperature = Minimum temperature (235°C) + ΔT + Tolerance for oven process and measurement (5 ~ 7°C)

* Time at peak temperature = 10sec, Dwell above 217°C = 90sec, Ramping rate = 3°C/sec (heating) and 6°C/sec (heating).


Multilayer Ceramic Chip Capacitors
Voltage $\leq 50\text{VDC}$

MA Series

MERITEK

APPLICATION NOTES (CONTINUED)

CLASSIFICATION REFLOW PROFILES

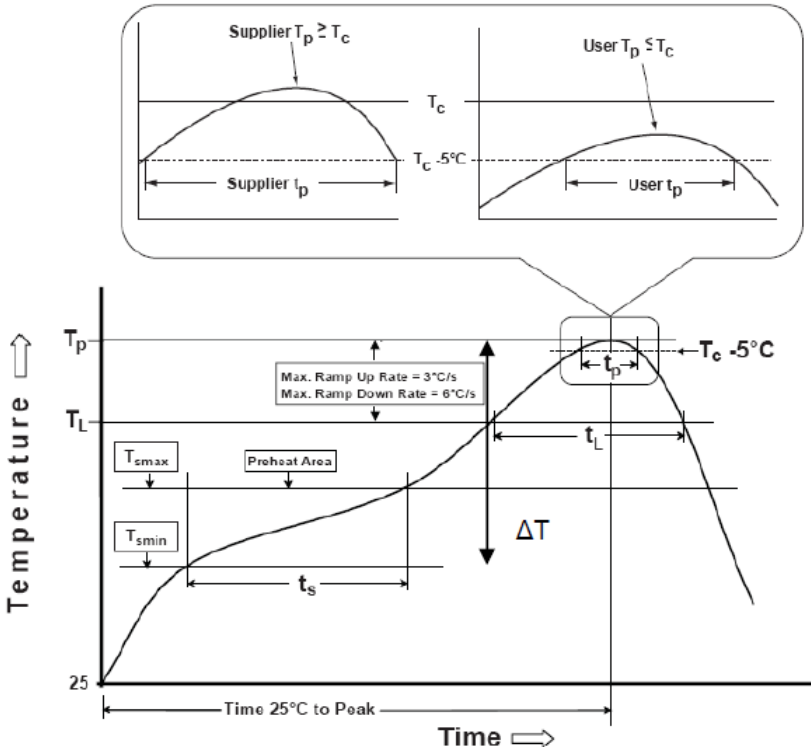

Chip Size	ΔT
0805, 1206	100°C
1210, 1808, 1812, 1825, 2211, 2220, 2225	50°C

Soldering	Solder Temp. (T_c)	Soldering Time (t_p)
Reflow	235~260°C	< 15sec.

Note:
For example: T_c is 260°C and time t_p is 15sec.
For user: The peak temperature must not exceed 260°C. The time above 255°C must not exceed 15 seconds.

COOLING

* After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint. A cooling rate not exceeding 4 per second should °C be used when forced cooling is necessary.

CLEANING

* All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.