

Optoisolator



2CH AC/DC BJT SOP-8

OPI215ADB80S8

MERITEK

FEATURE

- Current Transfer Ratio: 80%~600%
- Isolation Voltage: 1500 Vrms
- High CTR with Low Input Current
- Low Coupling Capacitance
- Application: AC Power Monitoring, Programmable Controller, Industrial I/O Module, Communication Equipment Protection
- In Accordance with Safety Class UL1577 Standard

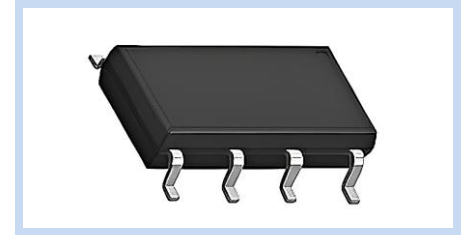

MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Input Forward Current		I_F	50	mA
Input Peak Forward Current		I_{FP}	1	A
Input Reverse Voltage		V_R	5	V
Output Collector Current		I_C	50	mA
Output Power Dissipation		P_C	150	mW
Output Collector-Emitter Voltage	$I_C=1mA, I_B=0A$	V_{CEO}	80	V
Output Emitter-Collector Voltage	$I_E=100\mu A, I_B=0A$	V_{ECO}	6	V
Isolation Voltage	AC for 60sec, 60% R.H.	V_{ISO}	1500	V_{RMS}
Power Dissipation		P_T	200	mW
Operating Temperature Range		T_{Opr}	-55~+100	°C
Storage Temperature Range		T_{Stg}	-55~+125	°C
Soldering Temperature	For 10 sec	T_{SOL}	260	°C


ELECTRICAL CHARACTERISTICS

Input Characteristics		Conditions	Symbol	Min	Typ.	Max	Unit
Forward Voltage		I _F =±20mA	V _F	--	1.2	1.4	V
Reverse Current		V _R =5V	I _R	--	--	10	μA
Input Capacitance		V=0, f=1KHz	C _{in}	--	25	--	pF
Output Characteristics		Conditions	Symbol	Min	Typ.	Max	Unit
Collector-Emitter Dark Current		V _{CE} =10V, I _F =0A	I _{CEO}	--	--	100	nA
Collector-Emitter Breakdown Voltage		I _C =0.5mA	BV _{CEO}	80	--	--	V
Emitter-Collector Breakdown Voltage		I _E =0.1mA	BV _{ECO}	5	--	--	V
Coupled Characteristics		Conditions	Symbol	Min	Typ.	Max	Unit
Current Transfer Ratio	OPI215ADB80S8	I _F =±1mA, V _{CE} =5V	CTR	80	--	600	%
	OPI215ADB80S8A			80	--	160	
	OPI215ADB80S8B			130	--	260	
	OPI215ADB80S8C			200	--	400	
	OPI215ADB80S8D			300	--	600	
Collector-Emitter Saturation Voltage		I _F =±20mA, I _C =1mA	V _{CE(SAT)}	--	--	0.4	V
Isolation Resistance		V _{IO} =500V _{DC}	R _{ISO}	--	10 ⁹	--	Ω
Isolation Capacitance		V=0, f=1MHz	C _{ISO}	--	1.0	--	pF
Rise Time		V _{CE} =5V, I _C =2mA, R _L =100Ω	t _r	--	6	--	μs
Fall Time			t _f	--	6	--	


Note: $T_A=25^\circ C$ unless otherwise noted.

CHARACTERISTIC CURVES


Forward Current vs. Temperature

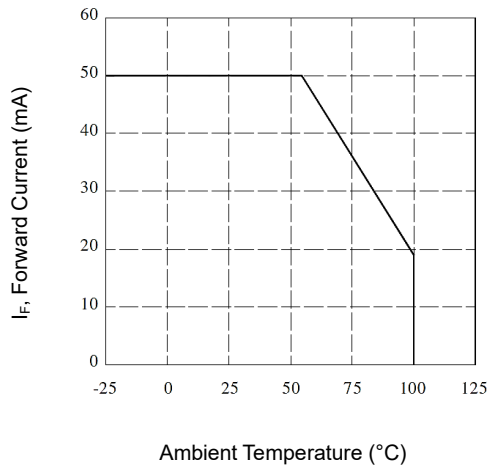


Collector Power Dissipation vs. Temperature

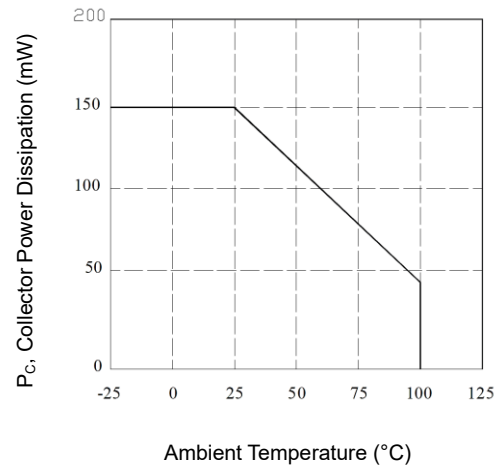


Forward Current vs. Forward Voltage

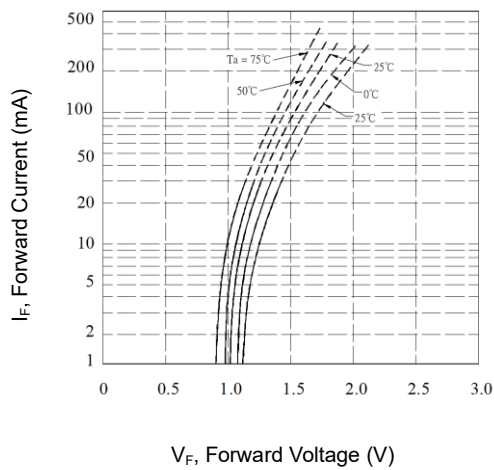


Collector Dark Current vs. Temperature

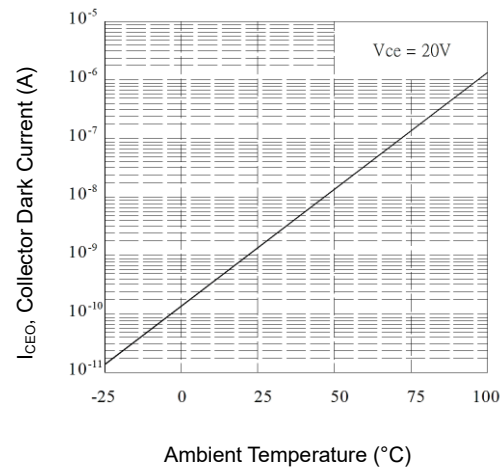

Current Transfer Ratio vs. Forward Current

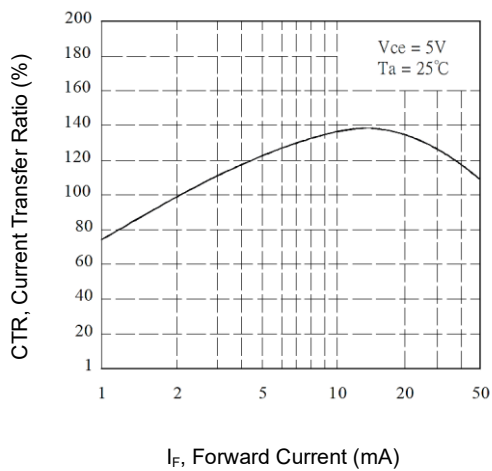


Relative Current Transfer Ratio vs. Temperature

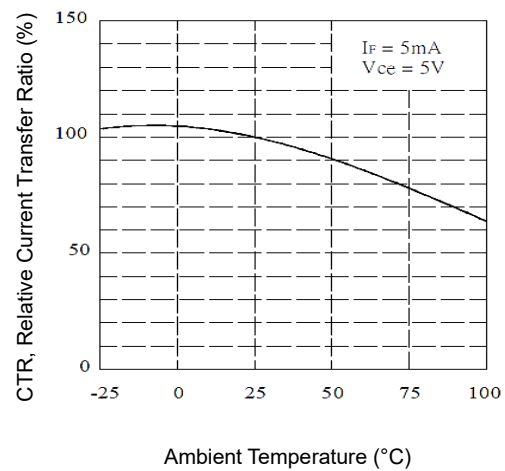


CHARACTERISTIC CURVES


Collector-Emitter Saturation Voltage vs. Forward Current

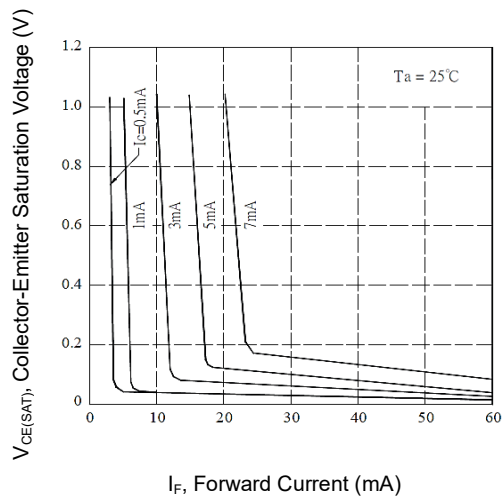


Response Time vs. Load Resistance

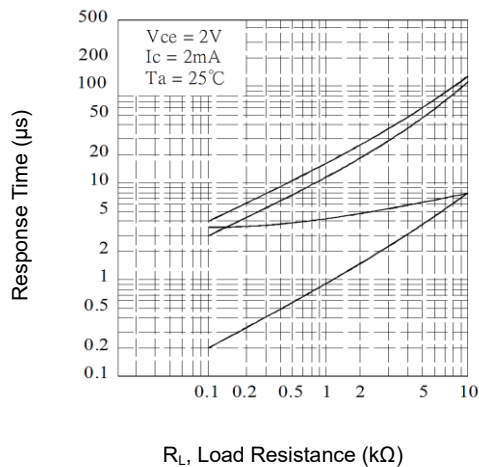


Collector Current vs. Collector Emitter Voltage

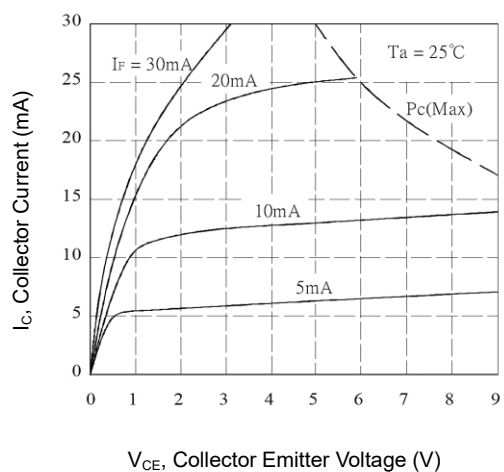

Collector-Emitter Saturation Voltage vs. Temperature

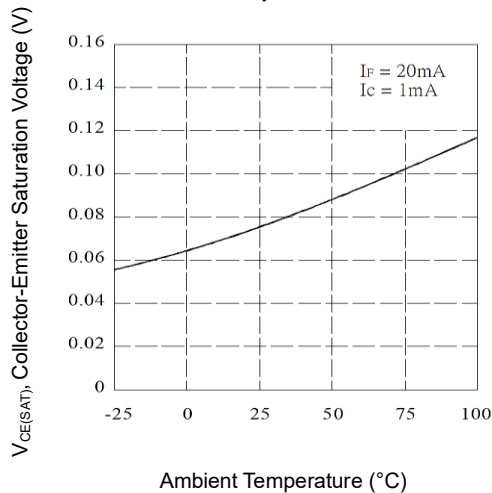

Peak Forward Current vs Duty Ratio

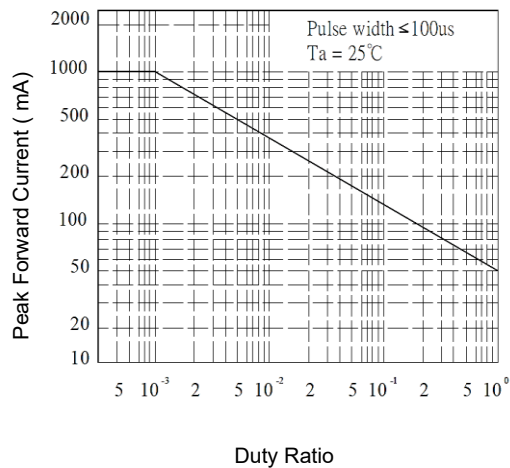

Optoisolator

2CH AC/DC BJT SOP-8

OPI215ADB80S8

MERITEK

DIMENSIONS

Item	Min (mm)	Max (mm)
A1	--	0.10
A2	1.80	2.20
b	0.30	0.50
D	9.20	9.60
E	6.40	7.20
E1	4.20	4.60
e	2.54	
e1	5.08	
L	0.46	0.86
X	0.80	
X1	7.62	
Y	1.20	
Y1	7.20	

Note:

1,3.LED Anode, Cathode; 2,4.LED Cathode, Anode; 5,7.Emitter; 6,8. Collector

