

SSR Relay NO-1A



AC/DC 60V 0.55A DIP-4

SSR1A1IA55D4

MERITEK

FEATURE

- Normally Open (1-Form-A) Solid State Relay
- AC/DC Output Load Compatible
- Isolation Voltage: 3750/5000 Vrms
- Application: Telecommunications, Measuring and Testing Equipment, Industrial Control, Security Systems
- In Accordance with Safety Class UL 1577 Standard

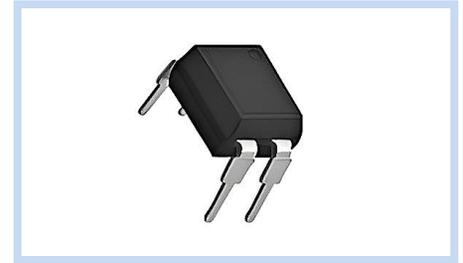

MAXIMUM RATINGS

| Parameter | | Symbol | Value | Unit |
|------------------------------|----------------------------|------------|----------|-----------|
| Input Continuous LED Current | | I_F | 50 | mA |
| Input Peak LED Current | $f=100\text{Hz, duty}=1\%$ | I_{FP} | 1 | A |
| Input LED Reverse Voltage | | V_R | 5 | V |
| Input Power Dissipation | | P_{In} | 75 | mW |
| Output Load Voltage | AC peak or DC | V_L | 60 | V |
| Output Load Current | | I_L | 550 | mA |
| Output Peak Load Current | 100ms (1 pulse) | I_{Peak} | 1.0 | A |
| Output Power Dissipation | | P_{out} | 450 | mW |
| Total Power Dissipation | | P_T | 500 | mW |
| Isolation Voltage | AC for 60sec, RH60% | V_{ISO} | 3750 | V_{RMS} |
| Isolation Voltage (Suffix V) | | | 5000 | V_{RMS} |
| Operating Temperature Range | | T_{Opr} | -40~+85 | °C |
| Storage Temperature Range | | T_{Stg} | -40~+100 | °C |
| Soldering Temperature | For 10 sec | T_{SOL} | 260 | °C |

ELECTRICAL CHARACTERISTICS

| Input Characteristics | Conditions | Symbol | Min | Typ. | Max | Unit |
|------------------------------|---|--------------|-----------|------|------|----------|
| LED Forward Voltage | $I_F=10\text{mA}$ | V_F | -- | 1.2 | 1.5 | V |
| Operation LED Current | -- | $I_{F(On)}$ | -- | 0.5 | 5.0 | mA |
| Recovery LED Current | -- | $I_{F(Off)}$ | -- | 0.35 | 0.5 | mA |
| Recovery LED Voltage | -- | $V_{F(Off)}$ | 0.7 | -- | -- | V |
| Output Characteristics | Conditions | Symbol | Min | Typ. | Max | Unit |
| On-Resistance | $I_F=10\text{mA, } I_L=100\text{mA,}$ Time to flow is within 1 sec | $R_{(On)}$ | -- | 0.8 | 1.5 | Ω |
| Off-State Leakage Current | $V_L=\text{Rating}$ | I_{Leak} | -- | 1 | 10 | nA |
| Output Capacitance | $V_L=0\text{V, } f=1\text{MHz}$ | C_{Out} | -- | 28 | -- | pF |
| Transmission Characteristics | Conditions | Symbol | Min | Typ. | Max | Unit |
| Turn-On Time | $I_F=10\text{mA, } I_L=100\text{mA}$ | t_{on} | -- | 0.25 | 0.35 | ms |
| Turn-Off Time | | t_{off} | -- | 0.02 | 0.05 | ms |
| Coupled Characteristics | Conditions | Symbol | Min | Typ. | Max | Unit |
| I/O Isolation Resistance | $V_{IO}=500\text{V}_{DC}$ | R_{IO} | 10^{10} | -- | -- | Ω |
| I/O Capacitance | $f=1\text{MHz}$ | C_{IO} | -- | 0.8 | 1.5 | pF |

Note: $T_A=25^\circ\text{C}$ unless otherwise noted.

SSR Relay NO-1A


AC/DC 60V 0.55A DIP-4

SSR1A1IA55D4


MERITEK

CHARACTERISTIC CURVES


Load Current vs. Temperature

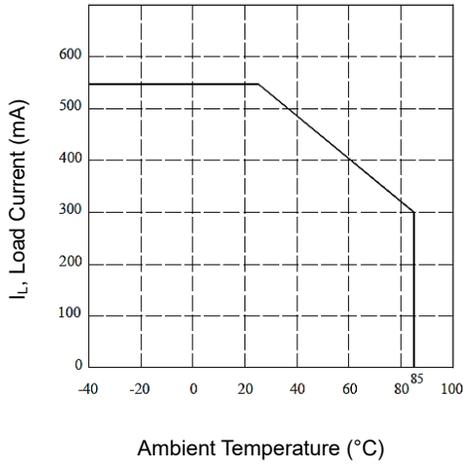


On Resistance vs. Temperature

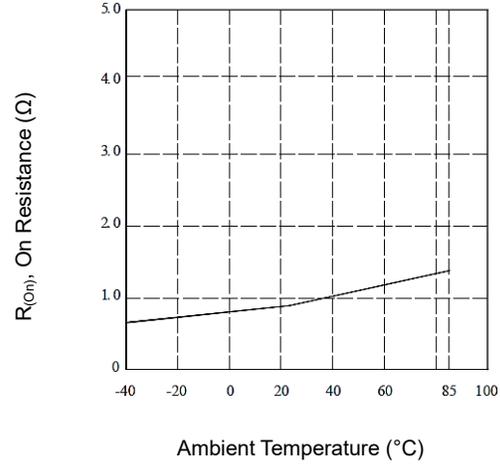


Turn-On Time vs. Temperature

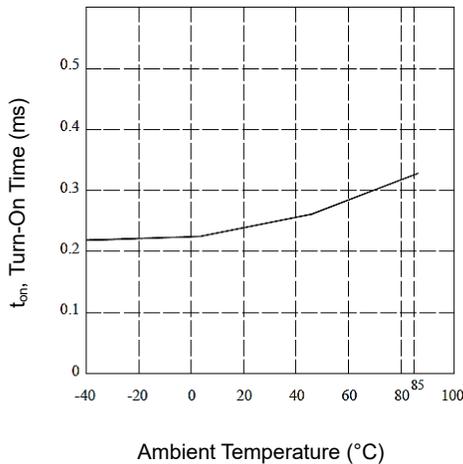


Turn-Off Time vs. Temperature

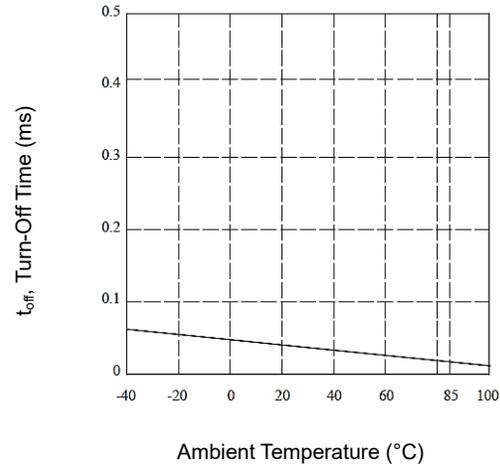

LED Operate Current vs. Temperature

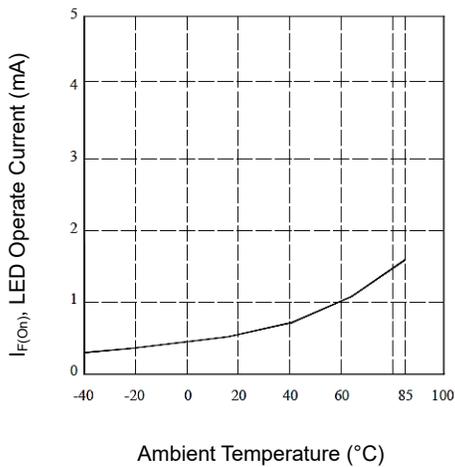


LED Turn-Off Current vs. Temperature

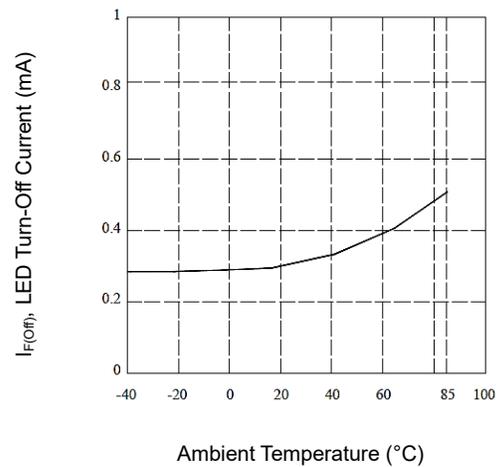


CHARACTERISTIC CURVES


LED Forward Voltage vs. Temperature

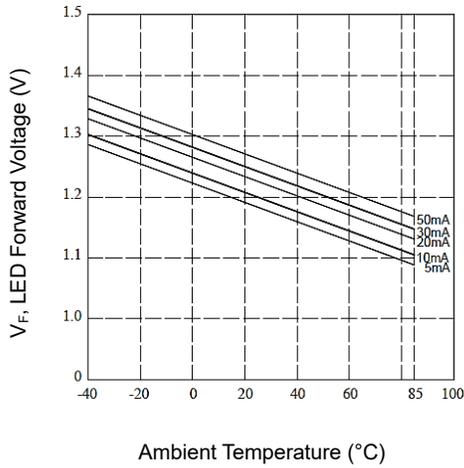


Off-State Leakage Current vs. Load Voltage

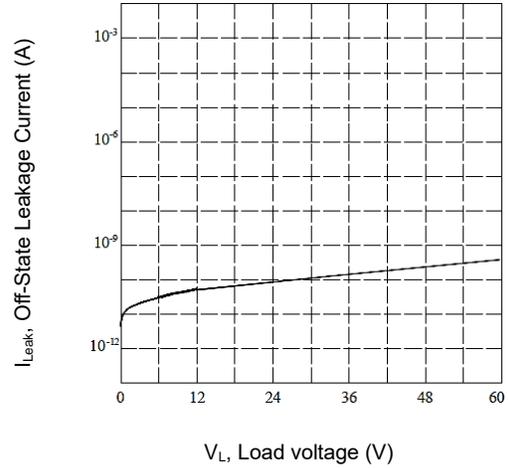


LED Forward Current vs. Turn-On Time

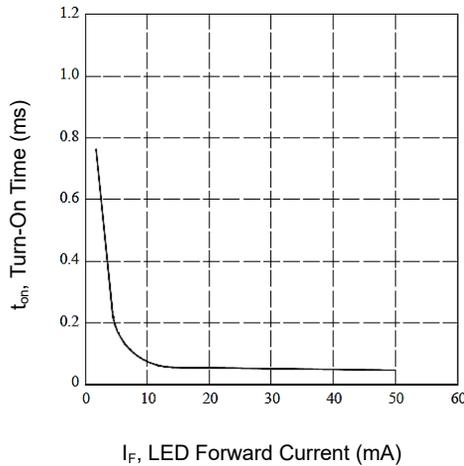


LED Forward Current vs. Turn-Off Time

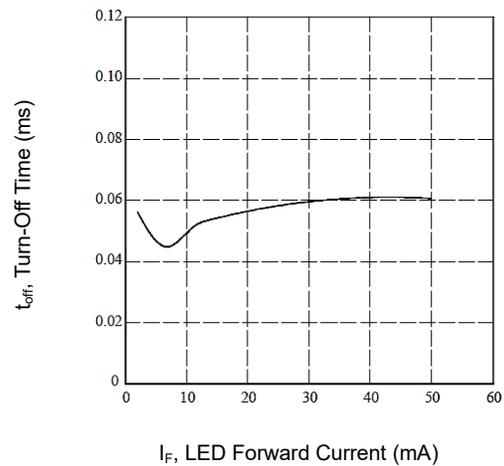

Applied Voltage vs. Output Capacitance

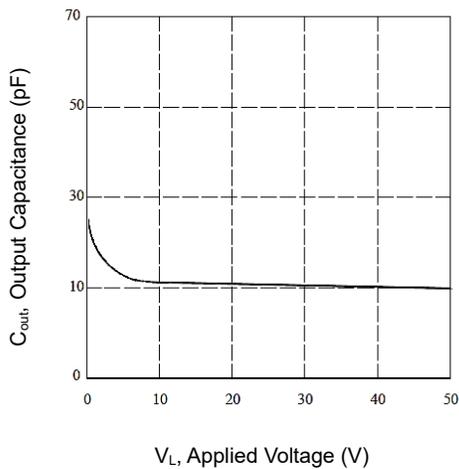

V-I Characteristics of Output MOS

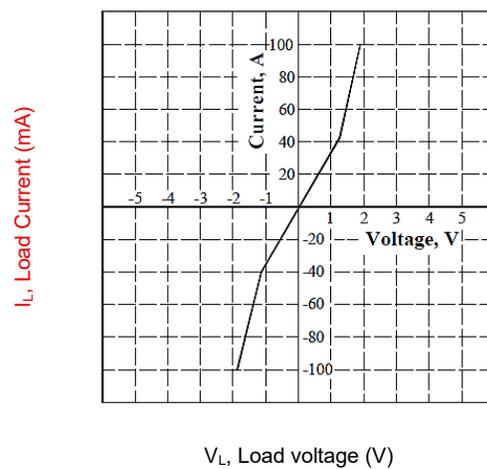

SSR Relay NO-1A

AC/DC 60V 0.55A DIP-4

SSR1A1IA55D4

MERITEK

DIMENSIONS

| Item | Min (mm) | Max (mm) |
|------|----------|----------|
| A | 6.70 | 7.10 |
| A1 | 3.20 | 3.60 |
| A2 | 3.70 | 4.10 |
| b | 0.27 | 0.67 |
| c | 0.25 | |
| D | 4.50 | 4.90 |
| E | 6.20 | 6.60 |
| E1 | 7.42 | 7.82 |
| e | 2.54 | |
| X | 2.54 | |
| Y | 7.62 | |

Note:

1.LED Anode; 2.LED Cathode; 3,4.Drain (MOSFET)

