

# High Voltage Rectifier Diode


## 18KV DO-415

2CLG5018

MERITEK

### FEATURE

- High Reverse Voltage Capability
- High Surge Current Resistance
- Fast Recovery Time for High-Frequency Operations
- Engineered for high-voltage rectification and protection

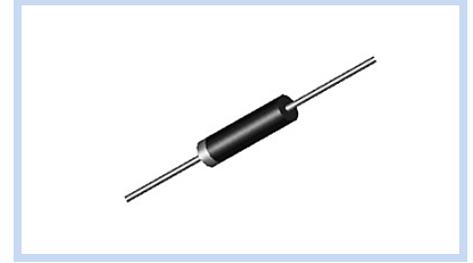

### APPLICATIONS

- Medical Diagnostic Systems: X-Ray, CT and MRI Scanners
- Industrial High-Voltage and High-Power Machinery
- DC HV Power Supply, SCR-Controller Rectifier
- HF AC-to-DC Rectifier, RF and High-Speed Switching

### ELECTRICAL CHARACTERISTICS

Parameter	Symbol	2CLG5018	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	18	KV
Maximum Average Forward Rectified Current	$I_{F(AV)}$	500	mA
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rate load	$I_{FSM}$	30	A
Maximum Forward Voltage at $I_{FM} = 100mA$	$V_{FM}$	40	V
Maximum Reverse Current at Rated DC Blocking Voltage	$I_R$	$T_A = 25^\circ C$	5
		$T_A = 100^\circ C$	50
Maximum Reverse Recovery Time	$t_{rr}$	0.15	$\mu s$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-40 ~ +120	$^\circ C$

Notes:


1. Ratings at 25°C ambient temperatures unless otherwise specified.
2. Reverse Recovery Time Test Condition:  $I_F = 2mA$ ,  $I_{RM} = 4mA$ ,  $I_{RR} = 1mA$ .

### DIMENSIONS

Item	Min.(mm)	Max. (mm)
D	4.0	4.4
d	0.77	0.83
L	26.0	-
T	14.8	15.2


Note:

1. Case: DO-415, Molded Plastic
2. Epoxy: UL Flammability Classification Rating 94V-0
3. Polarity: Color Band Denotes Cathode End

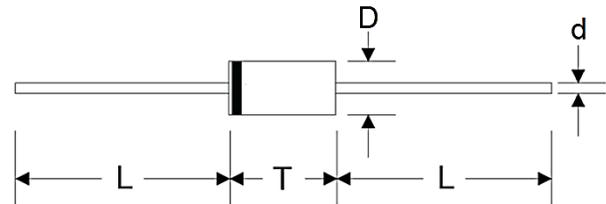


## CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

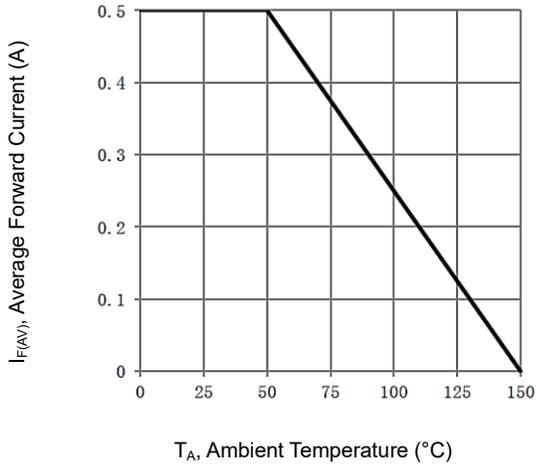

Maximum Non-repetitive Forward Surge Current

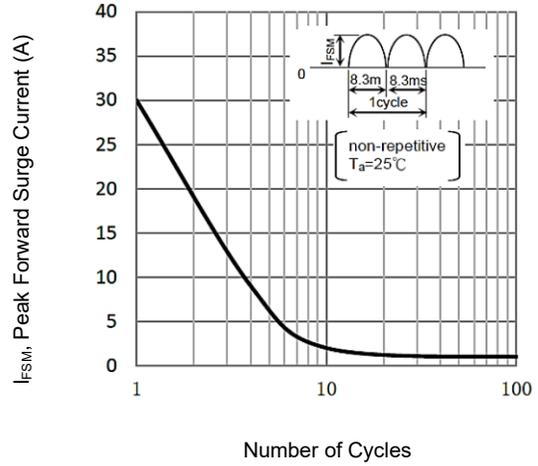

Typical Forward Characteristics

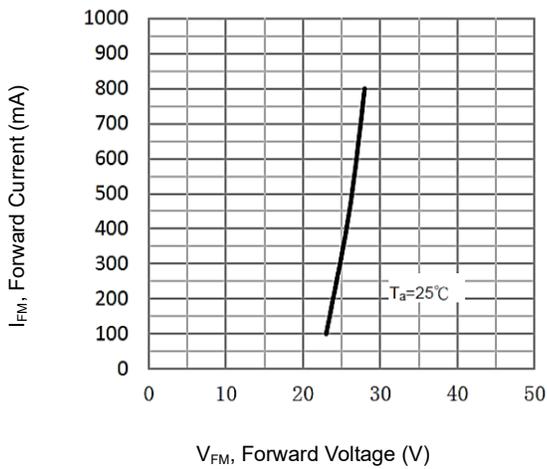

Typical Reverse Characteristics

