

Fast Recovery Rectifier


15A 200~600V TO-220AC

MUR15xx Series

MERITEK

FEATURE

- High Forward Surge Current Capability
- Glass Passivated Chip Junction
- Superfast Recovery Time
- Application: DC to DC Converters, Switching Mode Power Supplies, Inverters, Freewheeling Diodes

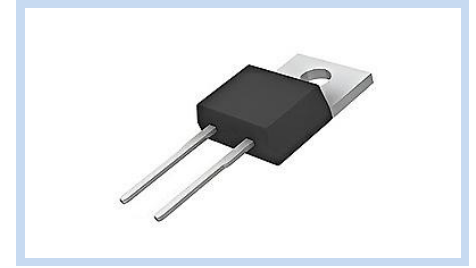

MECHANICAL DATA

- Case: TO-220AC Package
- Terminals: Solderable per MIL-STD-202, Method 208

MAXIMUM RATINGS AND THERMAL CHARACTERISTICS

Parameter	Symbol	MUR1520	MUR1540	MUR1560	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	V
Maximum RMS Voltage	V_{RMS}	140	280	420	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	15			A
Peak Forward Surge Current, 8.3ms Single Half-Sine-Wave (JEDEC Method)	I_{FSM}	200			A
Maximum Forward Voltage at $I_F = 15A$	V_F	0.98	1.30	1.70	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_J = 25^\circ C$	5.0			μA
	$T_J = 125^\circ C$	500			
Maximum Reverse Recovery Time	t_{rr}	50			ns
Thermal Resistance Junction to Case	$R_{\theta JC}$	1.5			$^\circ C/W$
Operating Junction Temperature Range	T_J	-55 ~ +150			$^\circ C$
Storage Temperature Range	T_{STG}	-65 ~ +175			$^\circ C$


Notes:

1. Ratings at 25°C ambient temperatures unless otherwise specified.
2. Reverse recovery time test condition: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.

DIMENSIONS

Item	Min (mm)	Max (mm)
A	4.16	5.00
A1	1.15	1.39
b	0.50	0.96
c	-	0.65
D	13.93	15.87
E	9.85	10.66
e	2.54	
e1	5.08	
H1	5.75	6.85
L	12.70	-
L1	-	4.50
P	3.55	-

Pin Layout: 1:Cathode, 2:Anode

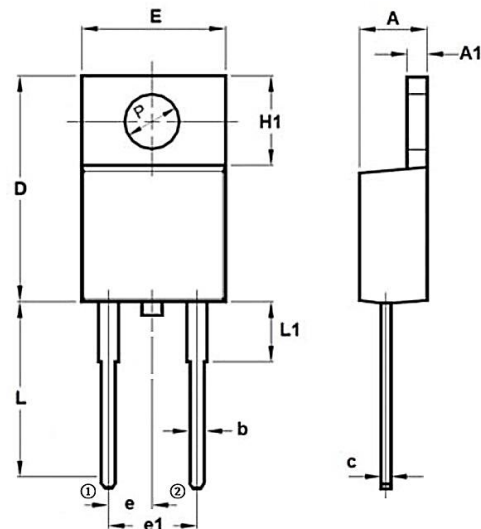

Fast Recovery Rectifier


15A 200~600V TO-220AC

MUR15xx Series


MERITEK

CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

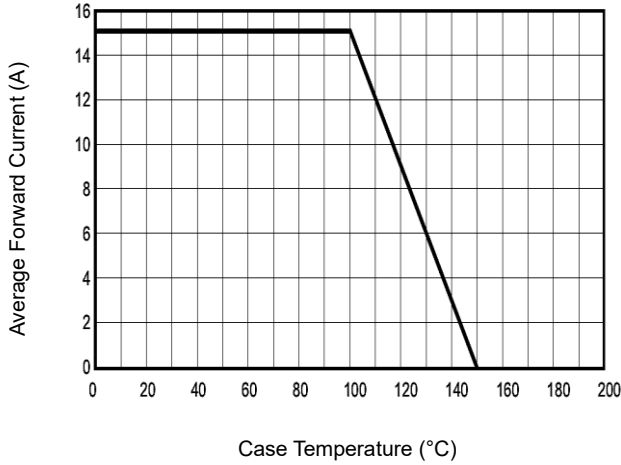

Maximum Non-Repetitive Forward Surge Current

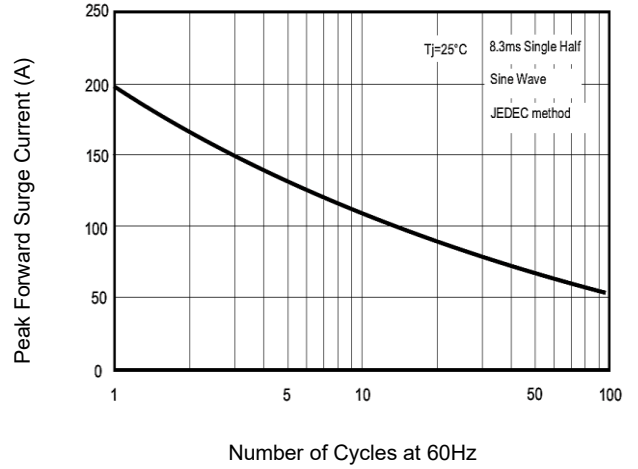

Typical Instantaneous Forward Characteristics

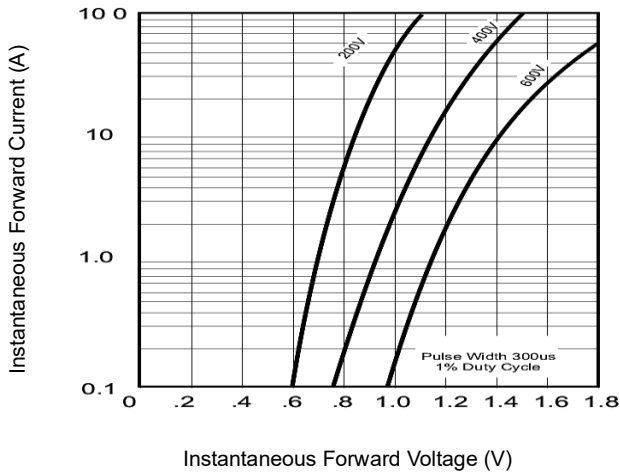

Typical Reverse Characteristics

