

ESD Suppressor 3.3V 2-Unidirectional DFN1006-3

ME3V32U9D023

MERITEK


FEATURE

- IEC 61000-4-2 ESD: $\pm 18\text{KV}$ (Air) $\pm 15\text{KV}$ (Contact)
- IEC 61000-4-4 EFT: 40A (5/50ns)
- IEC 61000-4-5 Lightning: 3A (8/20 μs)
- Low Capacitance
- Low Clamping Voltage
- Solid-State Silicon-Avalanche Technology



APPLICATION

- USB 3.0 Data Lines Protection
- Data and I/O Lines Protection
- Video Lines Protection
- Hand Held Portable Devices
- Destops and Notebooks



MAXIMUM RATINGS AND CHARACTERISTICS

Parameter	Symbol	Value	Unit
ESD Voltage per IEC61000-4-2 (Contact discharge)	V_{ESD}	± 15	KV
ESD Voltage per IEC61000-4-2 (Air discharge)		± 18	KV
Operating & Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	--	V_{RWM}	--	--	3.3	V
Reverse Breakdown Voltage	$I_{\text{BR}}=1\text{mA}$	V_{BR}	4	--	--	V
Reverse Leakage Current	$V_{\text{R}}=3.3\text{V}$	I_{R}	--	--	50	nA
Clamping Voltage	$I_{\text{PP}}=1\text{A}, t_{\text{p}}=8/20\mu\text{s}$	V_{C}	--	--	9	V
	$I_{\text{PP}}=3\text{A}, t_{\text{p}}=8/20\mu\text{s}$		--	--	13	
Clamping Voltage TLP	$I_{\text{PP}}=8\text{A}, t_{\text{p}}=100\text{ns}$	V_{C}	--	15	--	V
	$I_{\text{PP}}=16\text{A}, t_{\text{p}}=100\text{ns}$		--	22	--	
Dynamic Resistance	$t_{\text{p}}=100\text{ns}$	R_{DYN}	--	0.88	--	Ω
Off State Junction Capacitance	$V_{\text{dc}}=0, f=1\text{MHz}$, Any I/O pins to GND	C_{J}	--	--	0.4	pF
	$V_{\text{dc}}=0, f=1\text{MHz}$ Between any I/O pins		--	--	0.2	


Notes:

1. $T_J=25^{\circ}\text{C}$ unless otherwise specified


2. Transmission Line Pulse (TLP) test condition: $Z_0=50\Omega, t_{\text{p}}=100\text{ns}$

CHARACTERISTIC CURVES


Typical Junction Capacitance

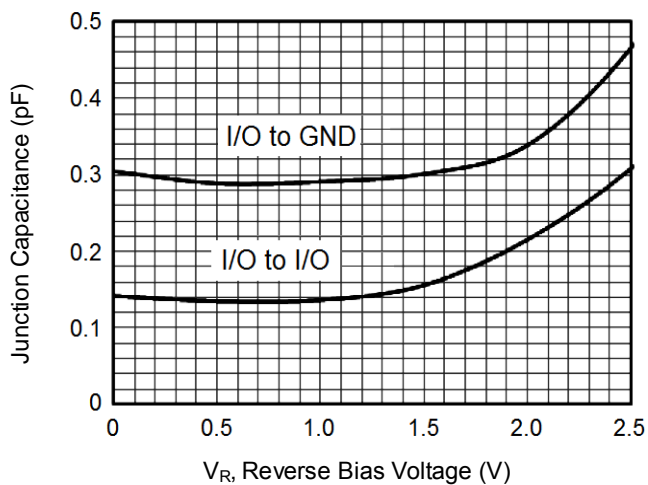


TLP Measurement

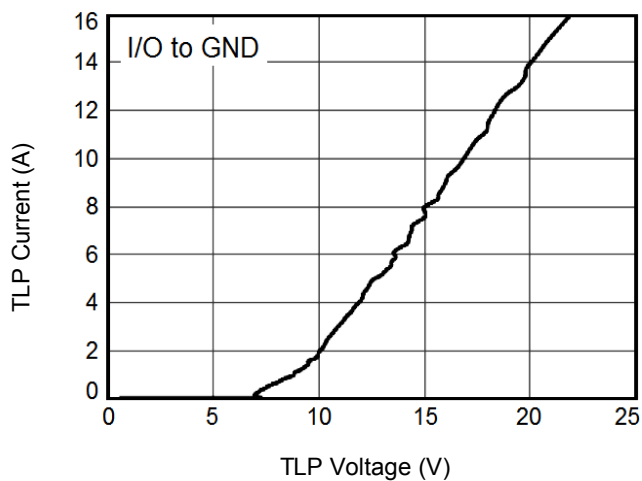

Typical Peak Clamping Voltage (8/20 μ s)

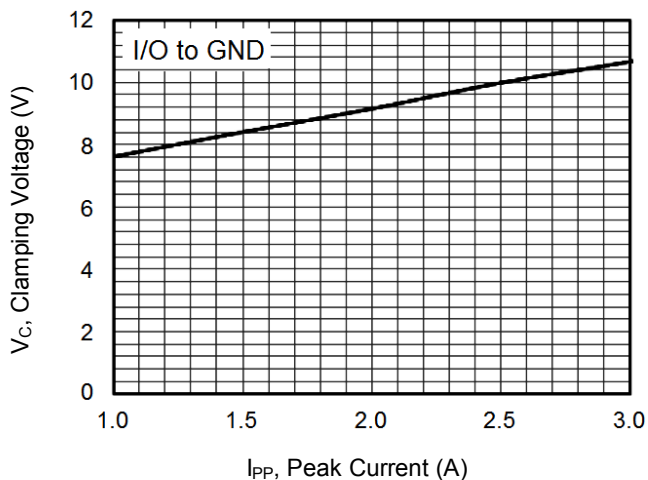

Pulse Waveform

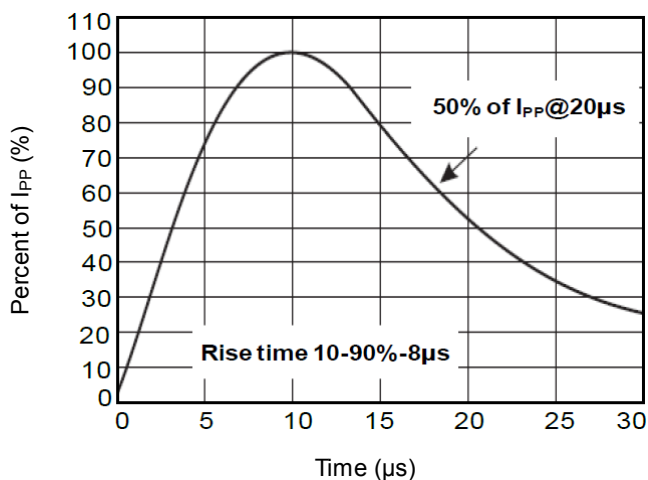


ESD Suppressor
3.3V 2-Unidirectional DFN1006-3

ME3V32U9D023

MERITEK

DIMENSIONS AND RECOMMENDED LAND PATTERN

Item	Min (mm)	Max (mm)
A	0.45	0.55
A1	-	0.05
b2	0.45	0.55
D	0.95	1.05
E	0.55	0.65
z	0.10	0.10
L1	0.20	0.30
L2	0.20	0.30
L3	0.40	0.40
C	0.70	0.70
G1	0.30	0.30
X	0.40	0.40
X1	1.10	1.10
Y1	0.60	0.60

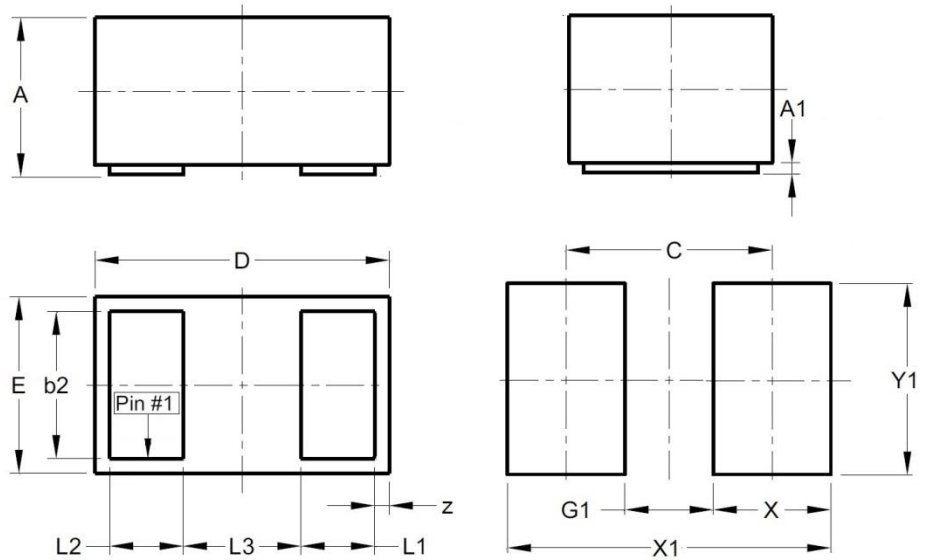

*Specifications subject to change without notice.