

Chip Ferrite Bead High Current type

SIM05-36 Series

MERITEK

FEATURE

- Operating temperature: -55°C ~ +125°C (Including self-temperature rise)
- Monolithic Inorganic Material Construction
- Low DC Resistance
- Noise reduction solution for Signal Line
- Excellent Solderability and Heat Resistance




PART NUMBERING SYSTEM

SIM 05 170 Y 3A0 36
 (1) (2) (3) (4) (5) (6)



No	item	Code	Description	
(1)	Product Code	SIM	Signal Chip Inductor, Multi-Layer Chip Ferrite Bead Type	
(2)	Dimension	05	05: 0805, 2.0x1.25mm	See Dimensions Table
(3)	Impedance	170	170: 17Ω	First two digit: Significant, Third: Multiplier
(4)	Tolerance	Y	Y: ±25%	-25% ~ +25%
(5)	Rated Current	3A0	3A0: 3.0A	A: Decimal
(6)	Series Code	36	Chip Ferrite Bead, High Current Type	Internal Control Code

DIMENSIONS

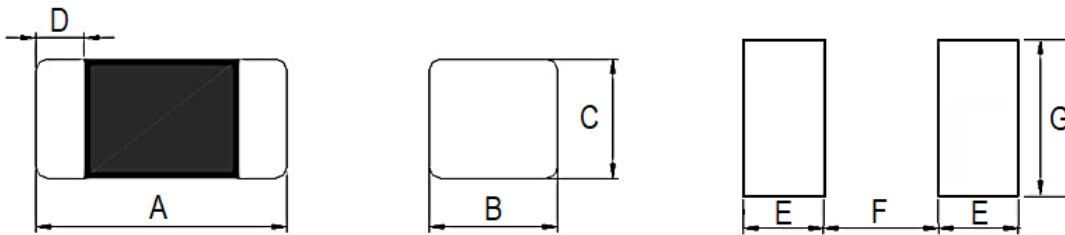

Size Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
SIM02 (0402)	1.00±0.10	0.50±0.10	0.50±0.10	0.1~0.3	0.50	0.40	0.60
SIM03 (0603)	1.60±0.15	0.80±0.15	0.80±0.15	0.2~0.6	0.80	0.85	0.95
SIM05 (0805)	2.00±0.20	1.25±0.20	0.85±0.20	0.2~0.8	1.05	1.00	1.45
SIM06 (1206)	3.20±0.20	1.60±0.20	1.10±0.20	0.4~1.0	1.05	2.20	1.80
SIM10 (1210)	3.20±0.20	2.50±0.20	1.30±0.20	0.6~1.0	1.05	2.20	2.70
SIM86 (1806)	4.50±0.20	1.60±0.20	1.60±0.20	0.6~1.0	1.05	3.30	1.80
SIM82 (1812)	4.50±0.20	3.20±0.20	1.50±0.20	0.6~1.0	1.05	3.30	3.40

Chip Ferrite Bead High Current type





SIM05-36 Series

MERITEK

ELECTRICAL CHARACTERISTICS

Size	Series	Impedance (Ω)	Tolerance (%)	Test Frequency (MHz)	DCR (Ω) Max	Rated Current (mA) Max
0805	SIM05170Y3A036	17	$\pm 25\%$	100	0.030	3000
	SIM05310Y3A036	31	$\pm 25\%$	100	0.030	3000
	SIM05470Y3A036	47	$\pm 25\%$	100	0.030	3000
	SIM05520Y3A036	52	$\pm 25\%$	100	0.030	3000
	SIM05600Y3A036	60	$\pm 25\%$	100	0.040	3000
	SIM05800Y3A036	80	$\pm 25\%$	100	0.040	3000
	SIM05101Y3A036	100	$\pm 25\%$	100	0.040	3000
	SIM05121Y3A036	120	$\pm 25\%$	100	0.050	3000
	SIM05221Y3A036	220	$\pm 25\%$	100	0.050	3000
	SIM05301Y3A036	300	$\pm 25\%$	100	0.050	3000
	SIM05601Y2A036	600	$\pm 25\%$	100	0.100	2000
	SIM05102Y1A036	1000	$\pm 25\%$	100	0.300	1000
	SIM05152Y1A036	1500	$\pm 25\%$	100	0.300	1000

CHARACTERISTIC CURVES

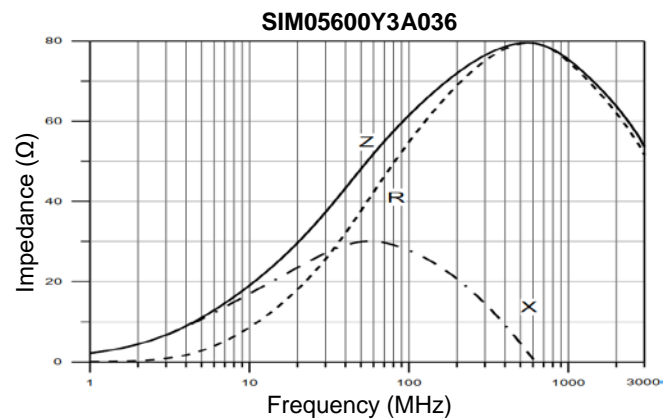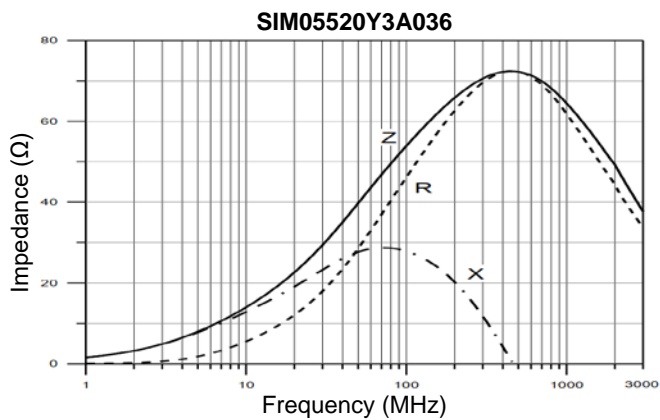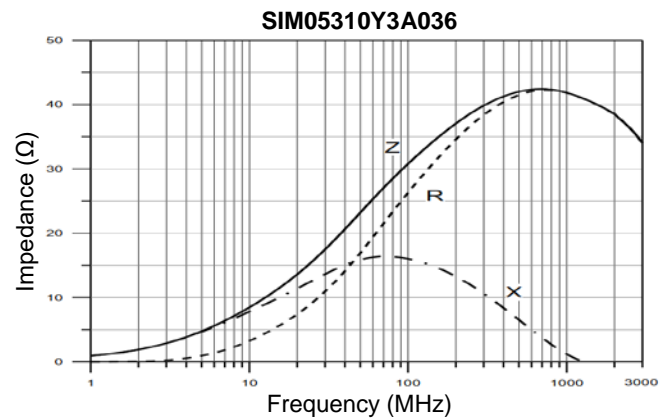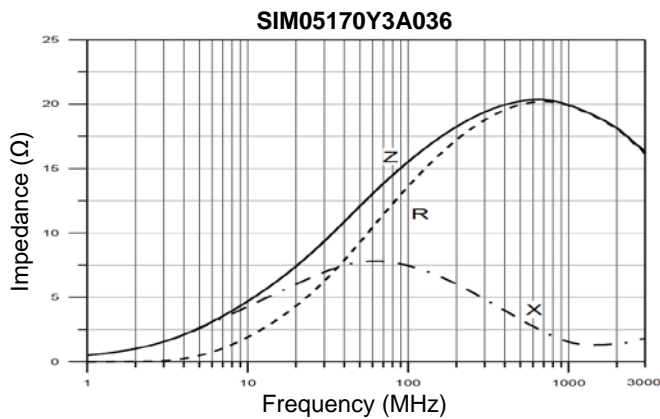


Chip Ferrite Bead High Current type

SIM05-36 Series


MERITEK

CHARICTERISTIC CURVES


SIM05800Y3A036

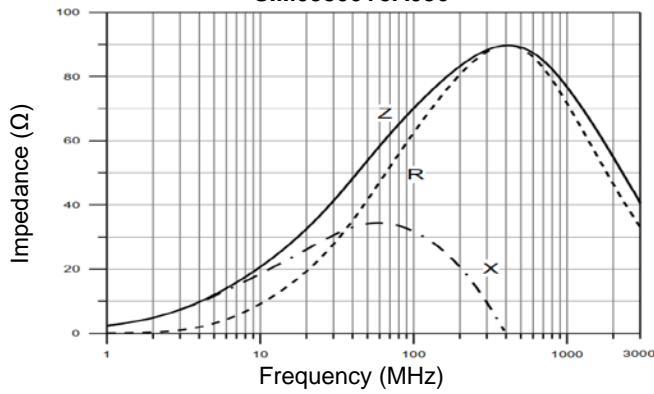


SIM05101Y3A036

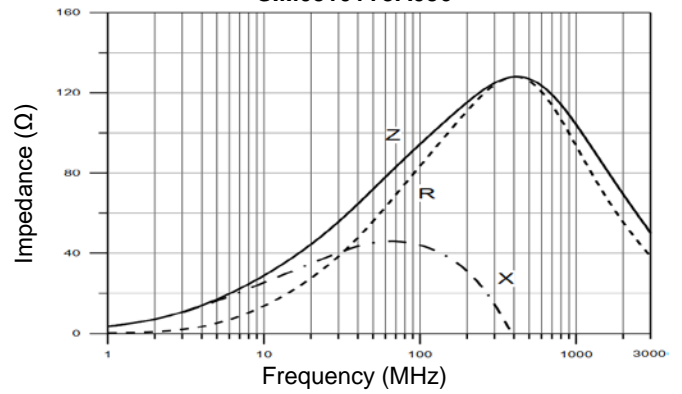


SIM05121Y3A036

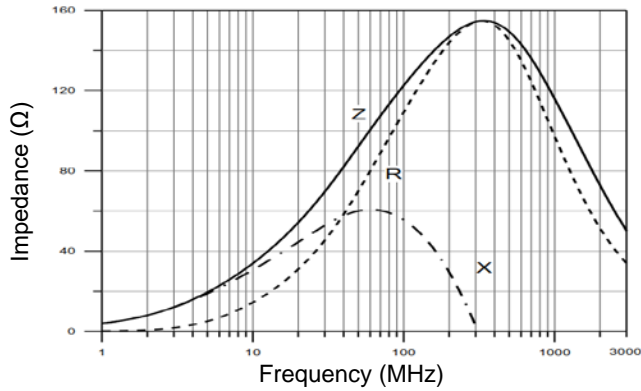


SIM05221Y3A036

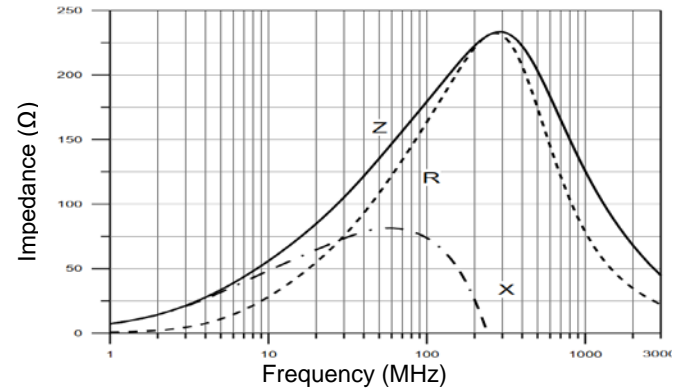


SIM05301Y3A036

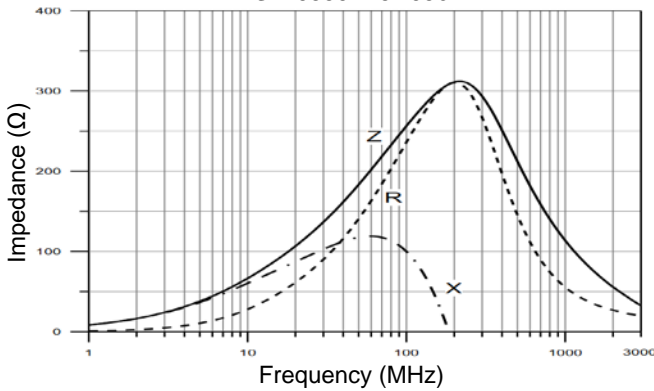


SIM05601Y2A036

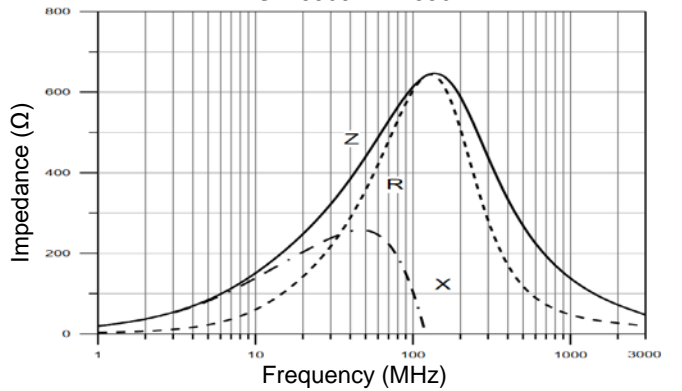

SIM05102Y1A036

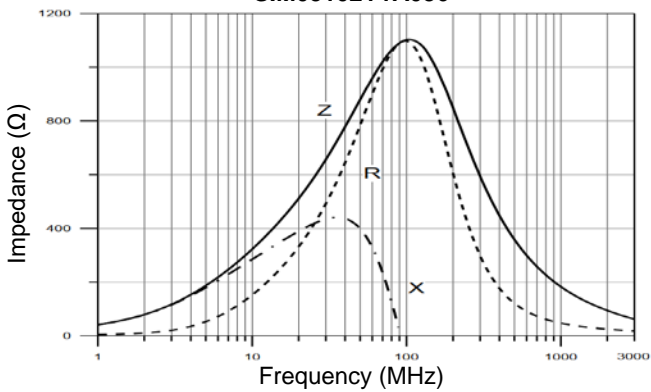

SIM05152Y1A036

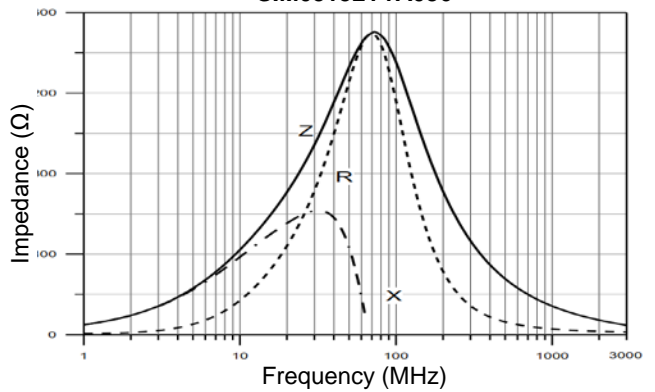

Chip Ferrite Bead High Current type

SIM05-36 Series


MERITEK

RELIABILITY TEST CONDITON AND REQUIREMENT

Item	Test Conditions	Requirement															
Solderability	Solder: Sn-3Ag-0.5Cu, Solder temperature: 240±5°C, Depth: completely cover the termination. Dip time: 3±1sec.	More than 95% of coverage															
Resistance to Soldering Heat	Solder temperature: 265±3°C for 6±1 seconds; Preheating: 100°C ~ 150°C for 1 min. Solder: Sn-3Ag-0.5Cu	Appearance: No damage. Electrical and Mechanical Characteristics shall be satisfied															
Vibration	Oscillation Frequency: 10~2K~10 Hz, Direction: X, Y, X Testing Time: 12 hours (4 hours, 3 orientations)	Appearance: No damage. Impedance: within ±30% of initial value															
Shock	Test condition: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Type</th> <th>Peak</th> <th>Normal</th> <th>Wave</th> <th>Velocity</th> </tr> </thead> <tbody> <tr> <td>SMD</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> <tr> <td>Lead</td> <td>100</td> <td>6</td> <td>Half-sine</td> <td>12.3</td> </tr> </tbody> </table>	Type	Peak	Normal	Wave	Velocity	SMD	100	6	Half-sine	12.3	Lead	100	6	Half-sine	12.3	Appearance: No damage. Impedance: within ±30% of initial value
Type	Peak	Normal	Wave	Velocity													
SMD	100	6	Half-sine	12.3													
Lead	100	6	Half-sine	12.3													
Terminal strength	With component mounted on a PCB apply a force 10N to the side of a device being tested. This force shall be applied for 10 +1 seconds. Also, the force shall be applied gradually as not to shock the component being tested.	Appearance: no damage.															
Thermal Shock	Number of cycles: 1000. Condition for 1 cycle: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>No.</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55±5°C</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 ~ 5</td> </tr> <tr> <td>3</td> <td>+125±2°C</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 ~ 5</td> </tr> </tbody> </table> Measured at room temperature after placing for 24±2 hrs.	No.	Temp. (°C)	Time (min.)	1	-55±5°C	30±3	2	Room Temp.	2 ~ 5	3	+125±2°C	30±3	4	Room Temp.	2 ~ 5	Appearance: No damage. Impedance: within ±30% of initial value
No.	Temp. (°C)	Time (min.)															
1	-55±5°C	30±3															
2	Room Temp.	2 ~ 5															
3	+125±2°C	30±3															
4	Room Temp.	2 ~ 5															
Bending	Device mounted on a test substrate, bend the substrate by 3mm, hold for 10sec and then return.	Appearance: The terminal electrode and the ferrite must not be damaged.															
Load Humidity	Humidity: 85±2%R.H. Temperature: 85±2°C. Duration: 1000hrs Min. with 100% rated current. Measured at room temperature after 24±2 hrs.	Appearance: No damage. Impedance: within ±30% of initial value															
Life Test	Temperature: 125±2°C, Duration: 1000±12 Hrs. Measured at room temperature after 24±2 Hrs.	Appearance: No damage. Impedance: within ±30% of initial value															

RECOMMENDED SOLDERING PROFILES

Reflow Condition		
Pre Heat	Temp. Min $T_{s(min)}$	120°C
	Temp. Max $T_{s(max)}$	180°C
	Time (min. to max.) (t_s)	50 ~ 150 seconds
Reflow	Temp. (T_L)	230°C
	Time (min. to max.) (t_L)	90 ~ 120 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual peak Temperature (t_p)		10 seconds max.
Reflow times:		3 times Max.

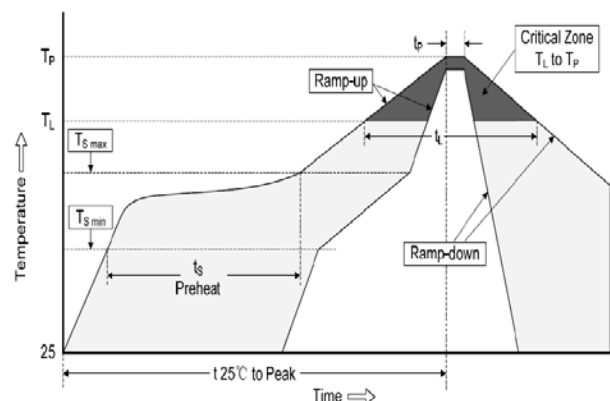

*Specifications subject to change without notice.